

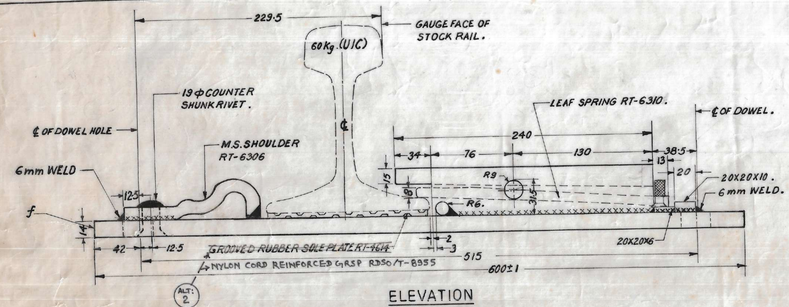



ELEVATION




SIDE ELEVATION

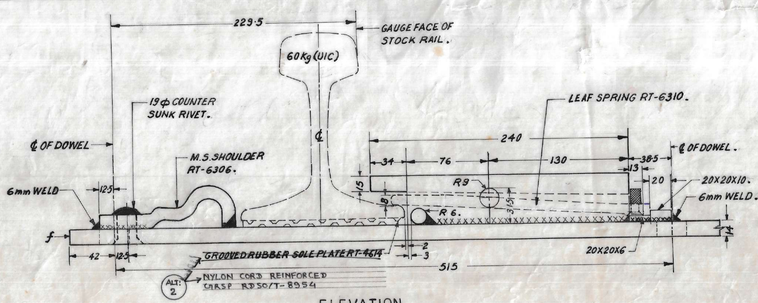


ELEVATION



SIDE ELEVATION

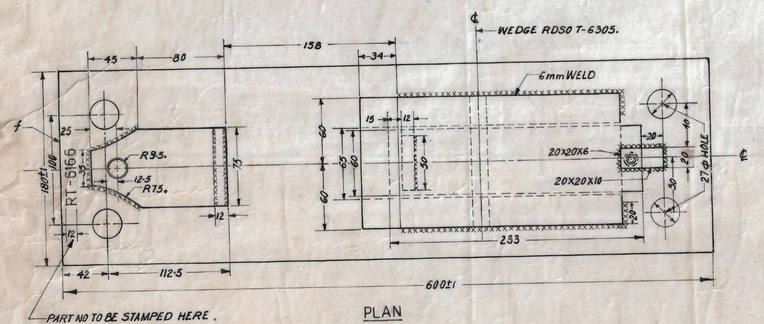

PLAN

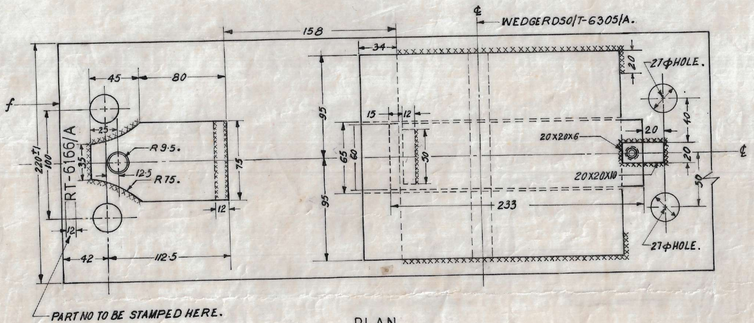

PLAN
(COMBINED WITH TIE PLATE)
SLEEPER No. 3

NOTE

6. MIG PROCESS OF WELDING TO BE ADOPTED.
5. MACHINED SURFACE SHOWN THUS _ _ _ _ _ f.
4. THE SLIDE CHAIR SHALL BE FIXED BY MEANS OF FOUR PLATE SCREWS TO DRG: No. RDSO/T-3912 THROUGH THE ROUND HOLES & SINGLE COIL SPRING WASHER TO DRG: No. T 10773.
3. A TOLERANCE OF 0·8mm EACH WAY IS PERMITTED IN THE POSITION OF HOLES.
2. LATEST ALTERATION NUMBER SHALL BE CHECKED BEFORE PLACING ORDER.
1. ALL DIMENSIONS ARE IN MILLIMETRES.

3. IRS. T 10.
2. IS: 2062-1999.
1. IRS. WELDED BRIDGE CODE FOR WELDING.

SPECIFICATION

MILLIMETRES.
20 0 20 40 60 80

SCALE

ALT:	DESCRIPTION	DATE
2.	GROOVED RUBBER SOLE PLATES REPLACED WITH NYLON CORD REINFORCED CMRSP	20-05-21
1	REVISED & RETRACED.	16.04.04

STAN.B CANC.&B REV.B — ADVANCE 28-11-2002 (T)

RDSO/T-6166 & RDSO/T-6166/A

SG Nos.	10125 mm CURVED SWITCH FOR 1IN 12 TURNOUT WITH ZU-1-60 THICK WEB TONGUE RAILS B.G. (1673 mm) ON PSC SLEEPERS.	RDSO/T-6165
No.	DESCRIPTION.	No.
OFF	FOR DRAWING.	

THIS DRAWING IS THE PROPERTY OF RESEARCH DESIGNS AND STANDARDS ORGANISATION (MINISTRY OF RAILWAYS), LUCKNOW-226011, INDIA AND SHALL NOT BE USED, COPIED OR REPRODUCED IN PART OR WHOLE, WITHOUT PRIOR CONSENT IN WRITING.

R. D. S. O.

SLIDE CHAIRS FOR 10125 mm CURVED SWITCH WITH ZU-1-60 THICK-WEB TONGUE RAILS B.G. (1673mm) FOR 60 Kg (UIC) ON P.S.C. SLEEPERS.