



GET - /bt-consumer/v2/wifi-eligibility - Mediation

Flow

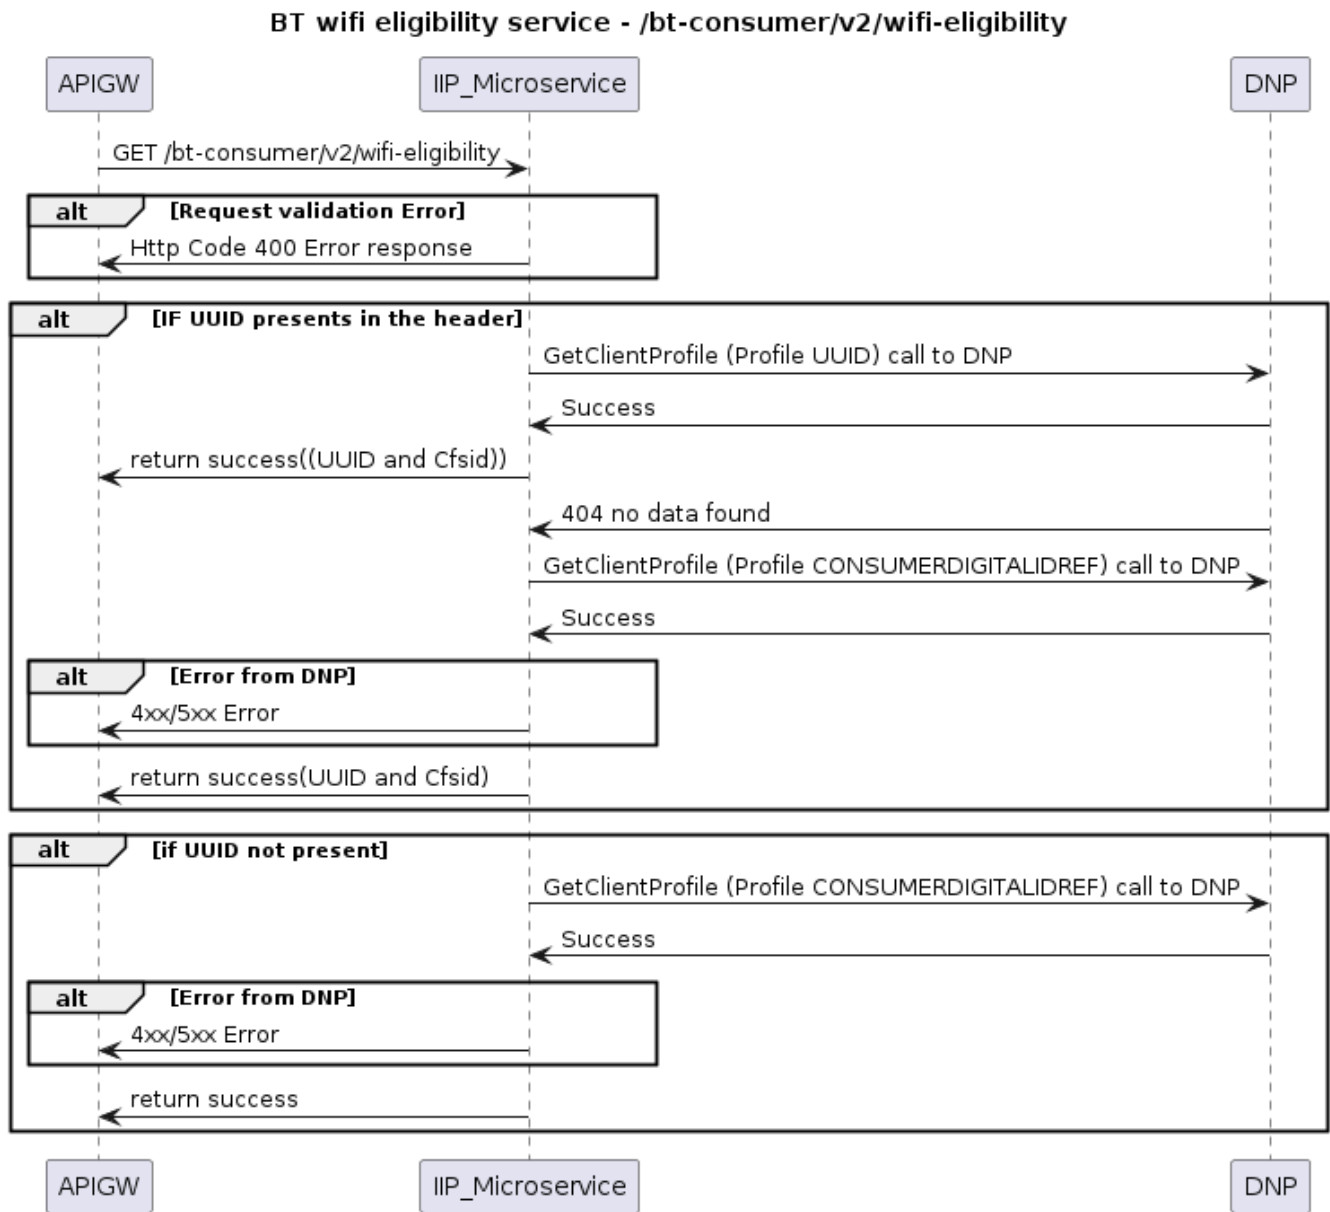

E2E Flow

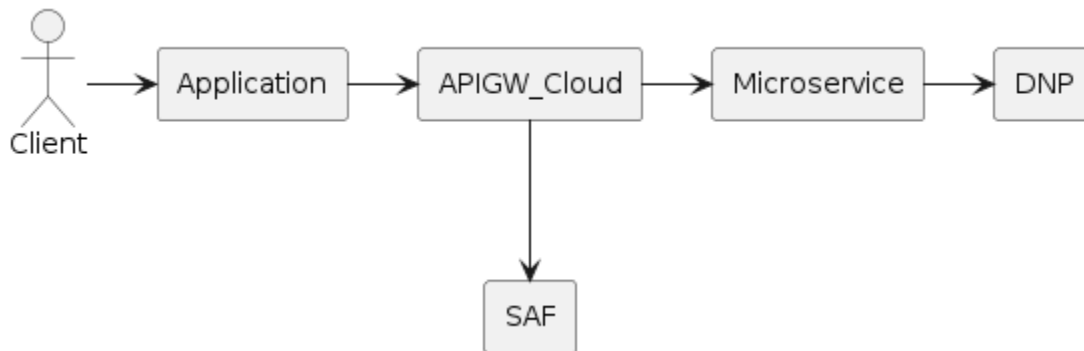

Caching

None

Endpoints

Environment	Endpoint
Test	https://ec.services.vt.dnp.nat.bt.com/v2/domains/UUID/users/{UUID}/Profile
Test	https://ec.services.vt.dnp.nat.bt.com/v2/domains/CONSUMERDIGITALIDREF/users/{CONSUMERDIGITALIDREF}/Profile

Parameter Mapping

Authentication

Basic Authentication using username, password encoding with DNP.

Request

The below table shows the mapping of input parameters to Target parameters.

Service Call	Source field	Target (Downstream call)	Comments
GetClientProfile	Header : X-Profile-Guid	Path : UUID	
GetClientProfile	Header: X-Consumer-Digital-Id-Ref	Path:CONSUMERDIGITALIDREF	

Response

Success Response

Service Call	Source field (Downstream Call)	Microservice Response field	Comments
--------------	--------------------------------	-----------------------------	----------

GetClientProfile	getClientProfileV1Res.clientProfileV1.clientServiceInstanceV1.key	uuid	<p>When DNP response has the match for below values in a clientServiceInstanceV1 instance , then map key to uuid :</p> <p>1. getClientProfileV1Res.clientProfileV1.clientServiceInstanceV1.serviceCode :</p> <ul style="list-style-type: none"> BTWIFI:DEFAULT <p>or</p> <ul style="list-style-type: none"> BTROPENZONE <p>And</p> <p>2. getClientProfileV1Res.clientProfileV1.clientServiceInstanceV1.status:</p> <ul style="list-style-type: none"> ACTIVE <p>In case of multiple instances of clientServiceInstanceV1 matching above conditions, fetch the uuid value from the first matching instance.</p>
	getClientProfileV1Res.clientProfileV1.clientServiceInstanceV1.characteristic.value	cfsid	<p>When DNP response has the match for below values in a clientServiceInstanceV1 instance,</p> <p>1. getClientProfileV1Res.clientProfileV1.clientServiceInstanceV1.serviceCode :</p> <ul style="list-style-type: none"> CONTENTFILTERING:DEFAULT <p>And</p> <p>2. getClientProfileV1Res.clientProfileV1.clientServiceInstanceV1.characteristic.name :</p> <ul style="list-style-type: none"> CFSID <p>then map corresponding value</p>

Error Handling

Service Call	Service error	HTTP Error code	{code}	{message}
GetClientProfile	<p>When no instance in response matches below configuration,</p> <p>1. getClientProfileV1Res.clientProfileV1.clientServiceInstanceV1.serviceCode :</p> <ul style="list-style-type: none"> BTWIFI:DEFAULT <p>or</p> <ul style="list-style-type: none"> BTROPENZONE <p>And</p> <p>2. getClientProfileV1Res.clientProfileV1.clientServiceInstanceV1.status:</p> <ul style="list-style-type: none"> ACTIVE 	403	52	Forbidden user
	4xx/5xx errors from DNP	500	02	Internal Error

References

Downstream Call	Interface Spec of Downstream	Comments
-----------------	------------------------------	----------

DNP -
GetClientProfile

[GCP_Response.xml](#)