
University of Ghana 16 Pair Reconstruction Brief

Annotated view directions and a detailed Claude implementation prompt for the Agriculture, Biotechnology Centre, Child Study Centre and east block area.

The first image of each pair is the current game; the second is the real target. Pair 4 uses the corrected game image. The numbered circles on the following map are the user-supplied camera positions or viewing sectors, and their arrowheads indicate where each pair looks. A multi-arrow number records the spread of one view; it is still one pair.

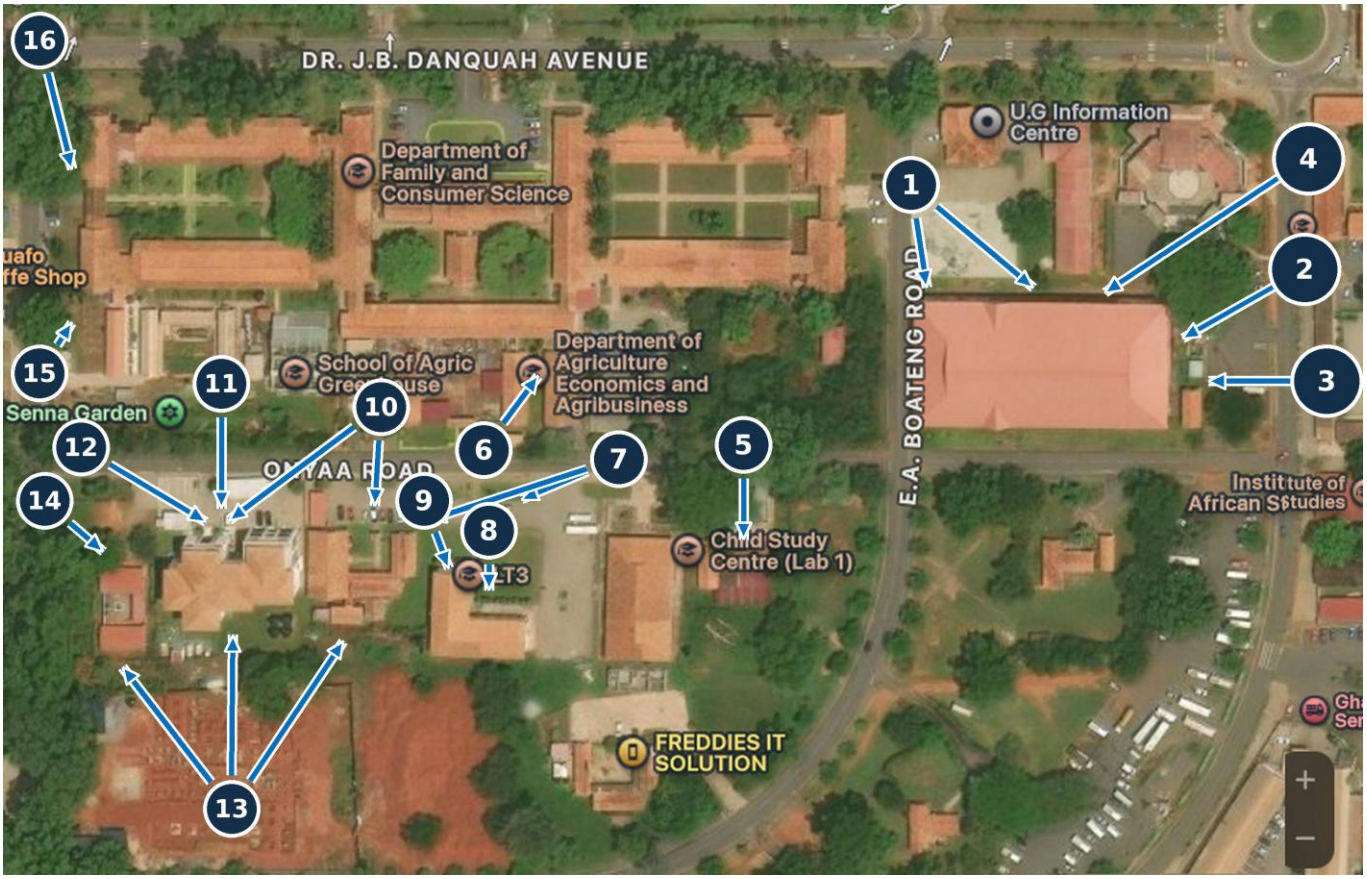


Map reading Dr J.B. Danquah Avenue is along the top, Onyaa Road crosses the middle and E.A. Boateng Road runs vertically near the right. Numbers 1 to 4 identify the large east block; 5 the Child Study Centre; 6 a low colonnaded Agriculture frontage; 7 to 9 the Biotechnology Centre area; 10 to 13 the modern multi-level building south of Onyaa Road; and 14 to 16 the western roadside, trees and low wings.

Evidence rule The map establishes approximate plan relationships and viewing direction. The photos control visible heights, roof forms, windows, ground cover and local access. Aerial views and ground-level views use different camera heights. No supplied image is a measured survey, so keep uncertain offsets, grades and hidden details adjustable.

Map Detail Eastern Block


Enlarged view of arrows 1 to 4. These four comparisons must resolve into one connected building beside E.A. Boateng Road. The map label for the nearby U.G. Information Centre is a landmark; it does not by itself prove the name of the long red-roofed block.

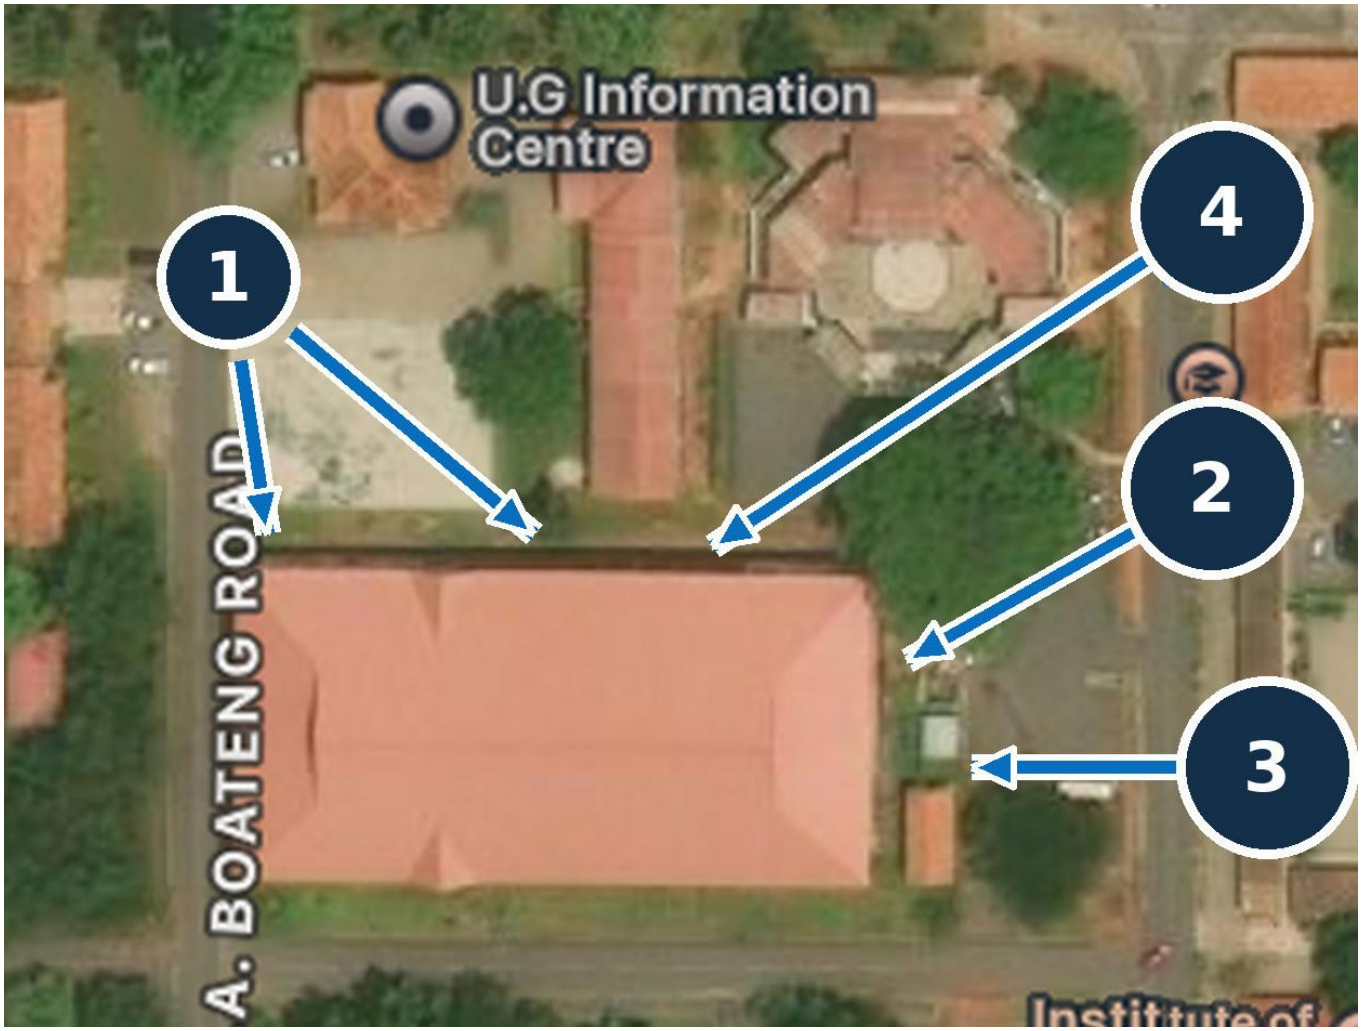

Arrows 1 to 4 point into the roof, frontage and road-side face of the same site. Match its roof from Pair 1 and its elevations and immediate ground from Pairs 2 to 4.

Map Detail Agriculture and Onyaa Road

Enlarged western and central map area. Arrows 7 to 13 overlap because several viewpoints examine neighboring faces and one main multi-level building. The circles mark the annotation positions; arrowheads show the intended scene direction.

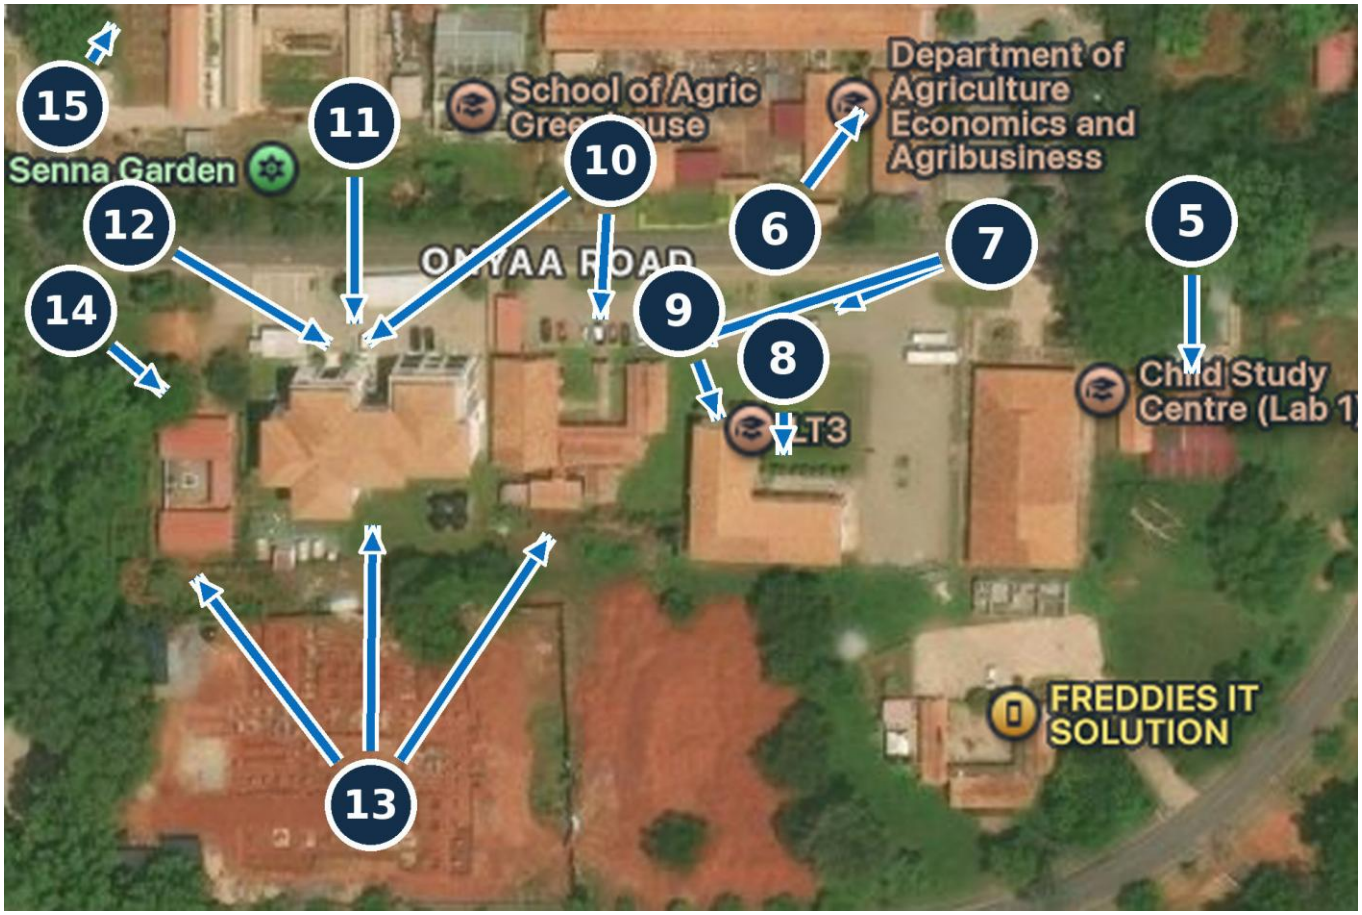

Pair 5 appears at the right edge of this crop. Pair 6 is near the Department of Agriculture Economics and Agribusiness label. The lower three-ray fan is Pair 13, a single aerial rear comparison.

Additional Reference 1 Real World Aerial View




This oblique aerial reference shows the height and roof arrangement of the main modern building and its low neighbors. Compare it especially with Pairs 10 to 13. It is a building-form reference, not a surveyed elevation drawing.

Additional Reference 2 Real World Area Map



This unannotated real-world map shows the actual relative building footprints, roads and labels. Use it to correct the overall plan before adding façade details. The labels name nearby sites but should not override the pair-specific visual evidence.

Additional Reference 3 Current In Game Map

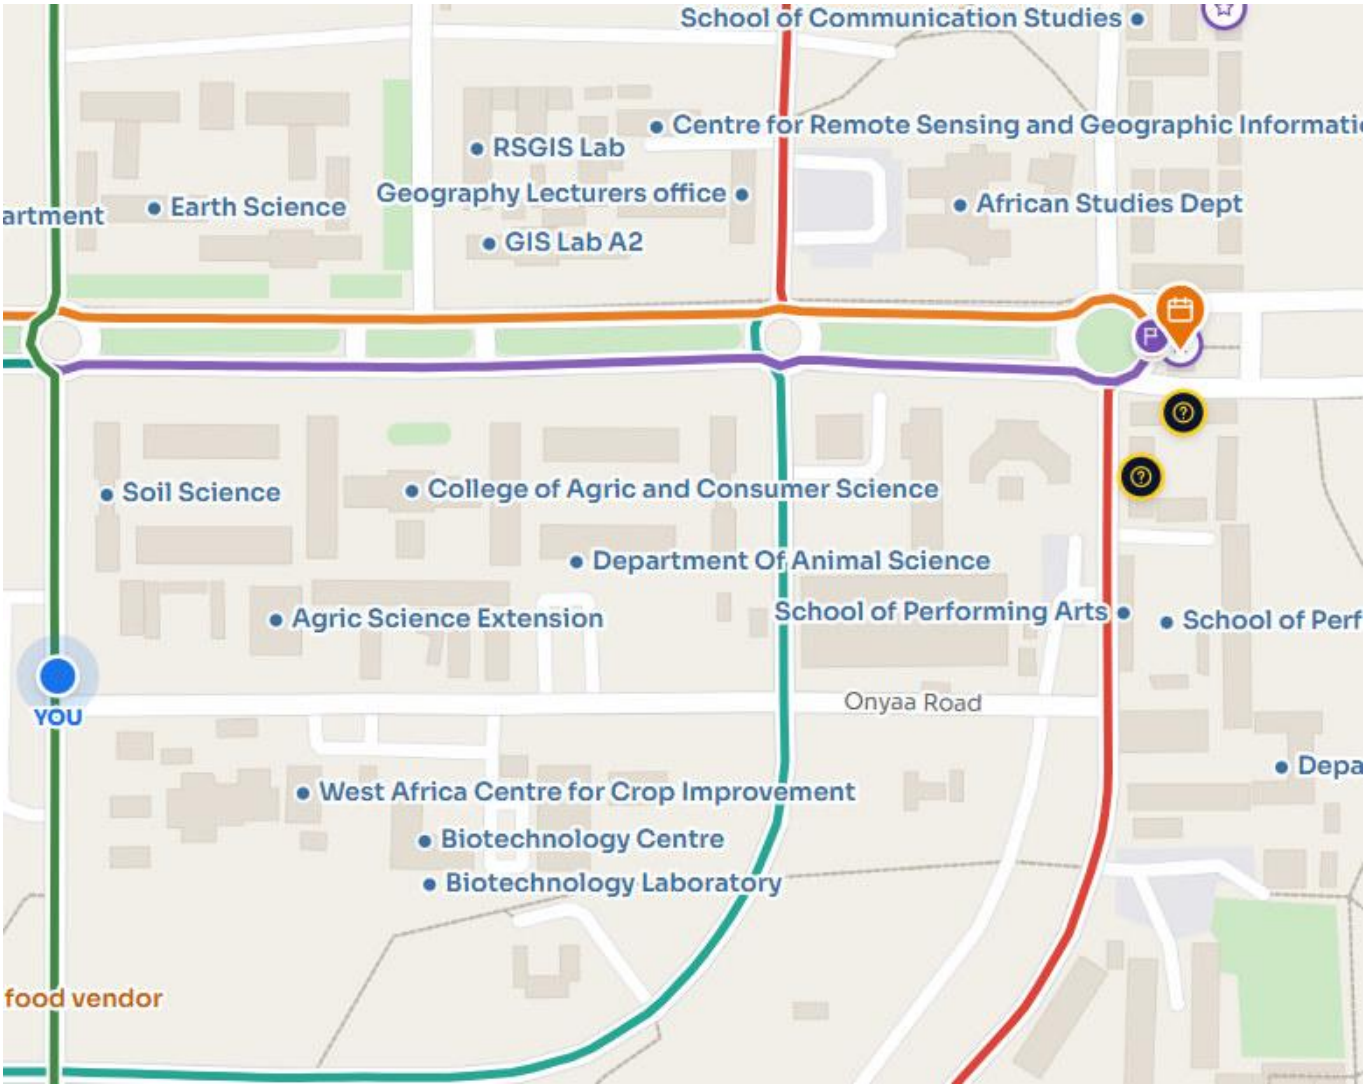

This is the present game map of the same section. It is the before-state for the footprint and road corrections: the placeholder building layout and its connections need to be reconciled with the real-world map above. Keep legitimate route access while fixing the disorganized building arrangement.

Pair 1 Large east block roof and roadside

In-game view	Real-life reference
	

Map position Arrow 1 on the east side of E.A. Boateng Road, below the U.G. Information Centre map label.

Current mistake The game uses a very long, uniform two-storey classroom slab with a repeated square window grid, a simple tiled roof and an open manicured lawn. The aerial reference instead shows an irregular connected roof assembly with broad red corrugated pitches, projecting gables and a deeper front edge. The wall bays and lower frontage vary; service or construction activity occupies the near side.

Build and geometry Use the aerial photograph to rebuild one continuous footprint and its intersecting roof planes. Keep the visible two-level wall beneath deep eaves, but break the repetitive window rhythm into the observed larger and smaller dark openings and recessed bays. Place the projecting gabled portions at the photographed corners. Reconcile the roof with the ground views in Pairs 2 to 4; they must show this same building, rather than four separate models.

Ground and environment Replace the broad uninterrupted green buffer with the photographed road and near-building hardstand, local bare earth, boundary and service edges. Set the mature tree belt behind and beside the building. Treat the vehicles and equipment as optional props, while preserving the permanent front enclosure and visible access geometry.

Acceptance check In a saved aerial comparison, the roof outline, gable placement, road relationship and wall mass should read like the real image. A cyclist rounding the east and front edges must arrive at the views in Pairs 2 to 4 without a position or roof change.

Pair 2 East block frontage and hardstand

In-game view	Real-life reference
	

Map position Arrow 2 looks from the eastern approach toward the same large block.

Current mistake The game places a generic square kiosk and stylized cars in front of a regular two-storey window wall, with a bright lawn and an invented asphalt split. The photograph has a wide worn paved forecourt, a small low roofed structure at the left, temporary corrugated boundary panels, a large branching tree at the right and a much less regular elevation under a deep dark fascia.

Build and geometry Retain the shared roof and footprint established in Pair 1. Form the upper wall with varied dark windows and the lower level with entrance recesses, shuttered or barred openings and substantial blank wall. Set the real access openings, fence line and small left-hand shelter at their observed scale. The corrugated panels may be managed as a construction-state layer, but their alignment must not be replaced by a free-standing decorative fence.

Ground and environment Shape the forecourt as continuous asphalt or worn hard surface adjoining the road, with dusty margins and sparse weeds. Place the broad tree canopy to cast irregular shade over the right side. Remove the oversized uniform grass lawn, identical ornamental trees, toy-like vehicles and unsupported crossing road geometry. Cars and the truck are transient and may be optional.

Acceptance check The road-facing scene should be dominated by the real two-level façade, open hardstand, small shelter, fence and tree. Camera matching must compare the same side of the Pair 1 building.

Pair 3 East block entrances and service frontage

In-game view	Real-life reference
	

Map position Arrow 3 approaches the eastern front or service face shown by Arrow 2.

Current mistake A standalone tiled pavilion and cloned window bays obscure the game frontage. The photograph shows substantial recessed openings at ground level, a short elevated access or landing with black handrails, varied upper glazing, narrow high ventilation, a low corrugated-roof shelter, sheet-metal service enclosure and weathered temporary panels.

Build and geometry Open the ground-floor bays to real depth, model the short landing or ramp and its black rail, and vary upper window widths and heights according to the photo. Add the low shelter and metal enclosure as separate simple meshes where visible. Do not use the game pavilion as a substitute for either object. Match the dark roof fascia and white piers to the adjoining views.

Ground and environment Replace the fresh lawn immediately at the frontage with worn pavement, exposed soil, debris, sparse weeds and the real fence line. Keep equipment and construction material removable, but preserve the physical service apron, access threshold and enclosure volumes. Avoid adding labels or screenshot controls to the world.

Acceptance check At the comparison camera, the sheltered foreground, recessed entrance bays, rail and varied windows must line up. Turning toward Pair 4 should expose a consistent long side elevation.

Pair 4 Long east block side elevation

In-game view	Real-life reference
	

Map position Arrow 4 looks back along the same large block from the road to its east.


Current mistake The corrected game screenshot now shows the intended side, but gives it a perfectly even two-row window grid beside empty grass. The real side stands directly along an asphalt road, behind a long weathered corrugated hoarding. Its upper windows vary; small high vents, a deep black fascia, open or recessed lower bays and a gabled roof break appear down the length. Large branches frame the near view.

Build and geometry Use the Pair 1 to 3 shared building. Change the lower row from cloned windows to the photographed sequence of door, window, recess and blank bay. Introduce the small high horizontal vents where visible. Carry the dark eave and intersecting roof/gable silhouette continuously along the length. Keep the real end spacing and avoid stretching one repeated façade module to fill the entire wall.

Ground and environment Run the asphalt road close to the wall. Add the temporary fence or hoarding with its irregular vertical texture, a narrow edge or curb, shaded ground and mature overhead canopy. Remove the grass corridor and small evenly spaced game trees. The fence may have a removable construction-state switch, but the roadway alignment must remain.

Acceptance check A ride along this road should reveal the Pair 2 and 3 façade around the corner. The image must show asphalt and hoarding in the foreground, not a wide lawn.

Pair 5 Child Study Centre compound

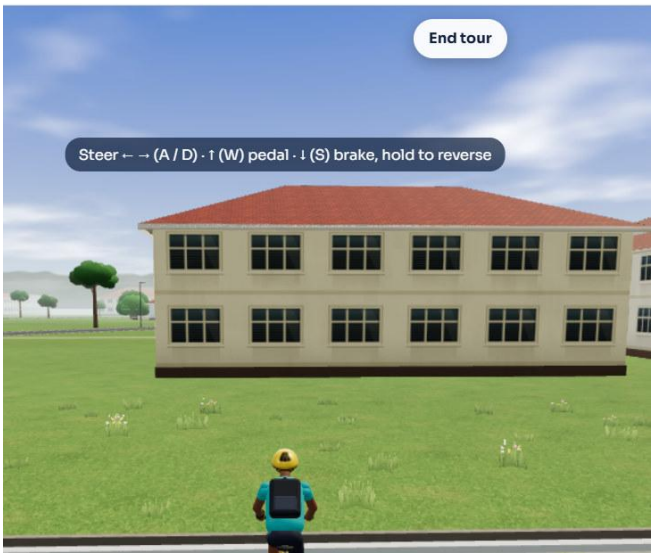In-game view	Real-life reference
	

Map position Arrow 5 points to the Child Study Centre Lab 1 area on the real map.

Current mistake The game substitutes a plain two-storey classroom block and grass. The real image is taken at a tall wire-mesh gate into a small child-focused compound. A light gravel or compacted surface curves around planted earth; low white buildings have red roof tiles and color-blocked lower walls, while tire edging and simple outdoor play elements mark the yard.

Build and geometry Remove the unsupported two-storey placeholder at this selected spot. Build the visible low gable-fronted building, connected low rear structure, doorway/window pattern, tall mesh gate with frame and posts, and the play-yard boundary. Only reproduce equipment whose shape is actually visible; do not invent a full interior or playground plan behind the camera.

Ground and environment Use a pale granular yard with compacted patches, the curved red and green edging, partly painted tires, bare planting island and trees beyond the fence. Keep a practical concrete threshold at the gate. Let pedestrians and movable play objects be optional. Ensure the bicycle route does not pass through the closed mesh gate by default.

Acceptance check From the gate camera the mesh, curved yard edge and low red-roofed buildings must read immediately. The block must no longer look like a two-storey generic school wing.

Pair 6 Shaded single-storey colonnade

In-game view	Real-life reference
	

Map position Arrow 6 lies near the Department of Agriculture Economics and Agribusiness label; use the arrow, not the label alone, for placement.

Current mistake The game shows tall repeated window blocks around a flat lawn. The real view is a low verandah with a pitched roof, deep dark eaves, square white columns with red-brown lower portions, black shuttered doors and windows, and a narrow paved circulation strip. A planted bed sits slightly higher than the outer path.

Build and geometry Make this photographed frontage a one-storey colonnaded wing on the mapped footprint. Set the column rhythm and veranda depth before adding door recesses, plaques, grille or shutters, paving joints and the short access steps at the right. Retain adjoining roof connections only when supported by the map and adjacent photographs; do not turn every nearby Agriculture building into this same template.

Ground and environment Model the low retaining edge of the grass bed, narrow tile or concrete veranda, potted plants and small shrubs. Use tree-filtered light and realistic worn white paint with localized stains. Replace the wide unbroken game lawn in front of the wall with the photographed planted and circulation surfaces.

Acceptance check A rider should see a continuous one-storey shaded walkway with usable clearance at the columns, real shallow level transitions and dark entrances, rather than a protruding generic two-storey block.

Pair 7 Biotechnology Centre road approach

In-game view	Real-life reference
	

Map position Arrow 7 covers the road-facing approach to the low complex around the Onyaa Road and LT3 area.

Current mistake The game makes a broad geometric junction beside many identical two-storey blocks and simplified trees. The real road view has a coherent white, low two-level L-shaped complex with long tiled wings and a pronounced end gable, parking and landscaped frontage, a bus or cars, a narrower access opening and a tree-lined background.

Build and geometry Block out the connected wing footprint, roof hips and gable first. Establish the roadside elevation, upper dark window band, lower entrance recesses and the gabled end that becomes clear in Pairs 8 and 9. Reuse this same model for all three cameras. Set the building back at the distance shown by the road, verge and parking, rather than placing separate small blocks across the lawn.

Ground and environment Rebuild the asphalt carriageway, lane marking, curb, paved parking or access, planted median or island and trimmed trees. The bus and parked cars are scale cues, not permanent site geometry. Avoid the unsupported sharp triangular asphalt split and uniformly clipped grass.

Acceptance check The road-side panorama must expose the same gable and long wing later seen close up, with plausible access and parking. Keep bicycle collision on the paved surfaces.

Pair 8 Biotechnology Centre entrance frontage

In-game view	Real-life reference
	

Map position Arrow 8 continues toward the gabled frontage identified by Pairs 7 and 9.

Current mistake The game has several detached regular blocks in a flat open field. The real building is one linked two-level complex: a high white gable with sign, dark eave, long low tiled side wing, dark barred windows, ground entrance, AC units, clipped hedge and small rounded trees along a central approach path.

Build and geometry Shape the gable as a mostly solid white wall with a simple dark roof edge. Connect it to the left wing under the continuous tiled roof. Put the sign at the photographed elevation, the dark entrance or security grille below, and equipment under the eaves where visible. Keep the different window rhythms of the front and side; do not populate the gable with the game window grid.

Ground and environment Lay out the hedge boundary, narrow central pedestrian walk, short turf and carefully placed small trees. Keep road and curb in the foreground. The shrubs need realistic irregular crowns and shadows rather than evenly spaced spheres. Use worn roof tile variation and restrained plaster stains.

Acceptance check The central gabled end, sign, approach opening and long left wing should match in one camera, and remain identical from the close Pair 9 view.

Pair 9 Biotechnology Centre gable detail

In-game view	Real-life reference
	

Map position Arrow 9 targets the same end wall as Pair 8, at a closer viewpoint.


Current mistake The game fills the entire near wall with two bands of identical large windows and open grass. The reference end wall is substantially blank under a gable, has a high department sign, two visible wall-mounted AC condensers, a recessed barred lower entrance, a red-brown base and a short row of pruned trees. The adjacent path and building edge have specific positions.

Build and geometry Use the Pair 7 and 8 gable mesh. Put the readable sign on the wall where shown; its major wording reads Biotechnology Centre, University of Ghana, Legon. Match the broad empty wall area, roof fascia, equipment mounting and bottom grille. Do not invent a full logo detail if no usable asset is supplied.

Ground and environment Replace blank lawn with the actual narrow path edge, modest grass patch, tree wells and clipped canopies. Ground AC supports and drains. Keep lighting natural; a camera exposure difference should not be painted into the wall material.

Acceptance check The close camera should read as a largely solid signed gable with equipment and pruned trees, not another repeated classroom façade.

Pair 10 Multi-level building aerial and footprint

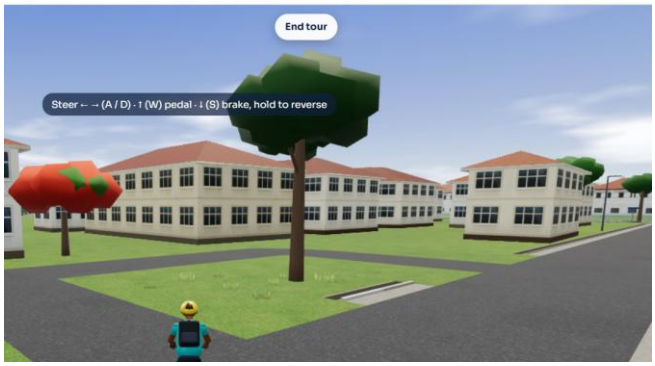In-game view	Real-life reference
	

Map position Arrow 10 spans the building cluster south of Onyaa Road and west of LT3.


Current mistake The game shows a field of disconnected identical two-storey blocks, grass strips and invented intersections. The drone reference shows one dominant modern white multi-level building with a complex terracotta tiled roof, paved parking facing the road, a tall central entrance volume, a lower connected service wing and nearby older low buildings.

Build and geometry Replace the selected placeholder cluster with a single shared footprint for Pairs 10 to 13. Build the central and projecting masses to the aerial outline; use the front, oblique and rear photos to resolve floor levels. The rear shows four visible tiers in places, while the front hides some height behind tall entrance and parapet forms. Create the roof hips and connections before repetitive windows. Preserve the separate low neighbors as separate low buildings.

Ground and environment Lay out the forecourt along the photographed road edge with real parking bays, pale interlocking paving, short curved lawn strips and appropriate vehicle access. Preserve the rear lawn and side service path as different surfaces. Position mature trees and low roofs using the drone view rather than the in-game road network.

Acceptance check The roof footprint and main mass should match the aerial silhouette, with the correct road-facing parking orientation; Pairs 11 to 13 must belong to this one building.

Pair 11 Multi-level building main entrance

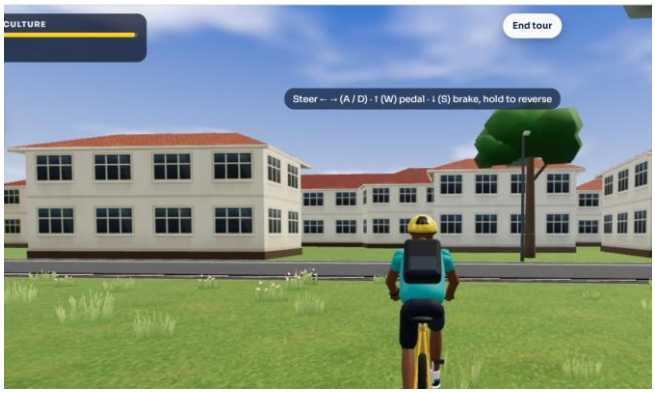In-game view	Real-life reference
	

Map position Arrow 11 looks from the Onyaa Road side toward the building introduced in Pair 10.

Current mistake The game repeats two-storey box blocks across grass. The real front is a distinctive modern white façade: left stacked decorative metal screens, a central recessed vertical portion, a massive tall glazed entrance at right between white piers, shallow projecting terrace or canopy lines and several hipped red roof masses. Parking paving occupies the entire near foreground.

Build and geometry Build large structural wall volumes and voids first. Model the screened bays with repeatable patterned panels, varied glazing, balcony or parapet rails and the tall entry portal. Keep roof breaks consistent with Pair 10 and avoid cloning one window into every bay. Position the entrance doors at the back of the deep recess, and show actual screen thickness from bicycle height.

Ground and environment Use interlocking pavers or comparable small-unit parking surface, bay line markings, curved white curb-bounded planted islands and narrow access walks. Include a few optional accurately scaled vehicles to check depth, but keep parking usable without them. Add subtle stains on white planes only where supported.

Acceptance check The front must read as a single multi-level landmark with a tall right entrance and left lattice panels. The building and parking should remain correctly aligned when crossing to Pair 12.

Pair 12 Multi-level building oblique parking view

In-game view	Real-life reference
	

Map position Arrow 12 looks diagonally across the same forecourt and entrance.

Current mistake The game gives a row of small plain two-storey blocks, rigid hedges and a low-poly tree. The target view shows the same tall white landmark obliquely, its deep central doorway and upper volume, parked vehicles on light pavers, a simple vehicle shelter at the right and a large branching foreground tree masking part of the façade.

Build and geometry Reuse the Pair 10 to 11 building with consistent screen panels, roof eaves, entrance depth and window proportions. Add the carport as a separate light frame and thin roof only at the photographed side. Do not grow an extra storey or move the entrance solely to match the oblique view; align the comparison camera first.

Ground and environment Ground the parking apron, side planting and road curb. Shape the foreground tree with a thick irregular trunk and wide, partially sparse branches; its occlusion is a key composition cue. Keep parked vehicles transient and ensure trees do not obstruct the rideable road.

Acceptance check The oblique view must reveal the identical entrance and roof from Pair 11, with correct near-tree occlusion and paved parking scale.

Pair 13 Multi-level building rear and service yard

In-game view	Real-life reference
	

Map position Arrow 13 is a three-ray viewing wedge south of the main building, showing its rear and neighboring low structures.

Current mistake The game exposes a flat empty lawn facing a continuous strip of generic two-storey windows. The drone target shows the multi-level landmark from behind with a projecting central wing, several stacked window and small balcony tiers, a linked tiled roof, uneven grass and soil, a side service path, adjacent low roofed buildings and black cylindrical water tanks at the right.

Build and geometry Keep the same footprint and roof from Pairs 10 to 12. Build the rear projecting volume and visible four-tier vertical rhythm, dark rectangular window recesses, metal balcony rails and raised base. Position the black water tanks on their pale rectangular plinth, without inventing hidden plumbing. Place the low buildings separately, connected only where the aerial view supports it.

Ground and environment Use short but imperfect grass with exposed reddish patches and small utility covers, a narrow hard route along the left, mature canopy farther back and local shadow from the building. Respect the subtle ground-to-base relationship; do not flatten the rear apron to a generic grass plane or claim a surveyed grade from the drone view alone.

Acceptance check The rear camera should clearly show one four-tier projecting element, true roof intersections and the tanks at the right. Riding around the building should not expose mismatched façade heights.

Pair 14 Low roadside buildings and mature tree

In-game view	Real-life reference
	

Map position Arrow 14 sits west of the Onyaa Road approach shown in the map.

Current mistake The game shows more repeated two-storey blocks, uniform grass and an engineered street split. The real reference is a low roadside group with white walls, red-brown base, weathered red tile gables, a grille-fronted opening, a perforated wall section, hedge, and a huge mature tree trunk rooted in a small curb-bounded island.

Build and geometry Replace only this arrow-selected site with the low one-storey massing. Match two roof heights and gable ends, dark door and barred openings, breezeblock portion and low plinth. Keep neighboring footprints based on the aerial map, not the game placeholder grid. Preserve the tree trunk clearance and curb geometry.

Ground and environment Make the road and small parking/turning area worn asphalt, with patchy stains, a curved curb island and planted or exposed soil at the tree. Extend realistic broad canopy across the scene. Shrubs should partly screen the wall without covering the distinct door and grille.

Acceptance check The street view must be visibly single-storey and dominated by the mature trunk and low frontage. No cloned two-storey block should occupy this photographed position.

Pair 15 Tree-lined junction and green boundary

In-game view	Real-life reference
	

Map position Arrow 15 points toward the western tree-covered access on the map.

Current mistake The game clears the area for a huge lawn and rigid intersecting roads, with duplicate blocks in full view. The photograph is mainly a mature-tree road junction: a curved brick-paved sidewalk, dark asphalt, irregular grass verge, a green sheet or mesh perimeter fence, a few slim poles and a right-hand road continuing through dense canopy.

Build and geometry First rebuild the real road junction and the fence line; allow hidden buildings only where map footprints support them. Curve the walking surface and curb to the photograph and keep the rightward route continuous. Place the sign back, lamp posts and small gate features at realistic sizes, while avoiding made-up building fronts beyond the opaque green barrier.

Ground and environment Give the foreground trunk broad roots and canopy, with leaf shade on the road and brick paving. Use uneven turf and local bare soil at roots and fence. Treat the apparent uphill perspective as a local grade question to verify from adjacent views; do not manufacture a steep slope from one image.

Acceptance check At bicycle height this should read as a shaded road fork with a green enclosure and curved pedestrian edge, not a lawn surrounded by generic two-storey buildings.

Pair 16 Roadside low wings and drainage edge

In-game view	Real-life reference
	

Map position Arrow 16 starts by Dr J.B. Danquah Avenue and points along the northwestern low-building frontage.

Current mistake The game has a broad clean street flanked by cloned two-storey wings, large floating location labels and extra median-like geometry. The real photo shows a narrower asphalt carriageway, a shallow open edge drain, a broad brick pedestrian surface, very large irregular tree trunks and a line of old single-storey white buildings with red lower walls and aged tiled roofs.

Build and geometry Replace the selected road-facing placeholder with low gabled and hipped wings matching the real sequence. Vary the dark small windows, doors and simple porch openings; add a freestanding signboard only with legible text. Keep the buildings set back behind trunks as shown. Do not convert nearby taller buildings elsewhere because this frontage is low.

Ground and environment Match the brick pavement pattern, continuous shallow drain, asphalt edge, rough tree roots, scattered earth and subdued shade. Keep the road and footway at their observed local levels so bicycle wheels follow the real surface. Remove floating game labels and HUD from comparison renders, while preserving normal play UI.

Acceptance check The view should prioritize the long low frontage, two dominant trees and pavement/drain relationship. Riding between Pairs 15 and 16 must preserve connected roads and natural local grades.

Consolidated Prompt for Claude

Implement the next reconstruction pass in my existing University of Ghana 3D bicycle exploration game. Use the 16 game and real pairs, the cleaned numbered-arrow map and three additional aerial and map references in this document. For each pair, the left image is the current game and the right image is the real target. Pair 4 contains my corrected in-game screenshot. Numbers 1 to 16 on the map correspond exactly to Pairs 1 to 16; some numbers have several rays to show the breadth of one view. Preserve previous work elsewhere on campus and integrate this area into the same navigable world.

First inspect the current scene organization, building generator, map coordinates, terrain, road meshes, bicycle collision, vegetation system and rendering cameras. Establish a shared site coordinate plan from the real-world map. Use the supplied annotation for camera orientation, the aerial views for roof and footprint relationships, and the ground photos for elevations and immediate surfaces. Treat screenshot HUD, floating labels, watermarks, drawn arrows and map labels as reference overlays, never physical objects. Do not claim precise dimensions, ownership or hidden construction from the photographs.

Required zone corrections

1. Pairs 1 to 4: Replace the uniform long east block with one connected two-level building, intersecting red corrugated roof pitches and gables, deep dark fascia, varied upper windows and open or recessed lower bays. Keep the front hardstand, small shelter, fence, landing and long roadside asphalt/hoarding consistent across all four cameras. The corrected Pair 4 game image is the baseline for the side view.
2. Pair 5: Replace the generic two-storey block with the low Child Study Centre compound, wire-mesh gate, pale gravel or compacted yard, low white/red-roofed buildings, curved tire edging and sparse visible play elements.
3. Pair 6: Rebuild the selected Agriculture-side frontage as a single-storey covered colonnade with white square piers, red-brown lower wall, dark shutters/doors, tiled veranda, shallow steps and raised planted bed.
4. Pairs 7 to 9: Make one continuous two-level Biotechnology Centre building with a long tiled wing and a mostly blank signed gable. Add the real barred entry, two visible AC units, dark eaves, approach path, trimmed trees and clipped hedge. Fit the road, parking and curb so all three camera views are consistent.
5. Pairs 10 to 13: Replace the disconnected two-storey block field with the distinctive modern multi-level building. Match the multi-hip roof footprint, tall front entrance, left patterned screens, central recess, rear projecting four-tier window and balcony rhythm, light paved parking, rear grass/service path and black tanks on a plinth. The aerial, front, oblique and rear references must describe one building and its low neighbors.
6. Pair 14: Restore the low white roadside buildings with red base, tile gables, grille openings, hedge, worn asphalt and the huge tree in its small curb island.
7. Pairs 15 and 16: Rebuild the tree-lined junction, green boundary, curved brick paving, actual connected road and the separate low roadside wings. Pair 16 includes the shallow open drain and brick footway. Keep mature trunks and roots, rather than a grid of identical small trees.

Geometry and terrain sequence

Block out footprints, building storeys, roof intersections, junction paths and ground levels first. Validate all 16 camera headings before detailing. Then add observed openings, grilles, screens, shutters, canopies, gates, tanks, road edges, curbs and drains. Add trees, roots, hedge, soil, tile and paint weathering last. Use local geometric level changes at steps, parking edges and the shallow drain. Do not turn perspective convergence into a steep road grade. Keep asphalt on supported roads, interlocking or brick paving where photographed, granular ground inside the Child Study compound and imperfect grass or reddish exposed soil at planted and rear service areas.

Shared assets and visual calibration

Make Pairs 1 to 4, Pairs 7 to 9 and Pairs 10 to 13 shared buildings, each with stable corners and roof edges. Edit only the selected objects; other campus buildings should not be globally reduced or restyled. Match a real reference camera by approximate position, heading, elevation and field of view before judging size. Drone images are elevated, while game screenshots are at bicycle height. Use the aerial map to place every building, then inspect the real photo to set material and local ground. Use varied mature Ghanaian campus tree silhouettes with wide, irregular branching, overlapping canopy and patchy shade. Keep temporary fences, vehicles, playground props and construction equipment switchable when sensible, without letting them determine permanent geometry.

Rideability and review

Maintain rideable connections on Dr J.B. Danquah Avenue, Onyaa Road, E.A. Boateng Road and the photographed access lanes. Bicycle wheels must follow the rendered terrain and curb transitions. Use simple accurate collision volumes for walls, fence, trunks, tanks, veranda columns, railings and steps. Do not erase real steps just to create a shortcut. Avoid duplicate hidden buildings, floating curbs, intersecting roofs, z-fighting and excessive repeated window meshes. Instance repeated roof tiles, grilles, hedges and foliage for performance.

Provide 16 saved comparison cameras, clean before-and-after renders from those cameras, and an aerial/map overlay or coordinates showing the updated footprints and routes. Compare every render to its real partner for roof silhouette, storey count, building spacing, façade openings, ground surface, local level and canopy occlusion. Supply a short list of scene/code changes and specific remaining unknowns that would need a measured dimension or additional view. The acceptance statements under each pair in this document are the final checklist. Do not say the reconstruction is exact unless the evidence supports it.