


Практика 10

Создал конструкцию

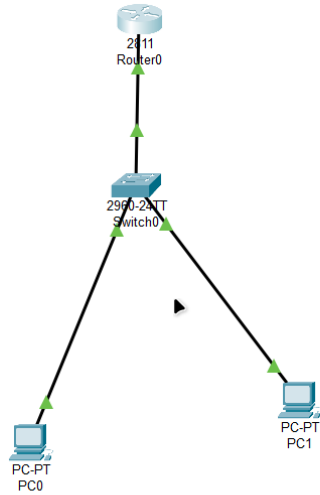

```
Router(config-if)#ip address 192.168.0.1 255.255.255.0
Router(config-if)#ip dhcp pool vashname
Router(dhcp-config)#network 192.168.0.0 255.255.255.0
Router(dhcp-config)#default-router 192.168.0.1
Router(dhcp-config)#dns-server 7.7.7.7
Router(dhcp-config)#exit

Router(config)#ip dhcp excluded-address 192.168.0.3
Router(config)#exit
```

```
PC0
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ip
Invalid Command.
C:\>ipconfig

FastEthernet0 Connection: (default port)

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: FE80::2D0:BCFF:FEE2:C312
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 192.168.0.2
    Subnet Mask . . . . .: 255.255.255.0
    Default Gateway . . . . .: 192.168.0.1

Bluetooth Connection:

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: ::
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 0.0.0.0
    Subnet Mask . . . . .: 0.0.0.0
    Default Gateway . . . . .: ::

C:\>
```

```
PC1
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ipconf
Invalid Command.
C:\>ipconf
Invalid Command.
C:\>ipconfig

FastEthernet0 Connection: (default port)

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: FE80::2E0:A3FF:FEC7:4C56
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 192.168.0.4
    Subnet Mask . . . . .: 255.255.255.0
    Default Gateway . . . . .: 192.168.0.1

Bluetooth Connection:

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: ::
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 0.0.0.0
    Subnet Mask . . . . .: 0.0.0.0
    Default Gateway . . . . .: ::

C:\>
```

```
C:\>ping 192.168.0.2

Pinging 192.168.0.2 with 32 bytes of data:

Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss)
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```