
BSPD 2027 — ENGINEERING REVIEW / CALIBRATION REQUIRED


Same Molex connector and pinout. Hardware only. External normally-open high-side shutdown relay required.

All trimmers removed: thresholds are selected by soldered precision resistors.


1. CONNECTOR




2. PROTECTED SUPPLY / REFERENCE

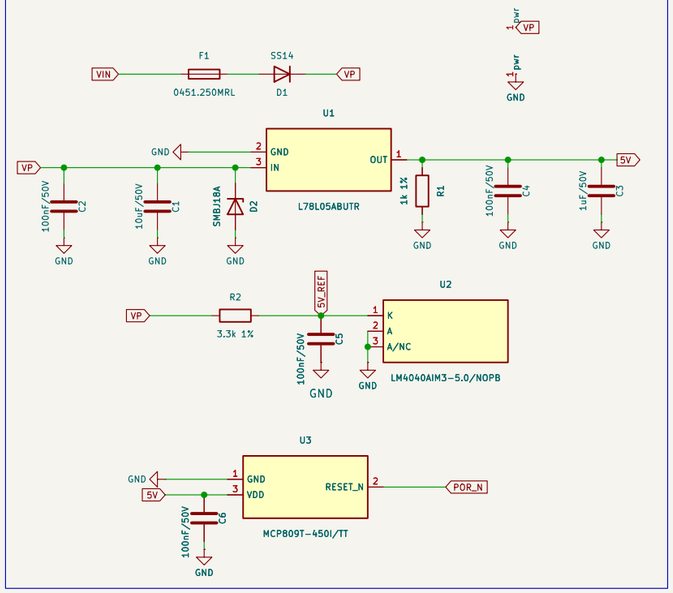


3. CURRENT / SENSOR FAULTS / UV

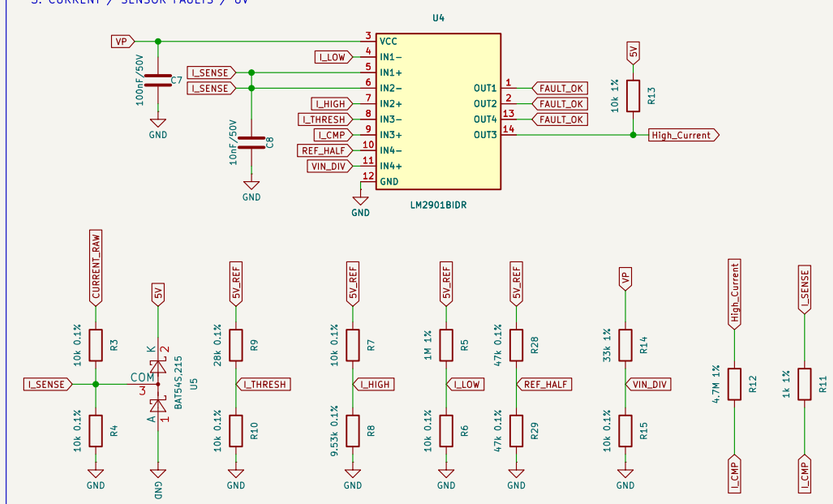


4. BRAKE / SENSOR FAULTS

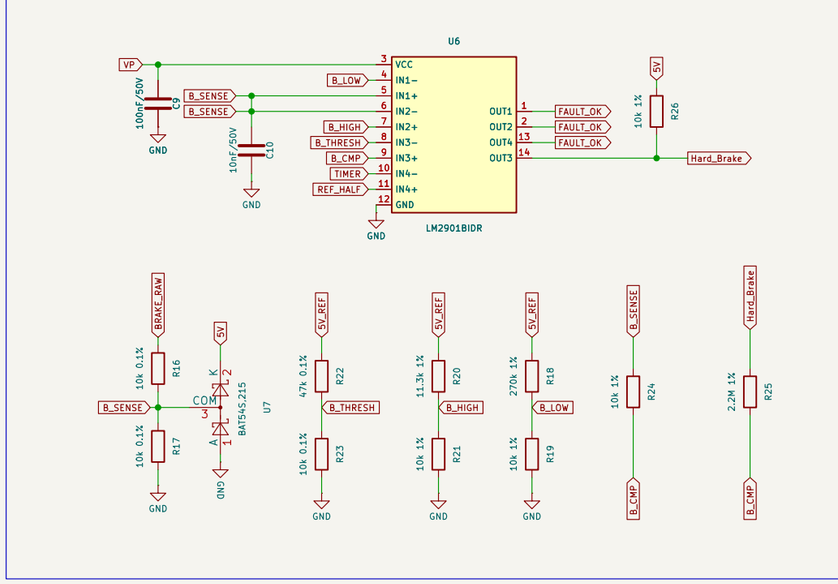


5. COINCIDENCE

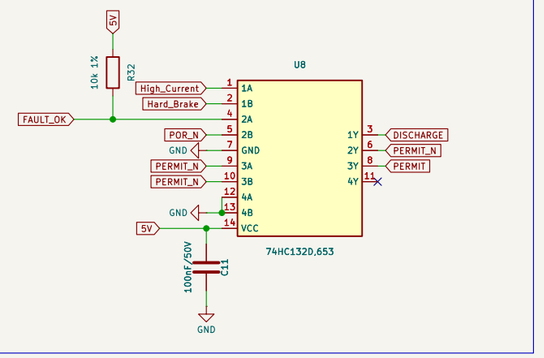

6. CONTINUOUS TIMING

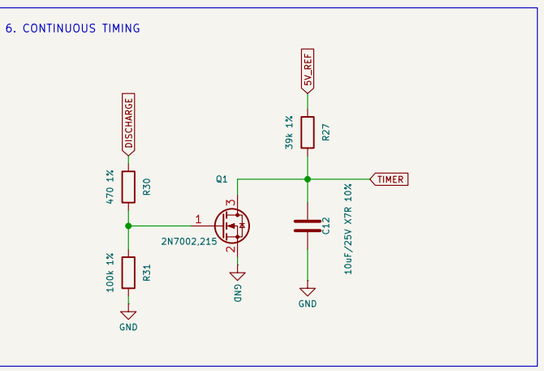

7. ACTIVE-HIGH OUTPUT

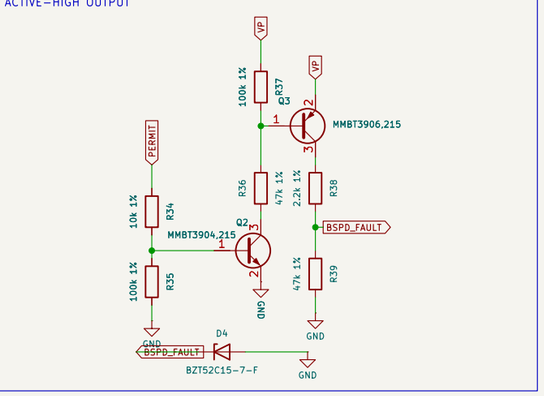

FAULT_OK is wired-AND: sensor faults and undervoltage directly remove permit; only brake+current coincidence is delayed.

PERMIT = FAULT_OK AND POR_N. The signal recovers when faults clear. Fault retention and manual reset belong to the external relayboard.

DHAB S/134 channel 2: ideal 5kW @360V =13.8889A; nominal Vout=2.63889V @5.000V.

AiM X05PSA02000P18: 0–2000psi / 0.5–4.5V; supply 8–16V. Brake trip ~1.76V raw; bench calibration pending.

Sheet: /	
File: BSPD_2027.kicad_sch	
Title: BSPD 2027 engineering review	
Size: A3	Date: 2026-11-04
KiCad E.D.A. 10.0.6	Id: 1/1