



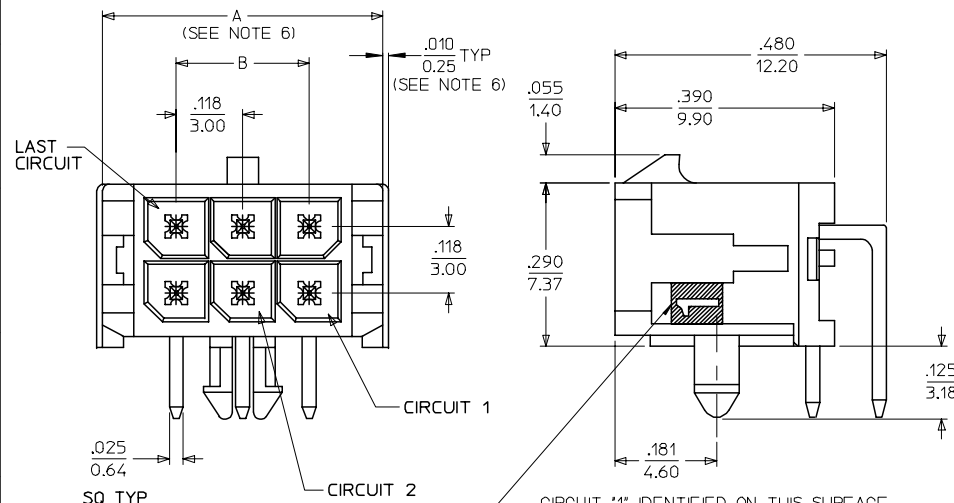


NOTES:

1. HOUSING MATERIAL: GLASS FILLED LIQUID CRYSTAL POLYMER,
UL94V-0, COLOR: BLACK
- TERMINAL MATERIAL: BRASS ALLOY
2. FINISH: A = .000100/(0.00254) MIN. TIN OVER
.000050/(0.00127) MIN. NICKEL PLATE.
- B = .000015/(0.00038) MIN. SELECT GOLD IN CONTACT AREA;
.000100/(0.00254) MIN. SELECT MATTE TIN ON SOLDER TAILS;
BOTH OVER .000050/(0.00127) MIN. NICKEL PLATE.
- C = .000030/(0.00076) MIN. SELECT GOLD IN CONTACT AREA;
.000100/(0.00254) MIN. SELECT MATTE TIN ON SOLDER TAILS;
BOTH OVER .000050/(0.00127) MIN. NICKEL PLATE.
- * THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO
RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC,"
CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN/LEAD
IN THE PC TAIL AREA.
3. PRODUCT SPECIFICATION: PS-43045
4. TRAY PACKAGED : SEE MOLEX DRAWING PK-70873-0313
5. MATES WITH MICRO FIT (3.0) RECEPTACLE SERIES 43025
6. PARTS MANUFACTURED AFTER 2007/02/28 MAY HAVE ADDITIONAL .010/0.25
OFFSETS AS INDICATED. THE PRIMARY SHIPPING CARTON LABEL WILL CONTAIN
A GREEN DOT TO IDENTIFY THESE PARTS.

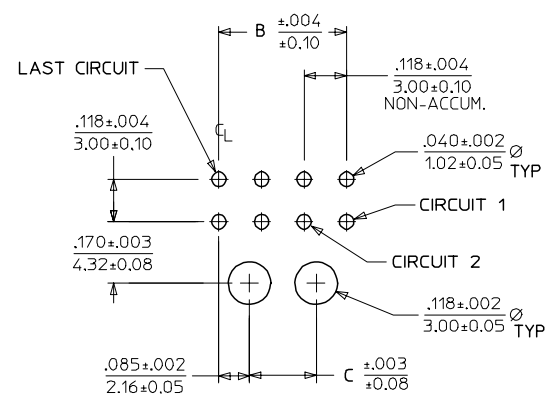

PCB LAYOUT: COMPONENT SIDE
RECOMMEND PCB THICKNESS: .062/1.57

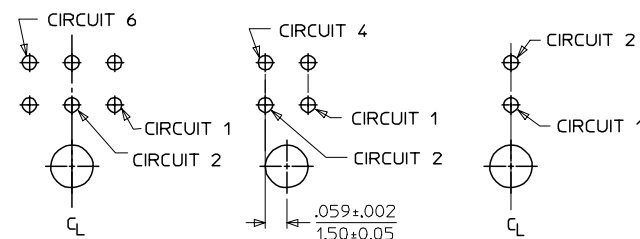

PCB LAYOUT:
6 CKT HEADER

PCB LAYOUT:
4 CKT HEADER

PCB LAYOUT:
2 CKT HEADER

	FINISH A	FINISH B	FINISH C
CKTS	MATERIAL NO:	MATERIAL NO:	MATERIAL NO:
02	43045-0200	43045-0201	43045-0202
04	43045-0400	43045-0401	43045-0402
06	43045-0600	43045-0601	43045-0602
08	43045-0800	43045-0801	43045-0802
10	43045-1000	43045-1001	43045-1002
12	43045-1200	43045-1201	43045-1202
14	43045-1400	43045-1401	43045-1402
16	43045-1600	43045-1601	43045-1602
18	43045-1800	43045-1801	43045-1802
20	43045-2000	43045-2001	43045-2002
22	43045-2200	43045-2201	43045-2202
24	43045-2400	43045-2401	43045-2402

CKTS	A (SEE NOTE 6)	B	C
02	<u>.262</u> 6.65	NA	NA
04	<u>.380</u> 9.65	<u>.118</u> 3.00	NA
06	<u>.498</u> 12.65	<u>.236</u> 6.00	NA
08	<u>.616</u> 15.65	<u>.354</u> 9.00	<u>.185</u> 4.70
10	<u>.734</u> 18.65	<u>.472</u> 12.00	<u>.303</u> 7.70
12	<u>.852</u> 21.65	<u>.591</u> 15.00	<u>.421</u> 10.70
14	<u>.970</u> 24.65	<u>.709</u> 18.00	<u>.539</u> 13.70
16	<u>1.088</u> 27.65	<u>.827</u> 21.00	<u>.657</u> 16.70
18	<u>1.206</u> 30.65	<u>.945</u> 24.00	<u>.776</u> 19.70
20	<u>1.325</u> 33.65	<u>1.063</u> 27.00	<u>.894</u> 22.70
22	<u>1.443</u> 36.65	<u>1.181</u> 30.00	<u>1.012</u> 25.70
24	<u>1.561</u> 39.65	<u>1.299</u> 33.00	<u>1.130</u> 28.70

ADD OFFSET/NOTE 6 EC NO: UCP2007-1883 DRAWN/KIPPER 2007/03/01 CHK'D/SSOUSEK 2007/03/05 APPR'F/SM TH 2007/03/05	DESCRIPTION	QUALITY SYMBOLS ▼=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
			mm	INCH	DRAWN BY	DATE	TITLE MICRO-FIT (3.0) DUAL ROW RIGHT ANGLE THRU HOLE HEADER ASS'Y MOLEX INCORPORATED				
			4 PLACES ± --- ± ---	SAMIEC	2000/03/15						
			3 PLACES ± --- ± .010	CHECKED BY	DATE						
			2 PLACES ± 0.25 ± .014	MUELLER	2000/03/15	MOLEX					
1 PLACE ± 0.36 ± ---	APPROVED BY	DATE									
			ANGULAR ±1/2°		EDGLEY	2000/03/15					
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
					SEE CHART		SD-43045-001		1 OF 1		
					SIZE (C)		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				