


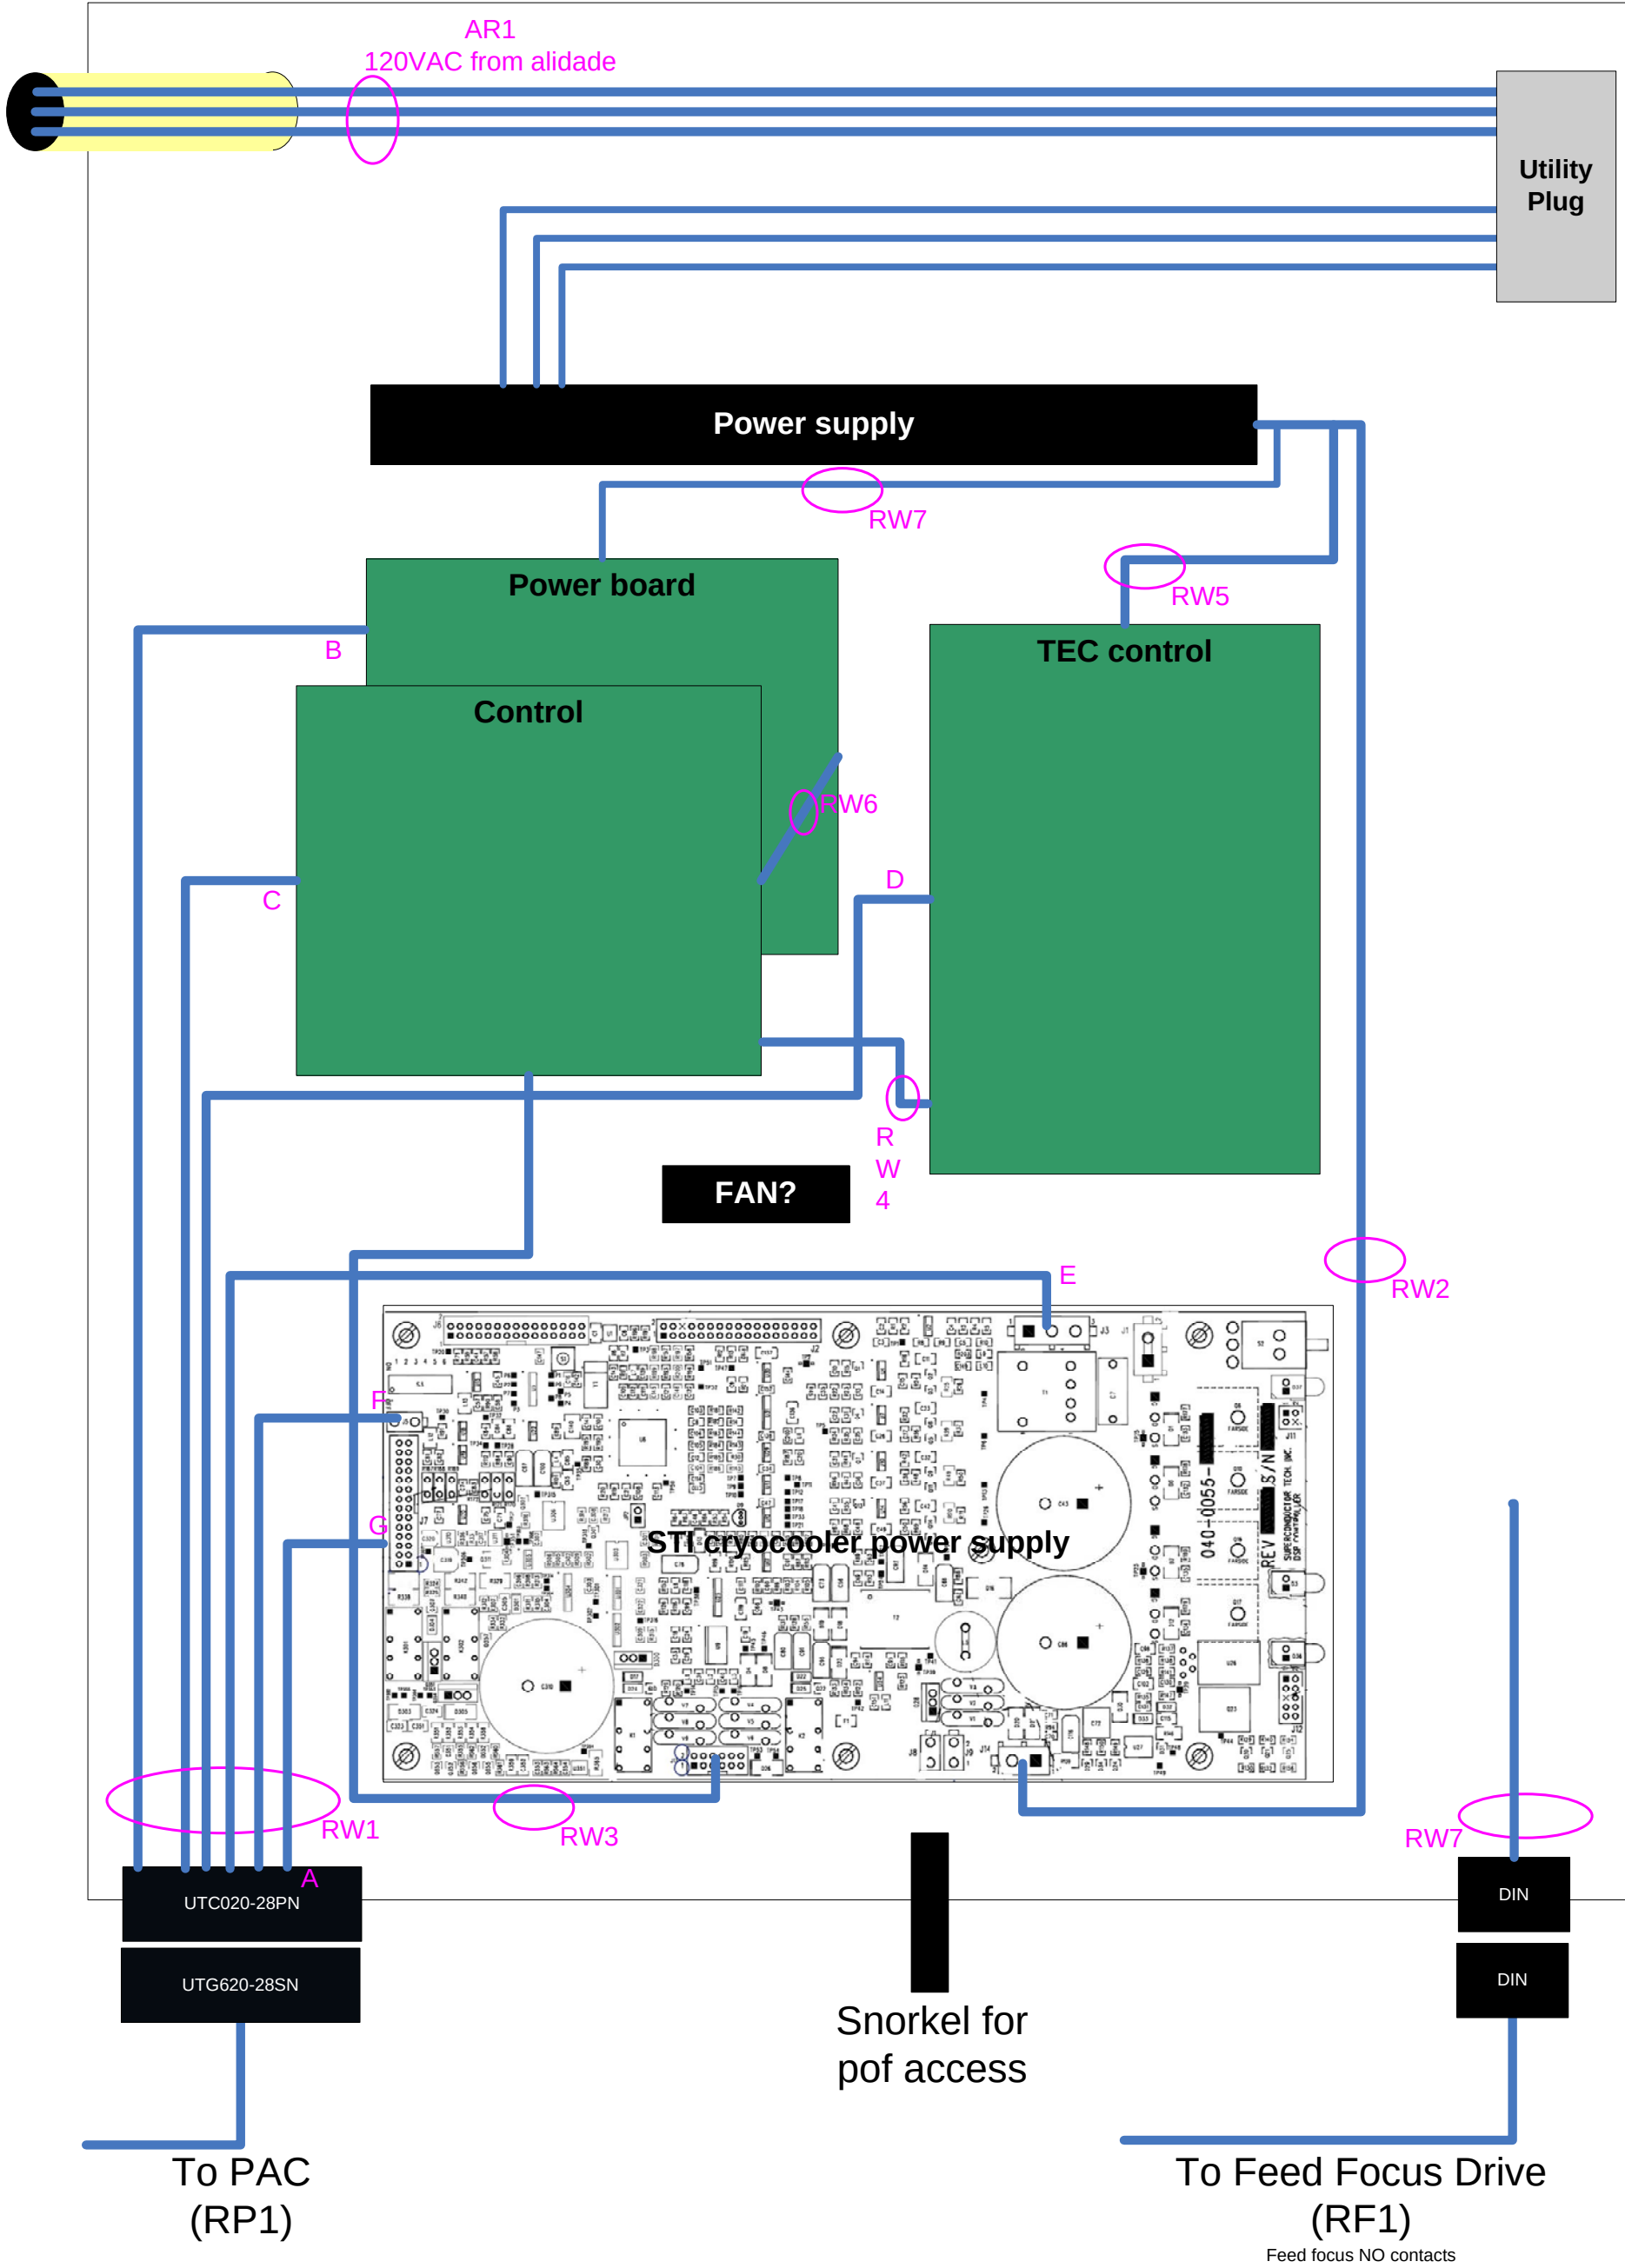

Rim Wiring Schedule							
Reference: alidadeWireHarness.xls							
Reference: datasheet-PAX.doc							
Reference: frontendWiring.xls							
5/1/2006							
RP1	Cable from Rim box to PAC (PAX Case)			Belden 8170 (S) - Belden 1037A (P)			
A,B	Description		Size	Color	Twist	Length	Comment
A	TEC power		#16	P-B1	Z	54"	
B	TEC power		#16	P-W1	Z		
C	Shield		#18	P-S1	-		
D	dewar diode 1		#24	S-BF-Red	Y		
E	dewar diode 2		#24	S-BF-Blu	Y		
F	SPARE		#16	P-B3	X		
G	SPARE		#16	P-W3	X		
H	SPARE		#24	S-BF-Br	W		
J	SPARE		#24	S-BF-Blk	W		
K	compressor power		#16	P-B2	V		
L	compressor power		#16	P-W2	V		
M	Shield		#18	P-S2	-		
N	cryocooler therm 2		#24	S-BF-Red	U		
--	cryocooler therm 1		#24	S-BF-Gr	U		
R	-5V		#24	S-GF-Blu	T		
S	GND		#24	S-GF-Blk	T		
T	PAXTEC therm 1		#24	S-BF-Red	S		
U	PAXTEC therm 2		#24	S-BF-Wh	S		
V	GNDsense		#24	S-RF-Blk	R		
W	+6sense		#24	S-RF-Gr	R		
X	+5sense		#24	S-GF-Wh	Q		
Y	-5sense		#24	S-GF-Blk	Q		
Z	+5V		#24	S-RF-Red	P		
a	GND		#24	S-RF-Blk	P		
b	GND		#24	S-BF-Blk	O		
c	+6V		#24	S-BF-Y	O		
d	GND		#24	S-BF-Blk	M		
e	+5V		#24	S-BF-Or	M		
A	UTG620-28SN	#16/#18 get RM16M23D28 pins			UTG20ACN housing		
B	UTG620-28SN	#24 get SM24ML1D70 pins					

RW1 Cable inside rim box from bottom connector to components for RP1							
A	Description	B,C,D,E,F,G	Size	Color	Twist	Length	Comment
A	TEC power		#16				
B	TEC power		#16				
C	Shield		#18				
D	dewar diode 1		#24				
E	dewar diode 2		#24				
F	SPARE		#16				
G	SPARE		#16				
H	SPARE		#24				
J	SPARE		#24				
K	compressor power		#16				
L	compressor power		#16				
M	Shield		#18				
N	cryocooler therm 2		#24				
--	cryocooler therm 1		#24				
R	-5V		#24				
S	GND		#24				
T	PAXTEC therm 1		#24				
U	PAXTEC therm 2		#24				
V	GND		#24				
W	+6sense		#24				
X	+5sense		#24				
Y	-5sense		#24				
Z	+5V		#24				
a	GND		#24				
b	GND		#24				
c	+6V		#24				
d	GND		#24				
e	+5V		#24				
A	UTC020-28P	#16/#18 get RC16M23D28, #24 get SC24ML1D70 sockets					
B							
C							
D							
E							
F							
G							
RW2 24V from power supply to STI supply							
A, B	Description		Size	Color	Twist	Length	Comment
1							
2							
A	Tyco 1-480698(newark 46F2063) with 2 contacts Tyco 350550-2(Newark 90F5656)						
B	Tyco 1-480698(newark 46F2063) with 2 contacts Tyco 350550-2(Newark 90F5656)						

RW3 serial from STI to ucnlr							
A,B	Description		Size	Color	Twist	Length	Comment
1							
2							
3							
A							
B							
RW4 from TEC to ucnlr							
A	Description	B	Size	Color	Twist	Length	Comment
A							
B							
RW5 24V from power supply to TEC board							
A	Description	B	Size	Color	Twist	Length	
RW6 connection from power mgmt board to control board							
A	Description	B	Size	Color	Twist	Length	
RW7 connection from power mgmt board to control board							
A	Description	B	Size	Color	Twist	Length	
1							
2							
3							
4							
5							
RF1 Cable from rim to feed focus drive Belden 9943							
A	Description	B	Size	Color	Twist	Length	
1	Motor		#22	red		58"	
2	Motor			white			
3	Motor			black			
4	Extend stop			orange			
5	Common			brown			
6	retract stop			blue			
7	ground			green			
A		Rim box end	13/16" strip back on connector			3/8" strip on shield	
B		Terminal end	5" strip back on jacket/shield			green #6 spade	

++++RimWiring++++

