

TASK 3 – CREATE VPC NETWORK AND SUBNETS AND CONNECT USING LINUX

1. Create a VPC with the IP address

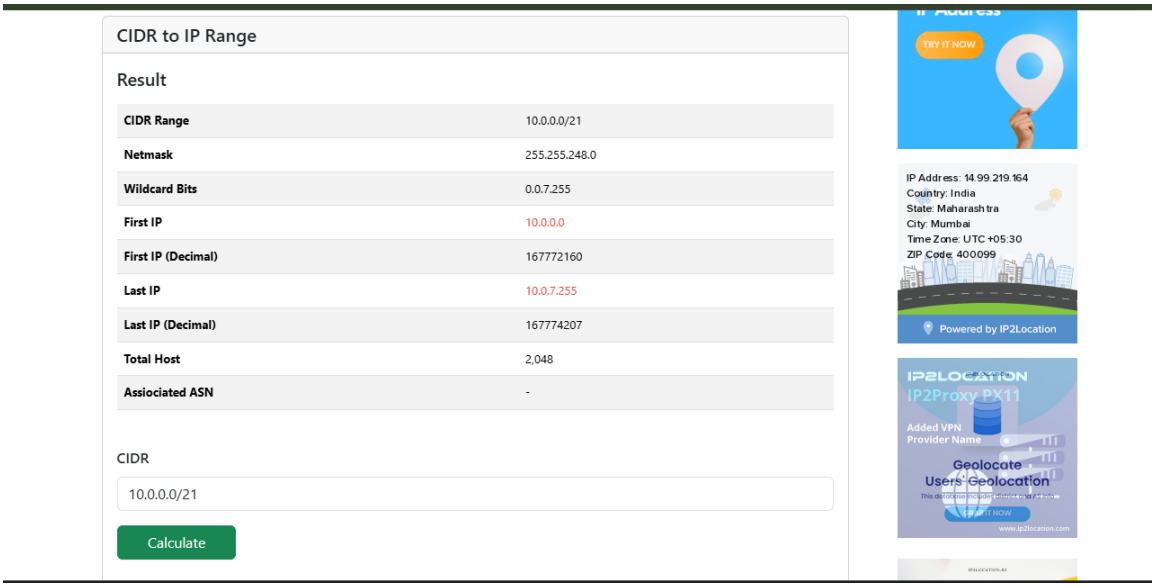

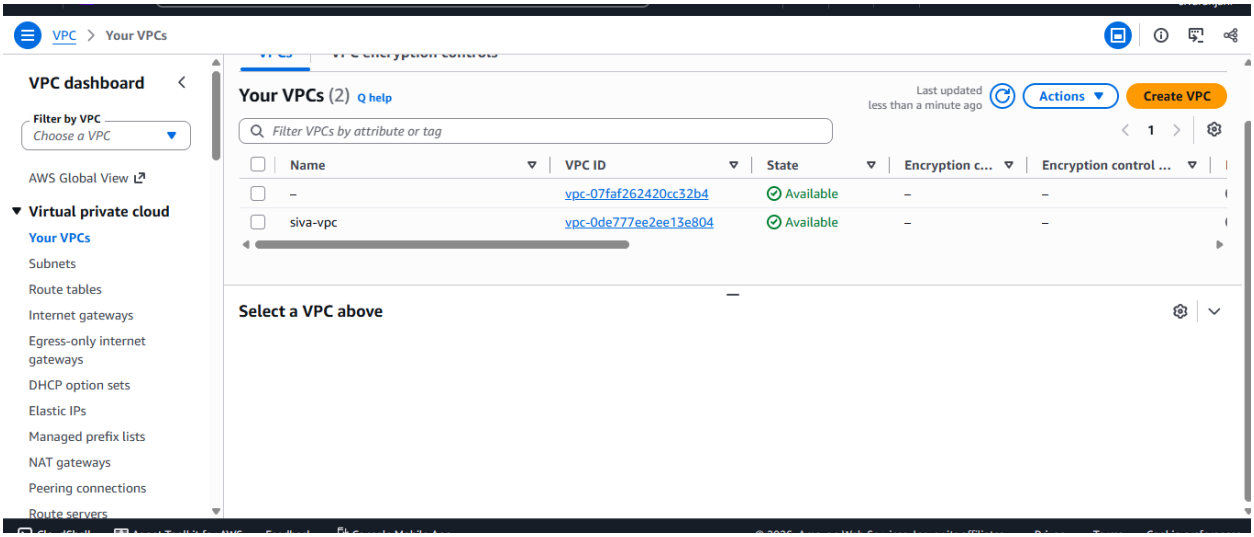


2. Create a public and private subnet


TASK 3 – CREATE VPC NETWORK AND SUBNETS AND CONNECT USING LINUX


Public subnet – 10.0.0.0/22 (10.0.0.0/22 - 10.0.3.255/22)

Private subnet – 10.0.4.0/23(10.0.4.0/23- 10.0.5.255/23)

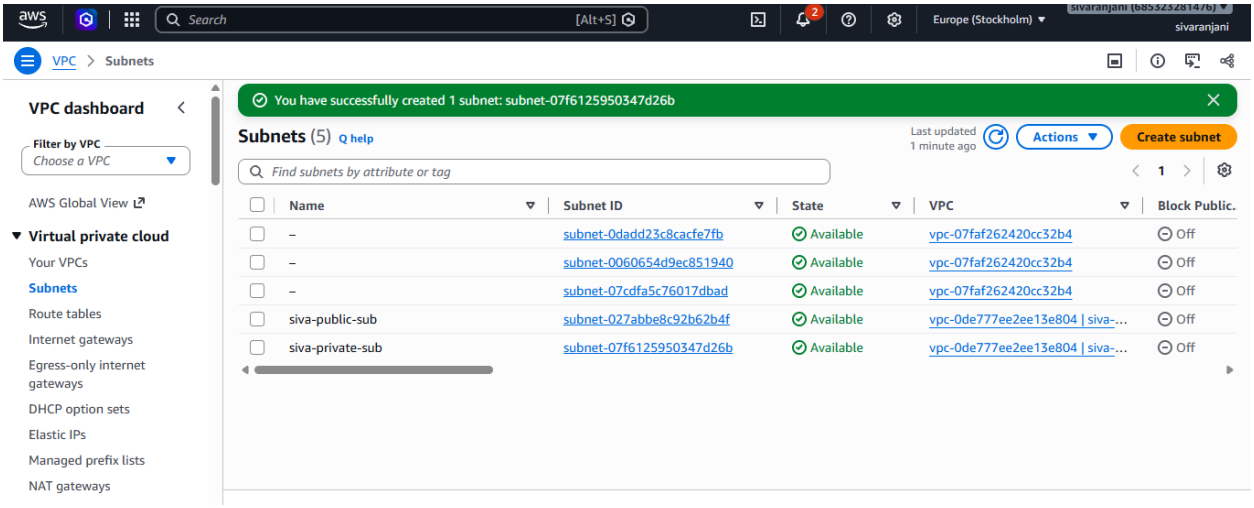


TASK 3 – CREATE VPC NETWORK AND SUBNETS AND CONNECT USING LINUX

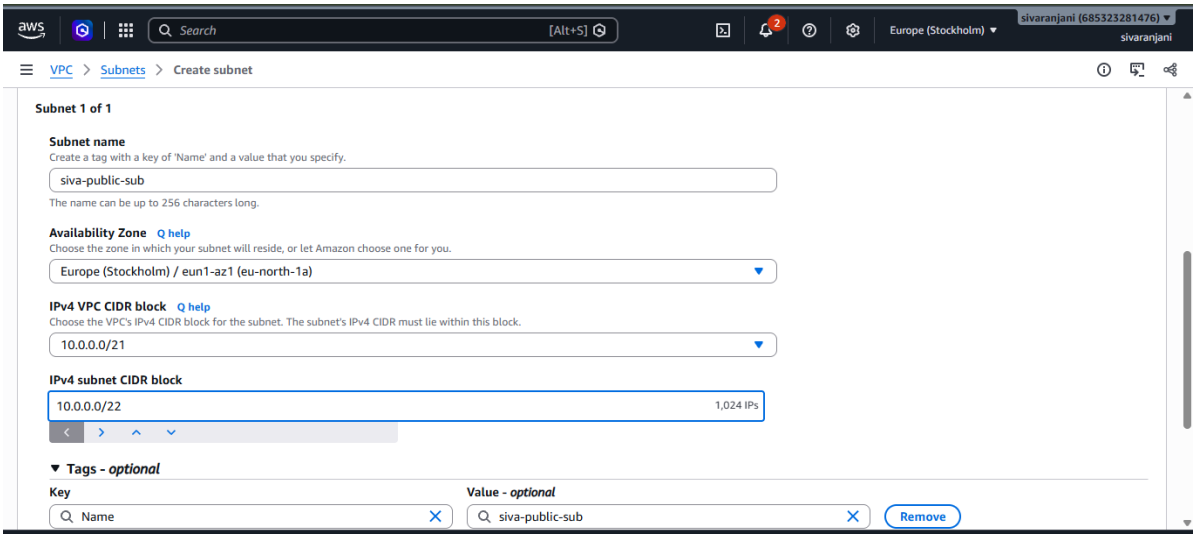

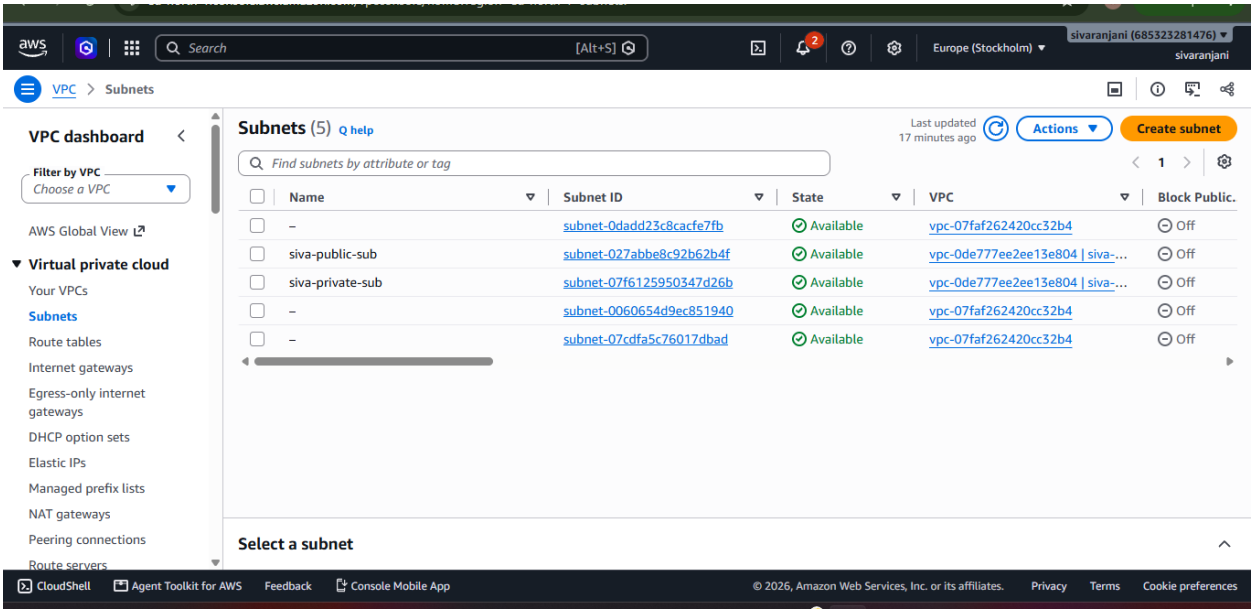


3. Create a Internet gateway and attach VPC

TASK 3 – CREATE VPC NETWORK AND SUBNETS AND CONNECT USING LINUX

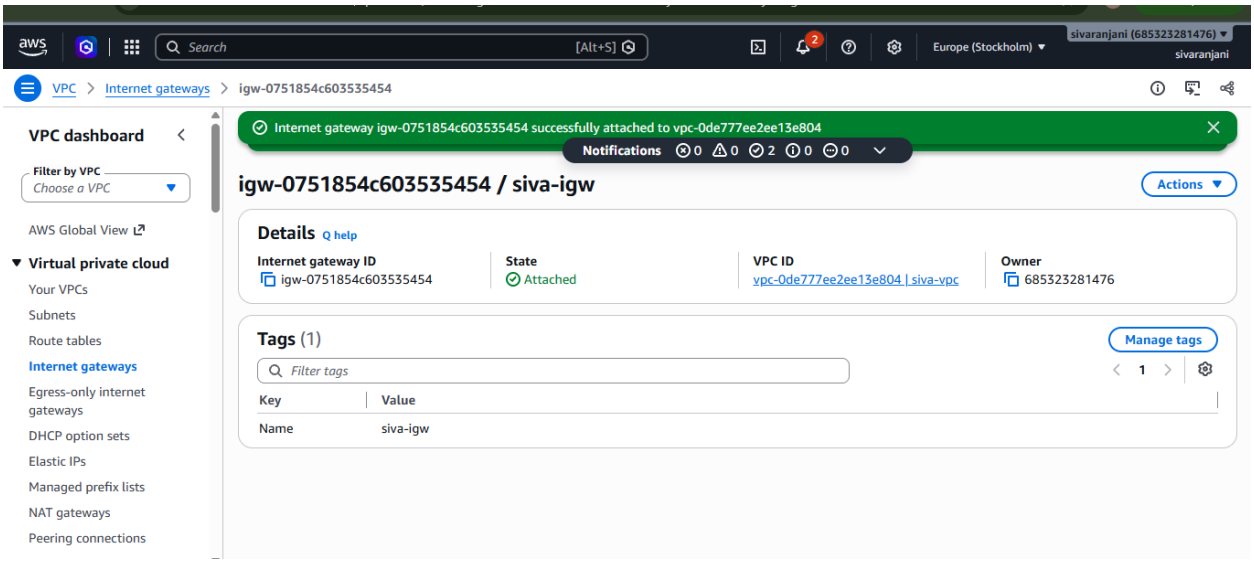


4. Create two route tables public and private subnets

Public route table

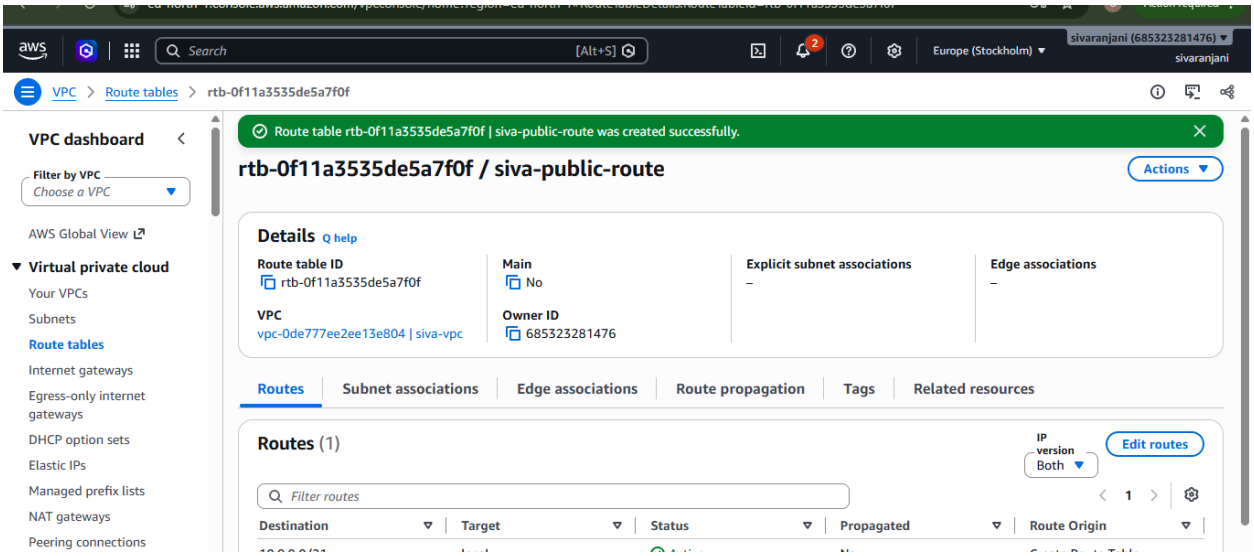


Attach internet gateway

TASK 3 – CREATE VPC NETWORK AND SUBNETS AND CONNECT USING LINUX

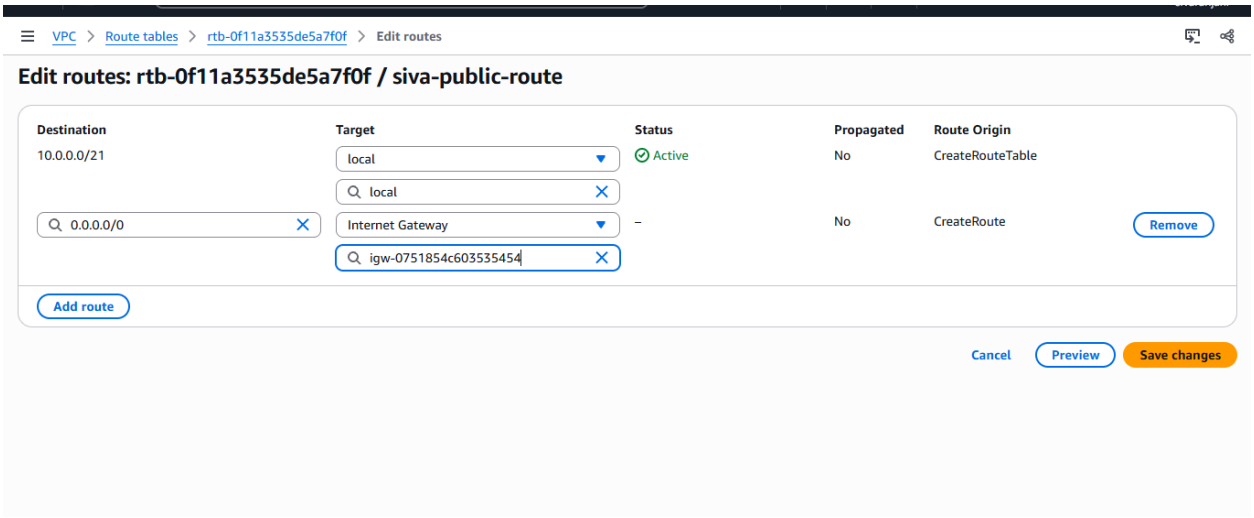


Attached the public subnet to router

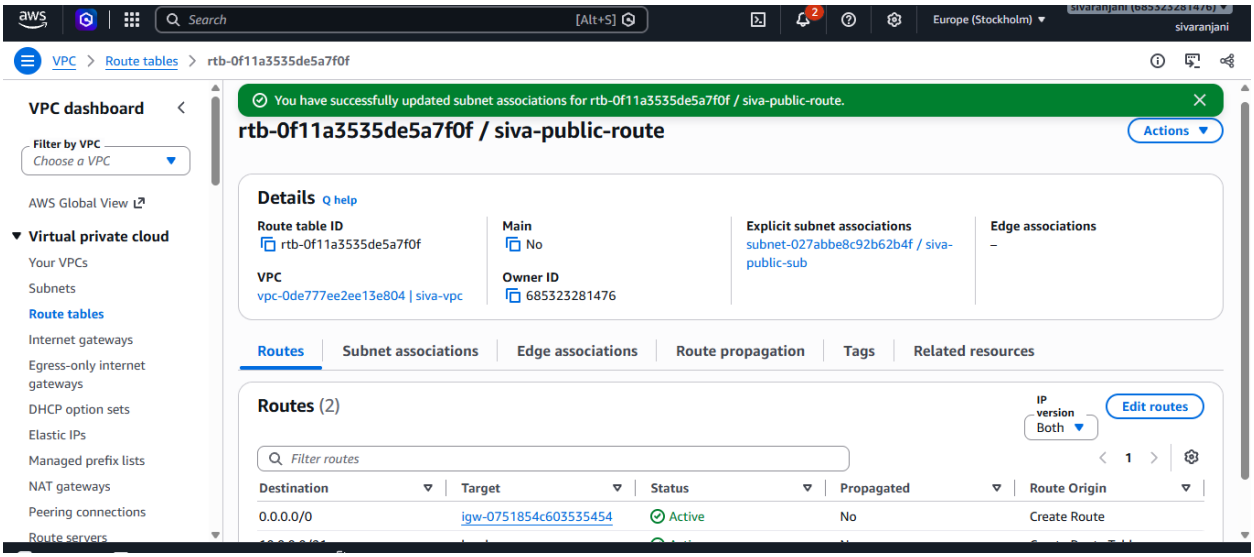


Before private subnet – nat gateway has to be created

TASK 3 – CREATE VPC NETWORK AND SUBNETS AND CONNECT USING LINUX

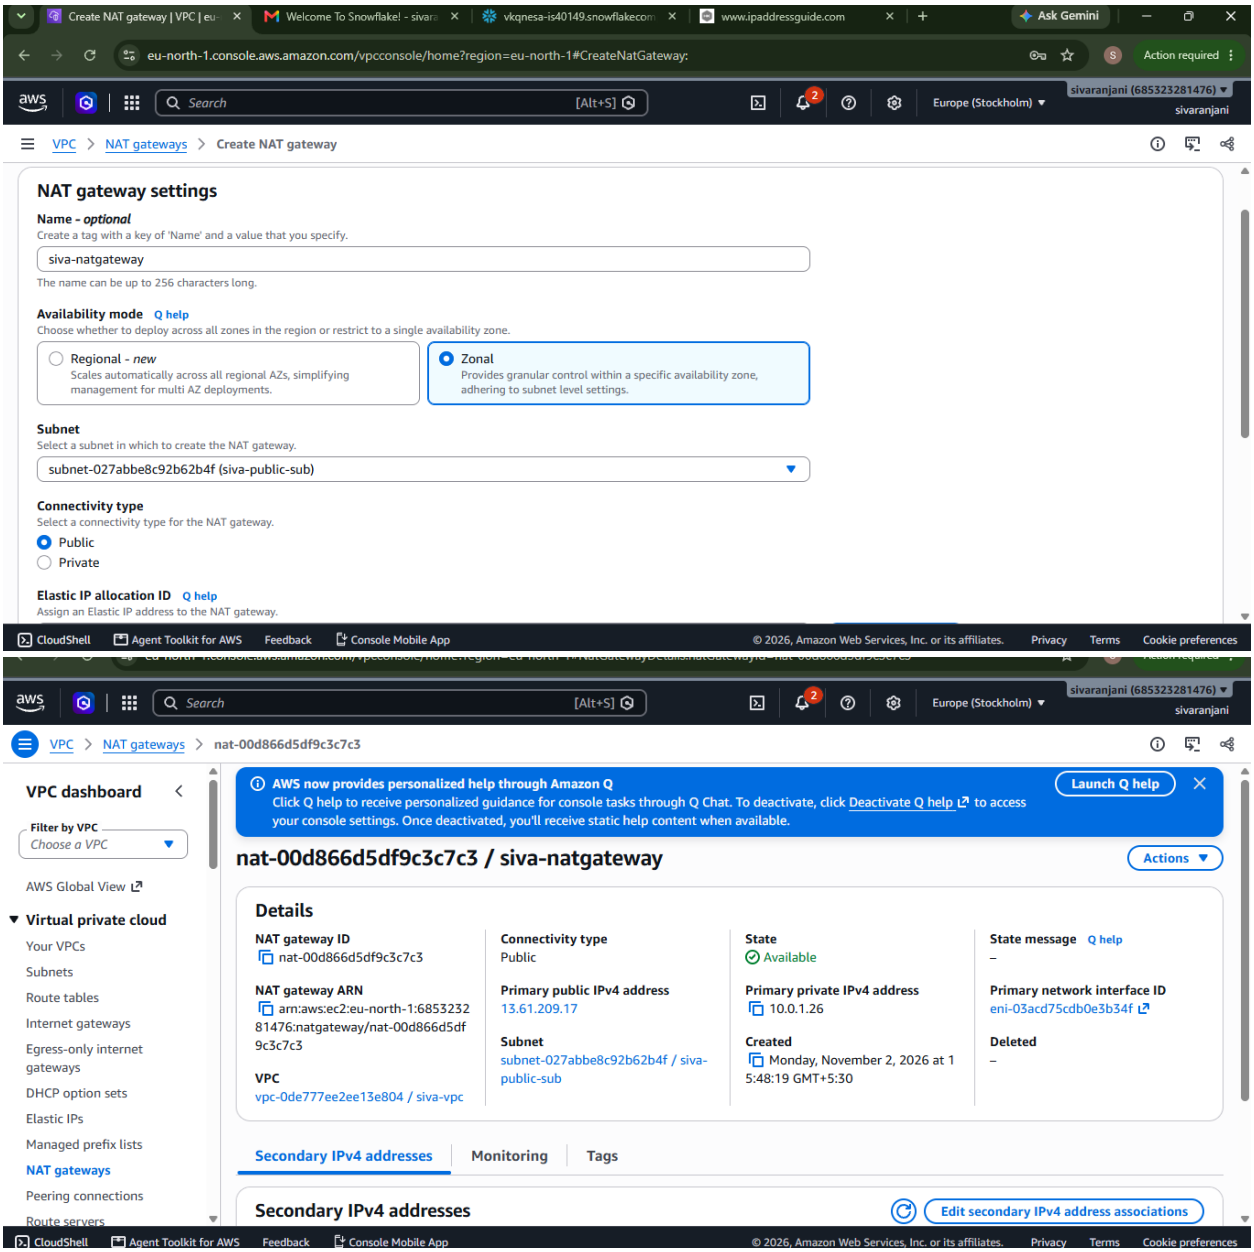


Natgateway attached to private route

TASK 3 – CREATE VPC NETWORK AND SUBNETS AND CONNECT USING LINUX

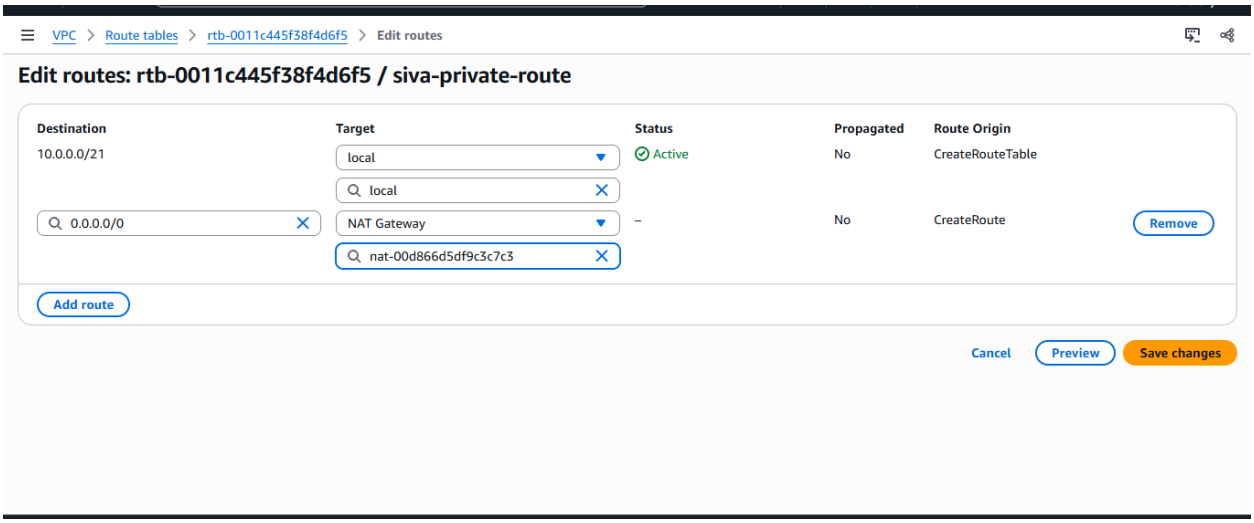


Elastic ip allocated for our natgateway

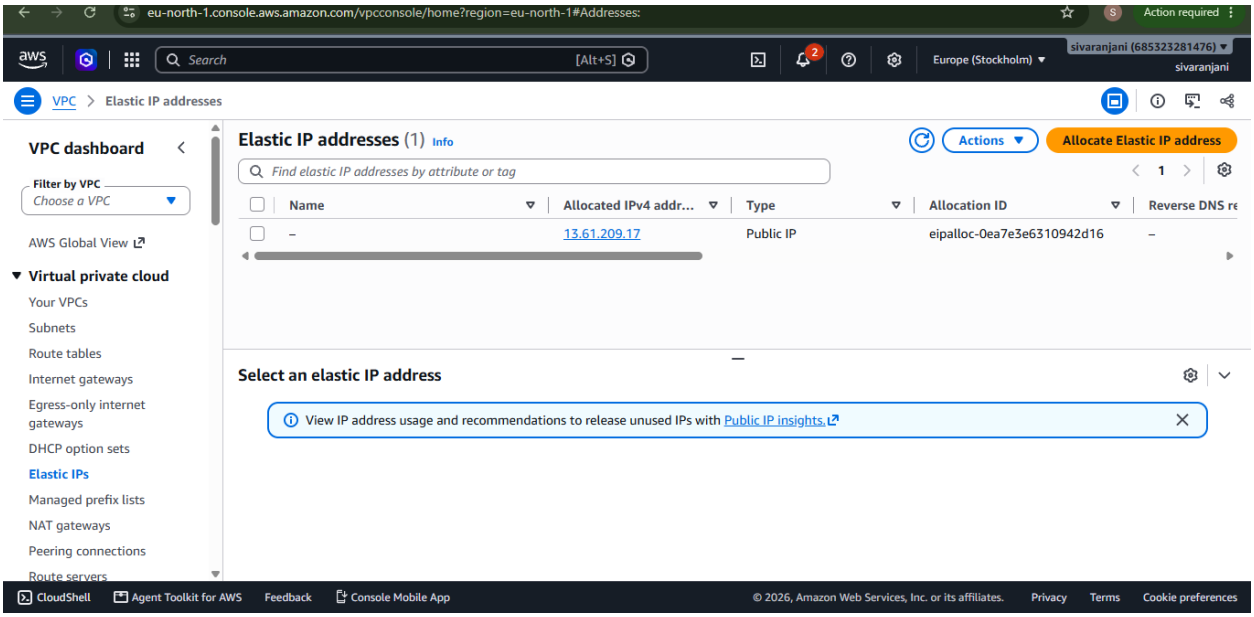

5. Security group creation


   For public sg – open ssh, http, https


TASK 3 – CREATE VPC NETWORK AND SUBNETS AND CONNECT USING LINUX

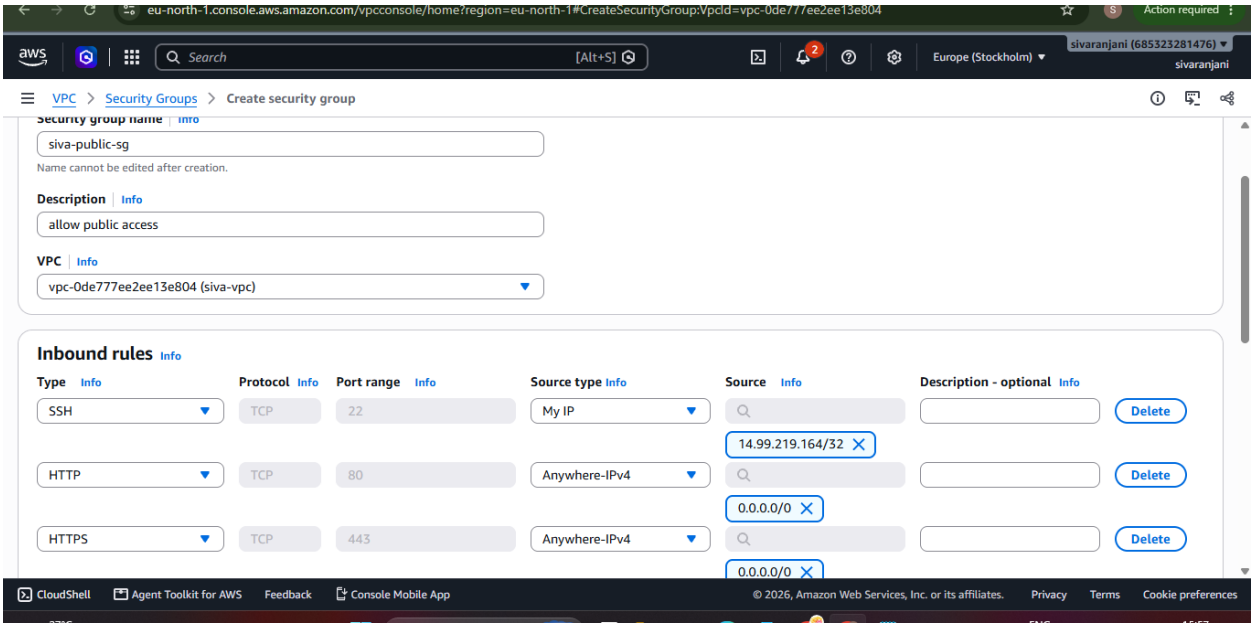

For private security group, give source as the public sg

TASK 3 – CREATE VPC NETWORK AND SUBNETS AND CONNECT USING LINUX

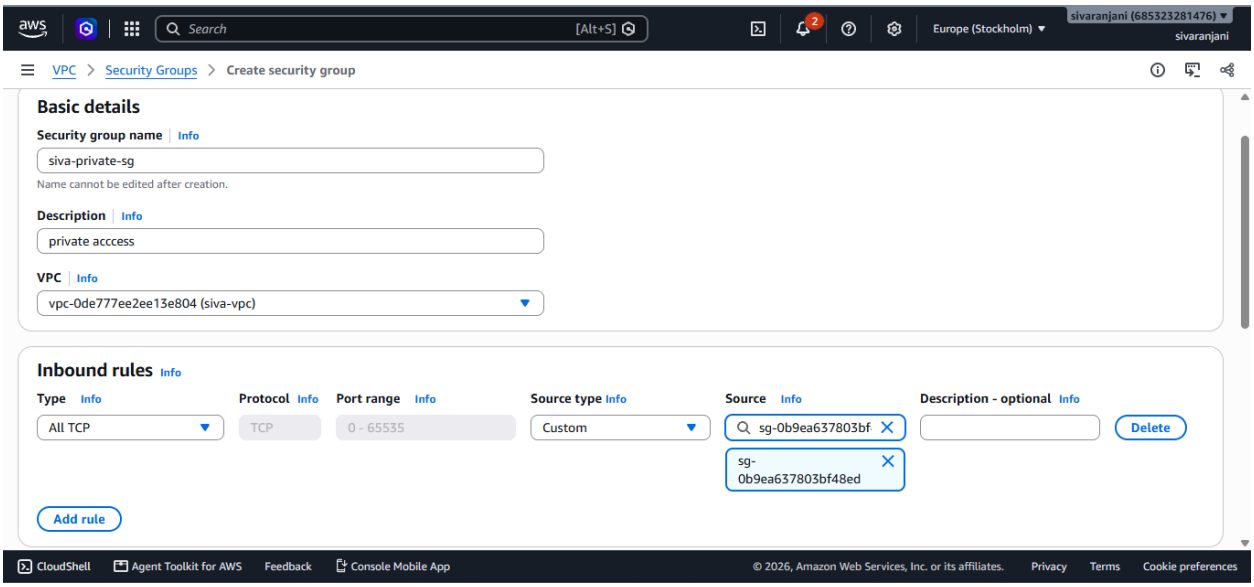

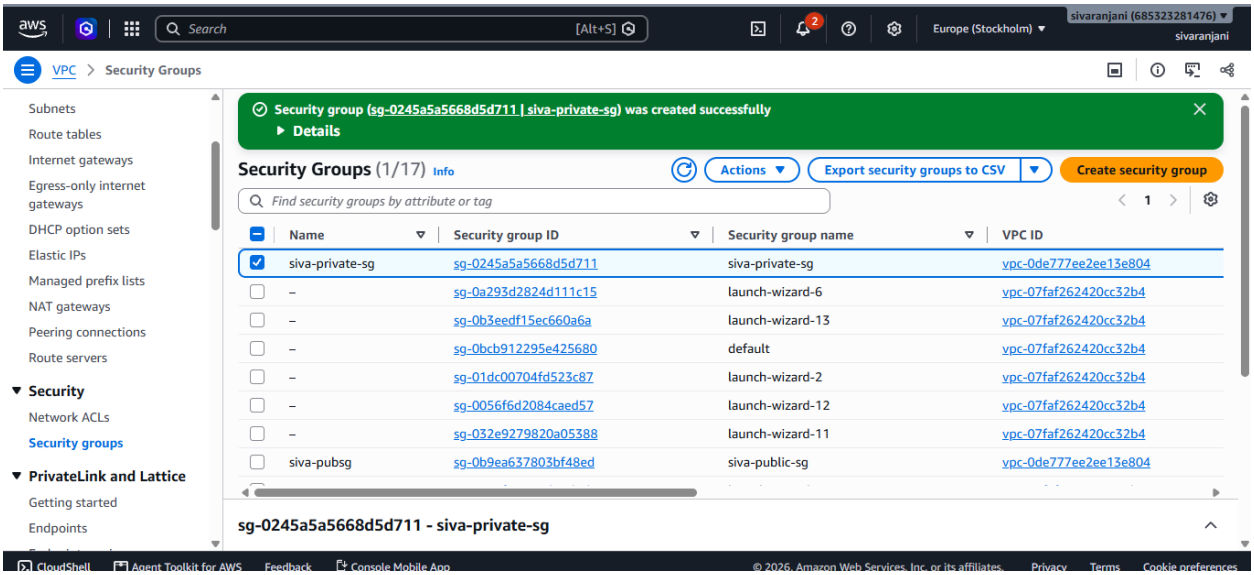


6. Create servers


   Home page and login page

   Public – Home page


TASK 3 – CREATE VPC NETWORK AND SUBNETS AND CONNECT USING LINUX

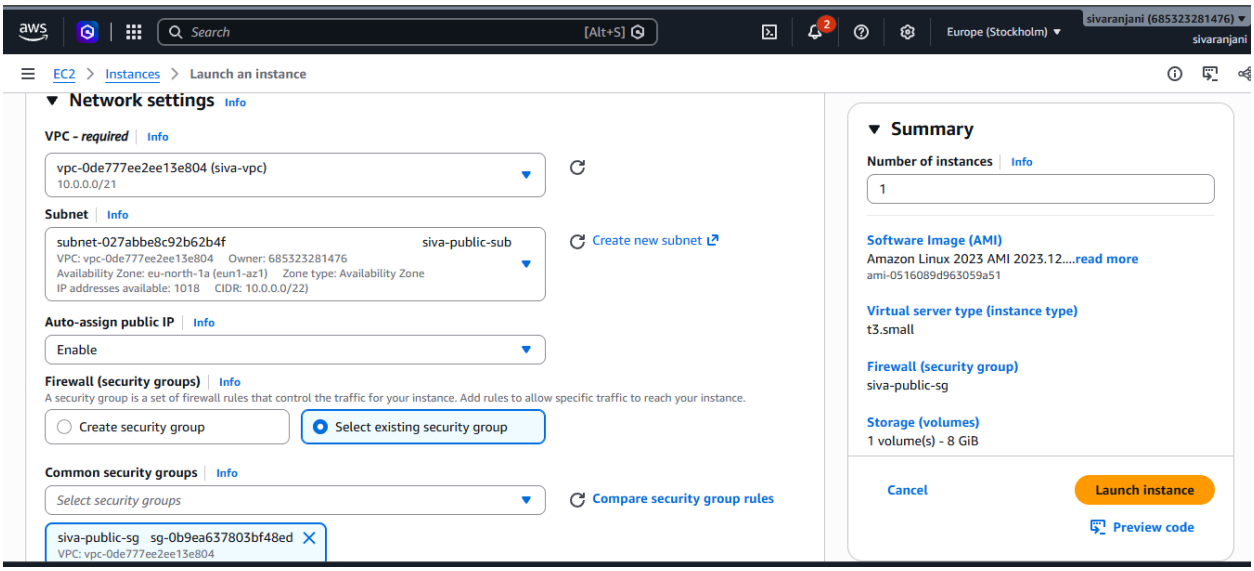


Private – Login Page

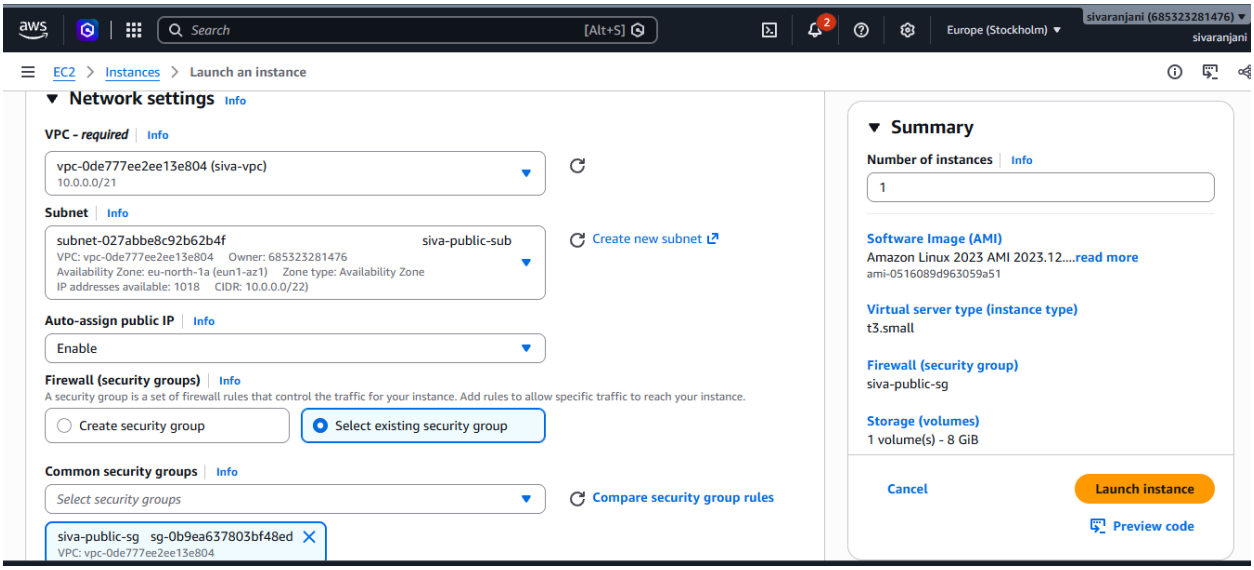

TASK 3 – CREATE VPC NETWORK AND SUBNETS AND CONNECT USING LINUX

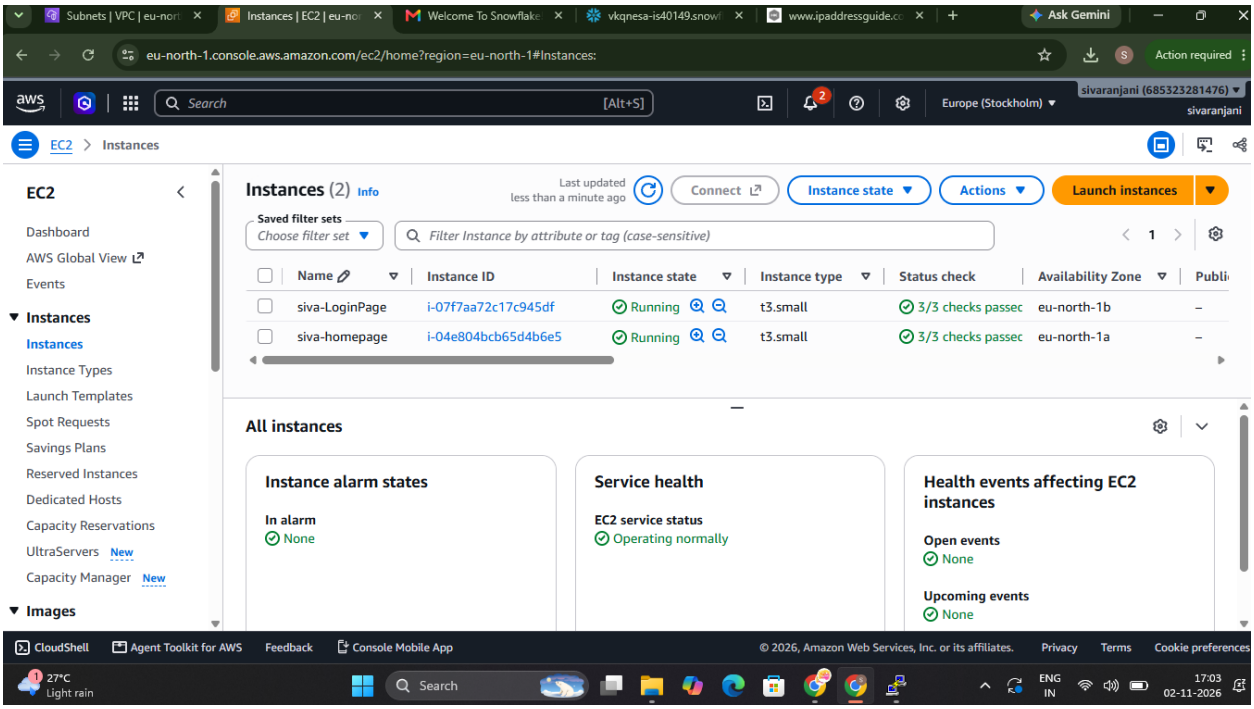


Logging to homapage instance with public IP

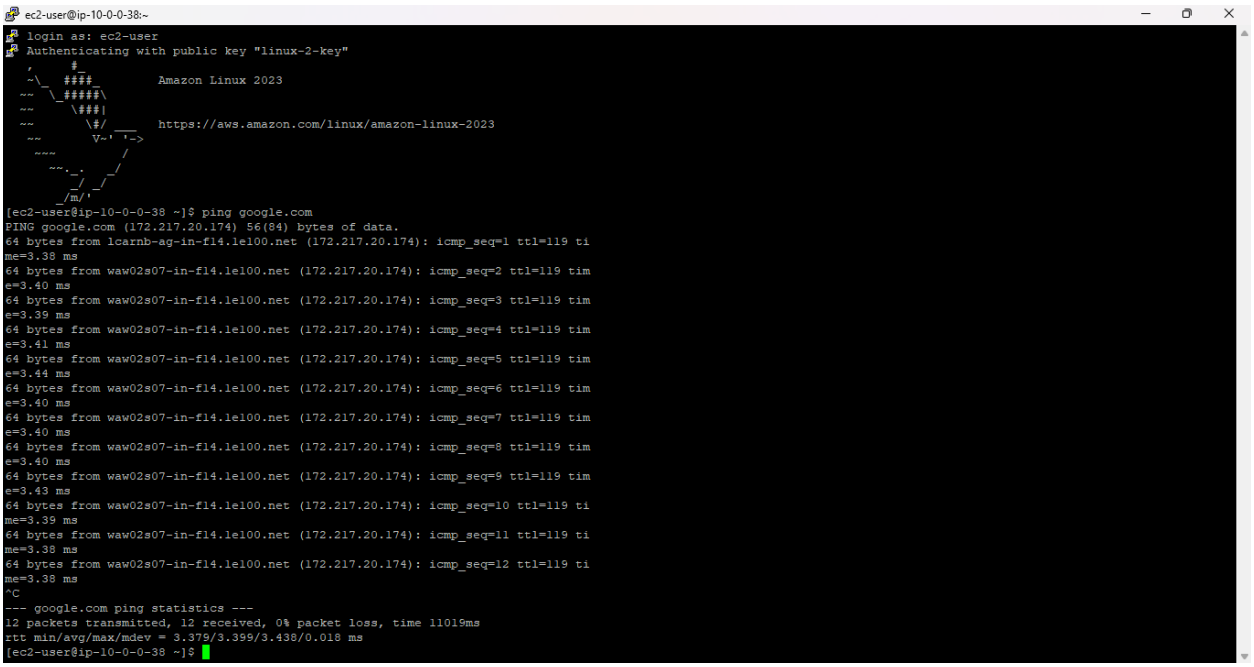

The private instance login page has no public IP

TASK 3 – CREATE VPC NETWORK AND SUBNETS AND CONNECT USING LINUX

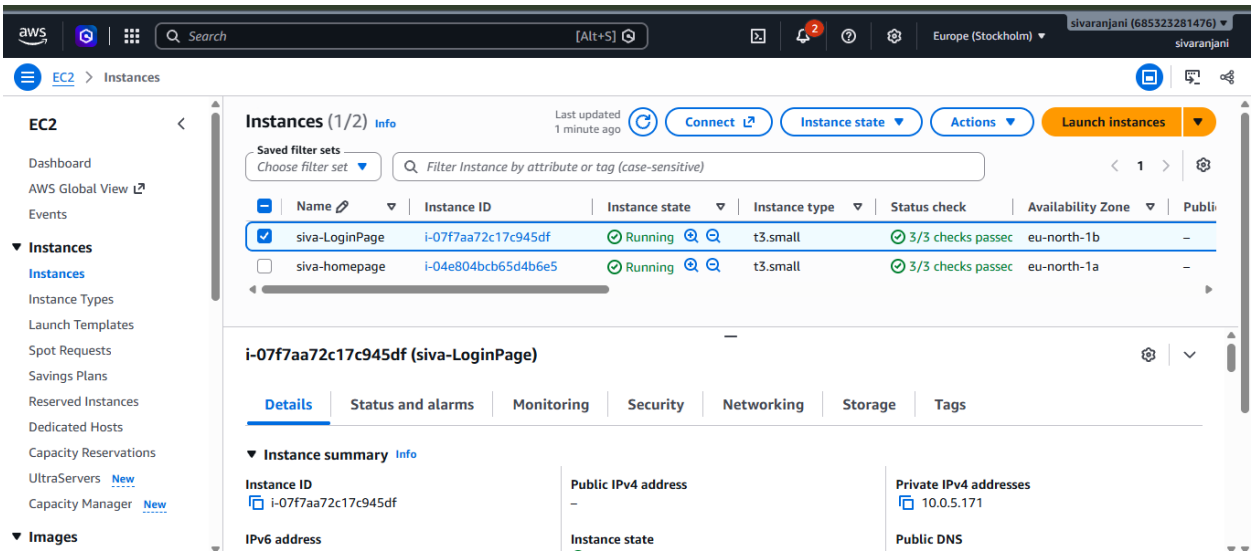

We can’t connect to the putty as we connected

Pinging the login page private ip in the home page

```
me=3.38 ms
^C
--- google.com ping statistics ---
12 packets transmitted, 12 received, 0% packet loss, time 11019ms
rtt min/avg/max/mdev = 3.379/3.399/3.438/0.018 ms
[ec2-user@ip-10-0-0-38 ~]$ ping -c 4 10.0.5.171
PING 10.0.5.171 (10.0.5.171) 56(84) bytes of data.


--- 10.0.5.171 ping statistics ---
4 packets transmitted, 0 received, 100% packet loss, time 3112ms

[ec2-user@ip-10-0-0-38 ~]$
[ec2-user@ip-10-0-0-38 ~]$
```

It connects

Logging to the login page instance with private ip

```
[ec2-user@ip-10-0-0-38 ~]$
[ec2-user@ip-10-0-0-38 ~]$ ssh ec2-user@10.0.5.171
The authenticity of host '10.0.5.171 (10.0.5.171)' can't be established.
ED25519 key fingerprint is SHA256:M3klZVIZnec+BDa/ogKWvjFsG9vHGiCv9r1Bm2v+Jkc.
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '10.0.5.171' (ED25519) to the list of known hosts.
ec2-user@10.0.5.171: Permission denied (publickey,gssapi-keyex,gssapi-with-mic).
```


Permmission denied error


We convert the key ppk to pem and transfer to home page

```
[ec2-user@ip-10-0-0-38 ~]$ mkdir -p ~/.ssh
chmod 700 ~/.ssh
chmod 400 ~/linux-2-key.pem
[ec2-user@ip-10-0-0-38 ~]$ ls
linux-2-key.pem
[ec2-user@ip-10-0-0-38 ~]$
```


Now connection established

TASK 3 – CREATE VPC NETWORK AND SUBNETS AND CONNECT USING LINUX

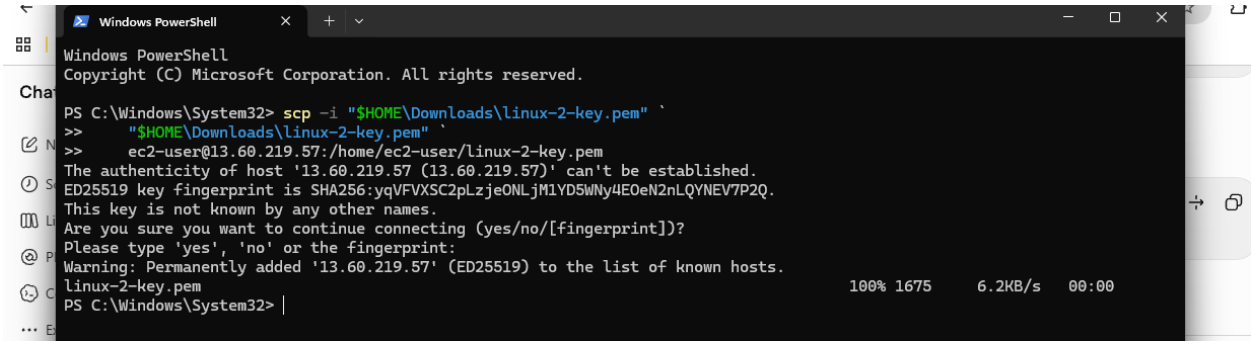


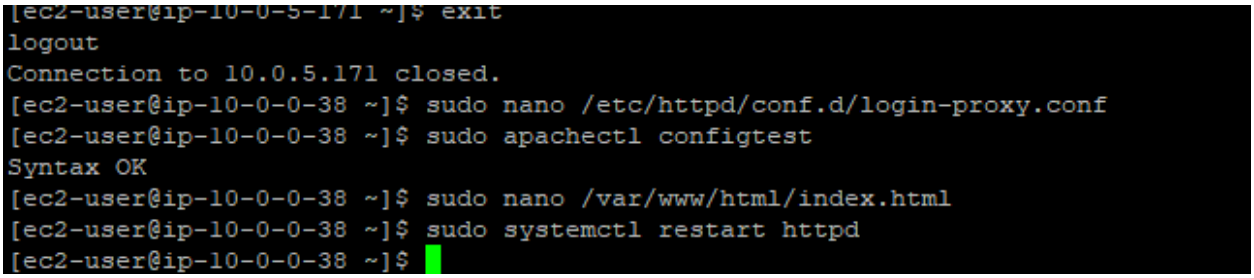

Changing the config test

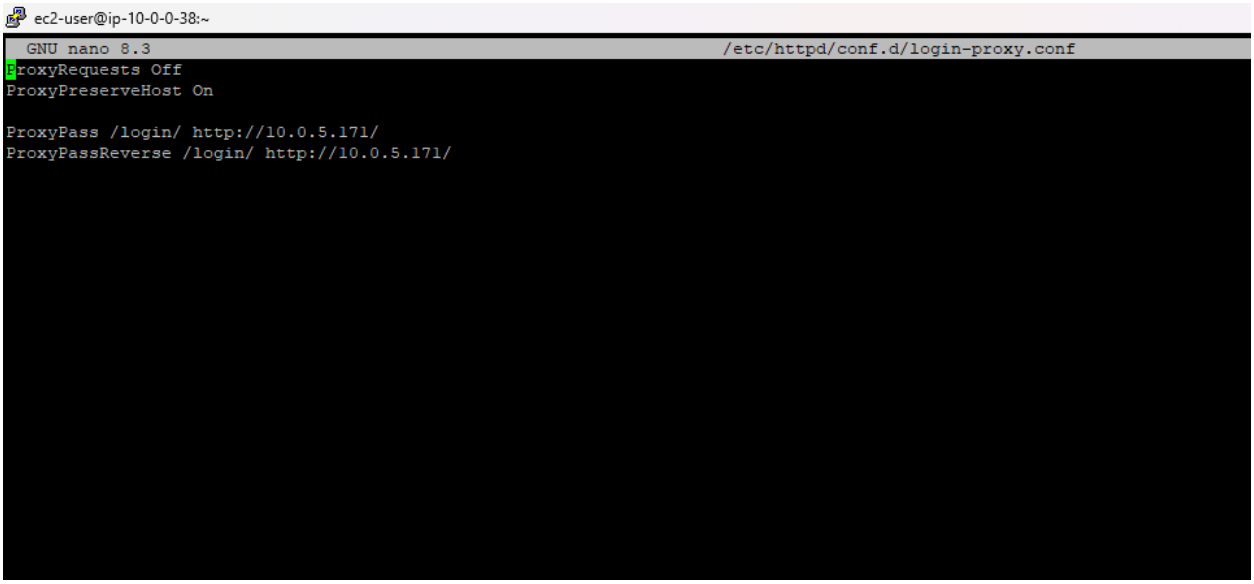

TASK 3 – CREATE VPC NETWORK AND SUBNETS AND CONNECT USING LINUX

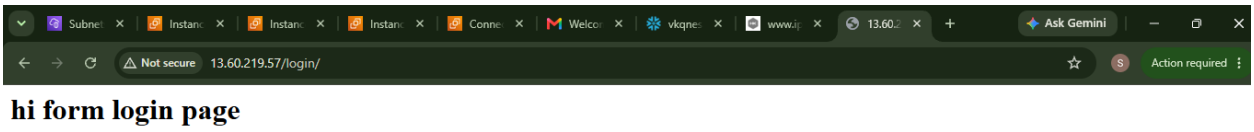

hi form login page