PCB MANUFACTURING SPECIFICATIONS
CABINET IOT

SPECIFICATIONS

NOTE #	NOTE
1	ALL SPECIFICATIONS REFERENCED ARE OF THE REVISION SPECIFIED IN THE TITLE BLOCK
2	SUPPLIER SHALL NOT MODIFY THE DESIGN OR APPROVED STACK-UP WITHOUT WRITTEN PERMISSION
3	ALL MATERIALS SHALL BE RoHS COMPLIANT AND FINAL PRODUCT SHALL BE ACCEPTABLE TO USE IN RoHS ASSEMBLY. RoHS LOGO SHALL BE MARKED IN SILKSCREEN INK BY THE SUPPLIER WHERE INDICATED BY THE TEXT "PLACE MARKINGS HERE"
4	COPPER FOIL: REFER TO LAYER STACK LEGEND FOR Cu THICKNESS DETAILS. ALL Cu THICKNESSES ARE FINISHED AND INCLUDE BASE FOIL PLUS Cu PLATING ON PLATED LAYERS
5	ELECTRICAL TEST: ALL PRINTED CIRCUITS SHALL BE 100% ELECTRICALLY TESTED FOR OPENS/SHORTS USING PROVIDED NETLIST. REJECTED PRINTED BOARDS MUST BE CLEARLY MARKED WITH NON-CONDUCTIVE, PERMANENT INK.
6	MARKINGS: VENDOR MARKING AND DATE/LOT CODES SHALL BE LOCATED ON THE BOARD IN THE RESERVED AREA AS SPECIFIED IN THE GERBER LAYER "PCBM_NOTES" BY THE TEXT "PLACE MARKINGS HERE".
7	MARKINGS: THE SIDE ONTO WHICH PLACE THE MARKINGS IS AT THE SUPPLIER DISCRESSION UNLESS OTHERWISE NOTED ONTO THE LAYER "PCBM_NOTES"
8	SUPPLIER SHALL CHECK PCBM_NOTES LAYER BEFORE ASKING FOR CLARIFICATIONS
9	MANUFACTURE TENTED/PLUGGED VIAS AS SPECIFIED IN THE GERBER FILES

SPECIFICATIONS

LENGHT	**100.00mm**
WIDTH	**154.00mm**
LAYERS	**4**
MATERIAL	**FR-4**
MATERIAL MIN TG	**130-140**
TRACK WIDTH/CLEARANCE	**0.2mm / 0.15mm**
THICKNESS	**1.6mm**
COPPER THICKNESS	**35um (1oz)**
SOLDERMASK	**YES, TOP AND BOTTOM**
SOLDERMASK COLOR	**GREEN**
SILKSCREEN	**YES, TOP AND BOTTOM**
SILKSCREEN COLOR	**WHITE**
SURFACE FINISH	**HASL LEAD FREE**
GOLD FINGERS	NO
CHAMFERING	NO
IMPEDANCE CONTROL	YES
HALF-CUT/CASTELLATED HOLES	NO
BURIED/BLIND VIAS	NO
VIAS FILLED WITH RESIN	NO
CARBON MASK	NO
COUNTERSINKS/COUNTERBORES	NO
Z-AXIS MILLING	NO
PEELABLE SOLDERMASK	NO

Content table.

Pag 1. Layer stackup & Transmision line impedance table
Page 2. Board Shape dimensions & Layer stackup table
Page 3. Drill table & Drill drawing
Page 4. Copper Layers
Page 5. Top solder & paste layers
Page 6. Bottom solder & Paste layers
Page 7. Top & Bottom Overlay layers


Title: PCB MANUFACTURING SPECIFICATIONS		**Author:** J-E.Pachon	CONFIDENTIAL	www.somosinternet.com
Size: A3	**Prj:** CABINET IOT	**Approved:** J-D.Diaz	**Revision:** =Global_Revision	
Unit: mm		**Edited:** 12/11/2026	**Version:** =Global_Version	
Date: 12/11/2026	Sheet 1 of 8	**Variant:** EVT-1		
Git Hash: f9749d038829dbd92270b366bd3e33c126213dfd [Modified]		**SW version:** 25.8.1.18		

Layer stackup & Transmision line impedance table

Transmission Line Structure Table

Impedance Id	Transmission Line	Target Impedance	Calculated Impedance	Trace layer	Wide Trace Width	Narrow Trace Width	Reference layers	Substack	Clearance	Target Tolerance
1	Coated Microstrip	50	50.24	Top Layer	0.20mm	0.20mm	Int 1 - GND	Board Layer Stack	0.13mm	10%
2	Edge-Coupled Coated Microstrip	100	99.58	Top Layer	0.16mm	0.16mm	Int 1 - GND	Board Layer Stack	0.13mm	10%
3	Edge-Coupled Coated Microstrip	90	89.97	Top Layer	0.18mm	0.18mm	Int 1 - GND	Board Layer Stack	0.13mm	10%
4	Coated Microstrip	50	50.24	Bottom Layer	0.20mm	0.20mm	Int 2 -PWR	Board Layer Stack	0.13mm	10%
5	Edge-Coupled Coated Microstrip	100	99.58	Bottom Layer	0.16mm	0.16mm	Int 2 -PWR	Board Layer Stack	0.13mm	10%
6	Edge-Coupled Coated Microstrip	90	89.97	Bottom Layer	0.18mm	0.18mm	Int 2 -PWR	Board Layer Stack	0.13mm	10%

Layer Stack Legend

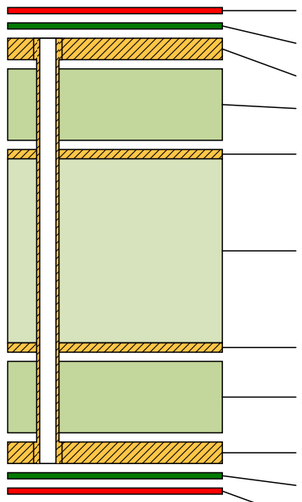


Material	Layer	Thickness	Dielectric Material	Type	Gerber
	Top Overlay			Legend	GTO
Surface Material	Top Solder	0.010mm(0mil)	SM-004	Solder Mask	GTS
CF-004	**Top Layer**	**0.035mm(1mil)**		**Signal**	**GTL**
Prepreg		*0.116mm(5mil)*	*PP-006*	*Dielectric*	
CF-004	**Int 1 - GND**	**0.015mm(1mil)**		**Signal**	**G1**
Core		*1.265mm(50mil)*	*Core-043*	*Dielectric*	
CF-004	**Int 2 -PWR**	**0.015mm(1mil)**		**Signal**	**G2**
Prepreg		*0.116mm(5mil)*	*PP-006*	*Dielectric*	
CF-004	**Bottom Layer**	**0.035mm(1mil)**		**Signal**	**GBL**
Surface Material	Bottom Solder	0.010mm(0mil)	SM-004	Solder Mask	GBS
	Bottom Overlay			Legend	GBO

Total thickness: 1.618mm(64mil)

Title: PCB MANUFACTURING SPECIFICATIONS		**Author:** J-E.Pachon	**CONFIDENTIAL**	
		Approved: J-D.Diaz	**Revision:** =Global Revision	
Size: A3	**Prj:** CABINET IOT	**Edited:** 12/11/2026	**Version:** =Global Version	
Unit: mm		**Variant:** EVT-1		
Date: 12/11/2026	Sheet 2 of 8	**SW version:** 25.8.1.18		
Git Hash: f9749d038829dbd92270b366bd3e33c126213dfd [Modified]				

www.somosinternet.com

Board Shape dimensions & Layer stackup table

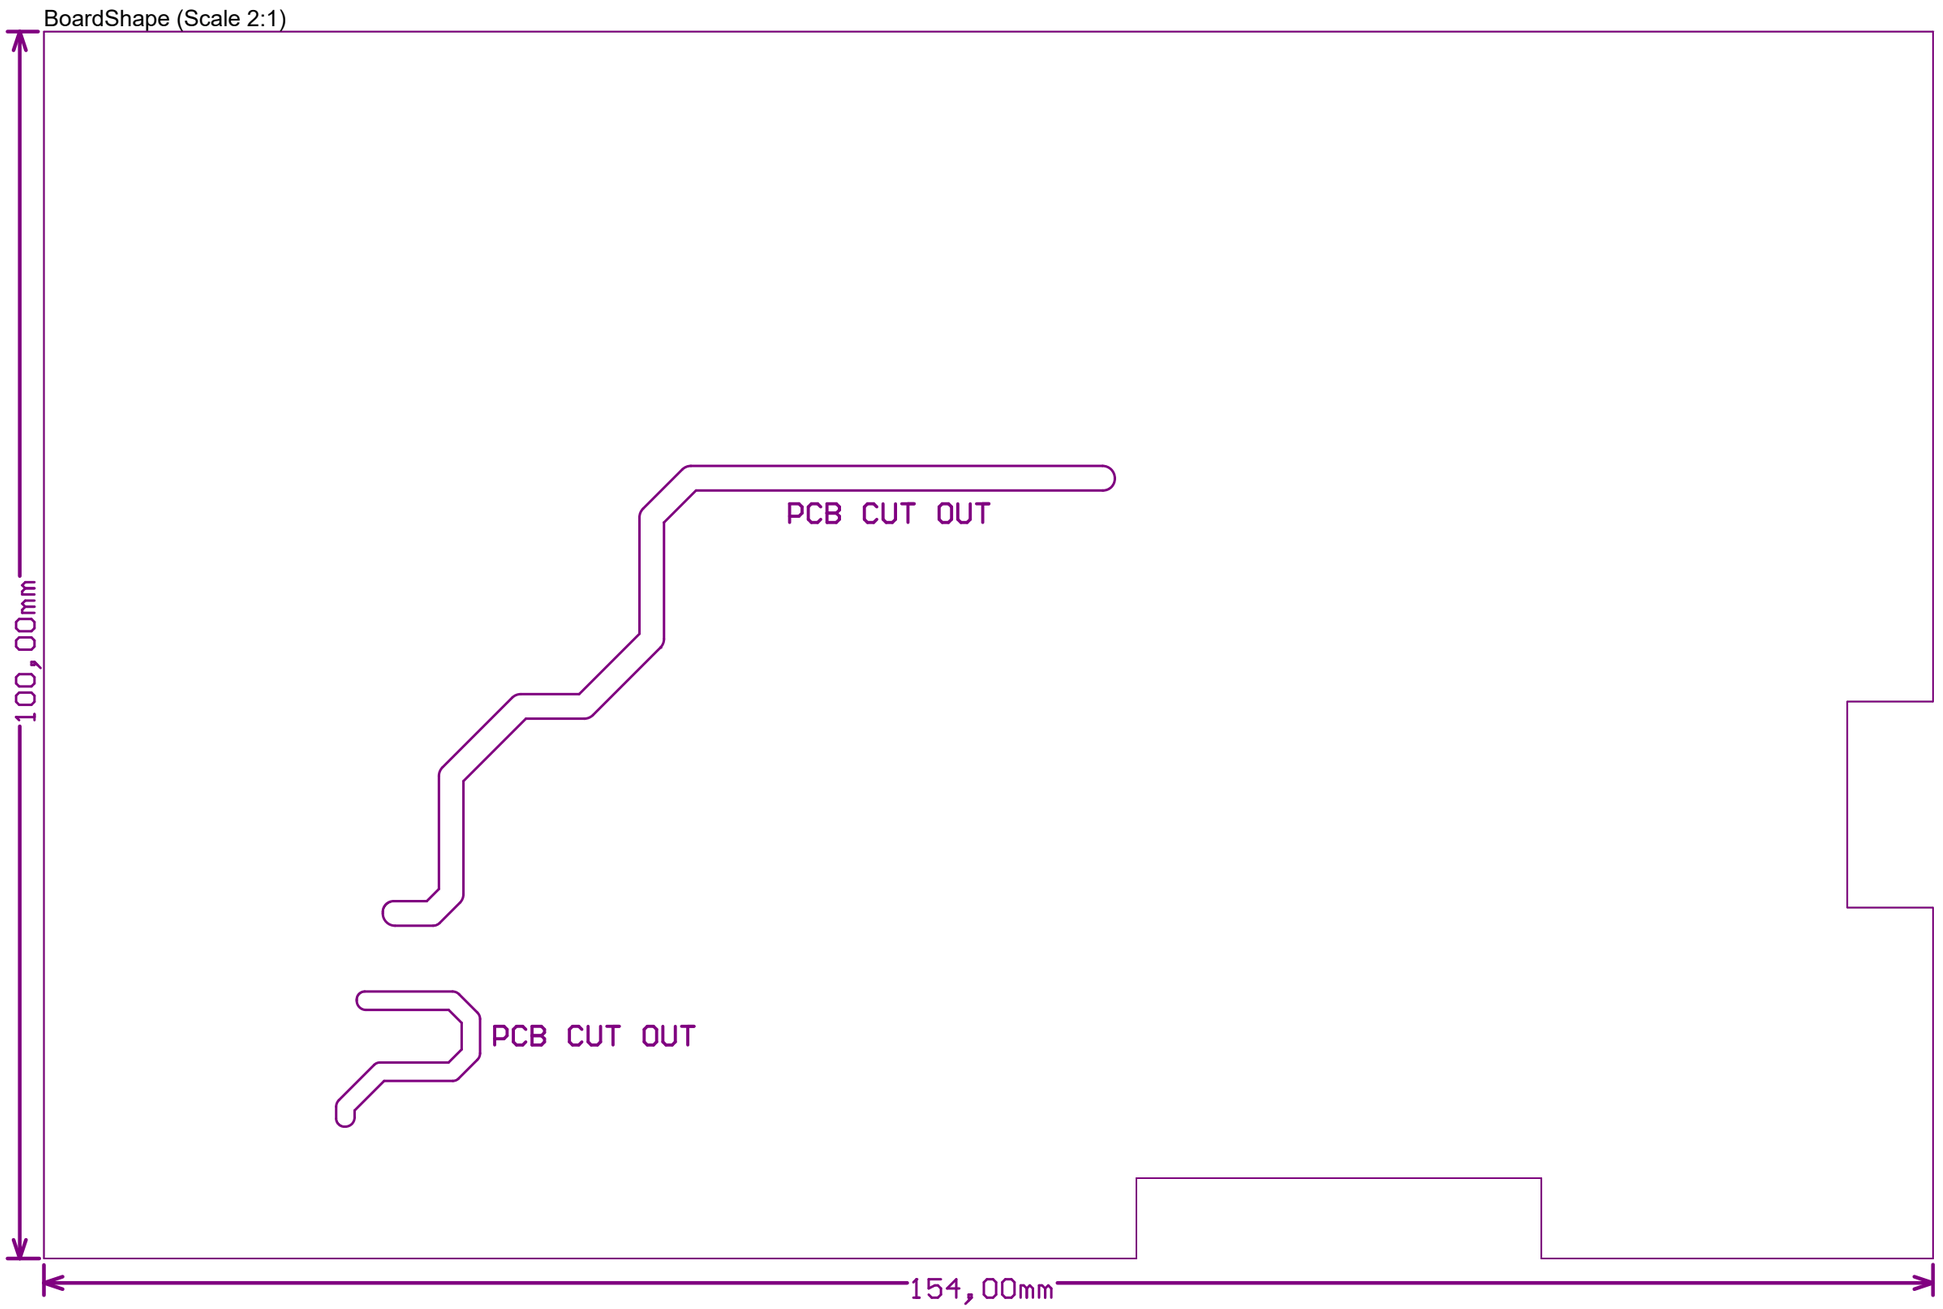


ALWAYS CAREFULLY READ THE NOTES ON THIS LAYER WHEN THE FILES WERE OPEN WITH THE CAM TOOL!

Title: PCB MANUFACTURING SPECIFICATIONS		**Author:** J-E.Pachon	**CONFIDENTIAL**	www.somosinternet.com
		Approved: J-D.Diaz	**Revision:** =Global Revision	
Size: A3	**Prj:** CABINET IOT	**Edited:** 12/11/2026	**Version:** =Global Version	
Unit: mm		**Variant:** EVT-1		
Date: 12/11/2026	Sheet 3 of 8	**SW version:** 25.8.1.18		
Git Hash: f9749d038829dbd92270b366bd3e33c126213dfd [Modified]				

Drill table & Drill drawing view

Drill Drawing View (Scale 1.5:1)

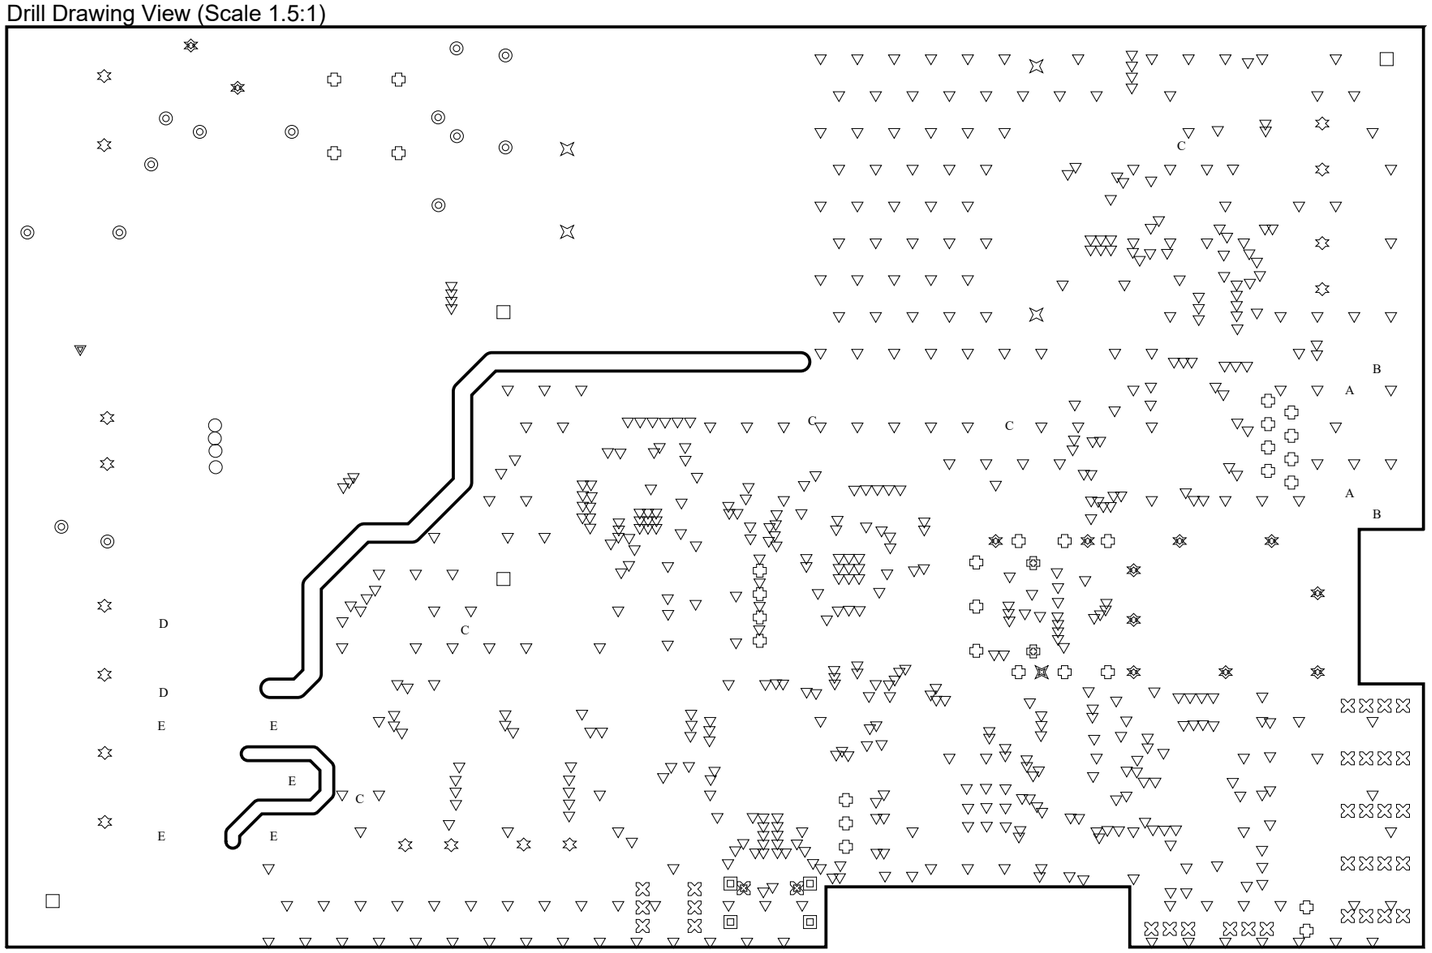

Drill Table


Symbol	Count	Hole Size	Plated	Hole Tolerance
○	4	0.30mm	Plated	
▽	609	0.30mm	Plated	
B	2	0.40mm	Plated	
◫	4	0.60mm	Plated	
C	5	0.64mm	Plated	
⊠	2	0.65mm	Non-Plated	
⊠	1	0.90mm	Plated	
D	2	0.91mm	Plated	
◎	14	0.95mm	Plated	
✣	30	1.00mm	Plated	
⊠	32	1.06mm	Plated	
✣	12	1.10mm	Plated	
E	5	1.40mm	Plated	
⊠	4	1.50mm	Plated	
◫	2	1.60mm	Non-Plated	
✣	16	1.60mm	Plated	
A	2	3.20mm	Non-Plated	
▽	1	3.20mm	Plated	
□	4	3.50mm	Plated	
	751 Total			

Title: PCB MANUFACTURING SPECIFICATIONS		**Author:** J-E.Pachon	**CONFIDENTIAL**
		Approved: J-D.Diaz	**Revision:** =Global Revision
Size: A3	**Prj:** CABINET IOT	**Edited:** 12/11/2026	**Version:** =Global Version
Unit: mm		**Variant:** EVT-1	
Date: 12/11/2026	Sheet 4 of 8	**SW version:** 25.8.1.18	
Git Hash: f9749d038829dbd92270b366bd3e33c126213dfd [Modified]			


www.somosinternet.com

Copper layers


Top Layer (Scale 1:1)

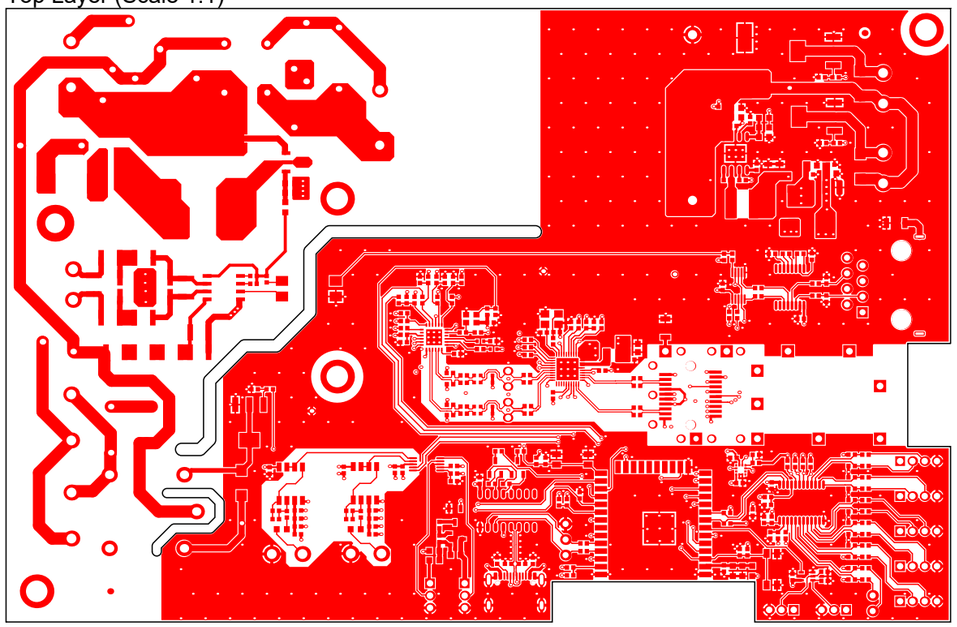


Int 1 - GND (Scale 1:1)

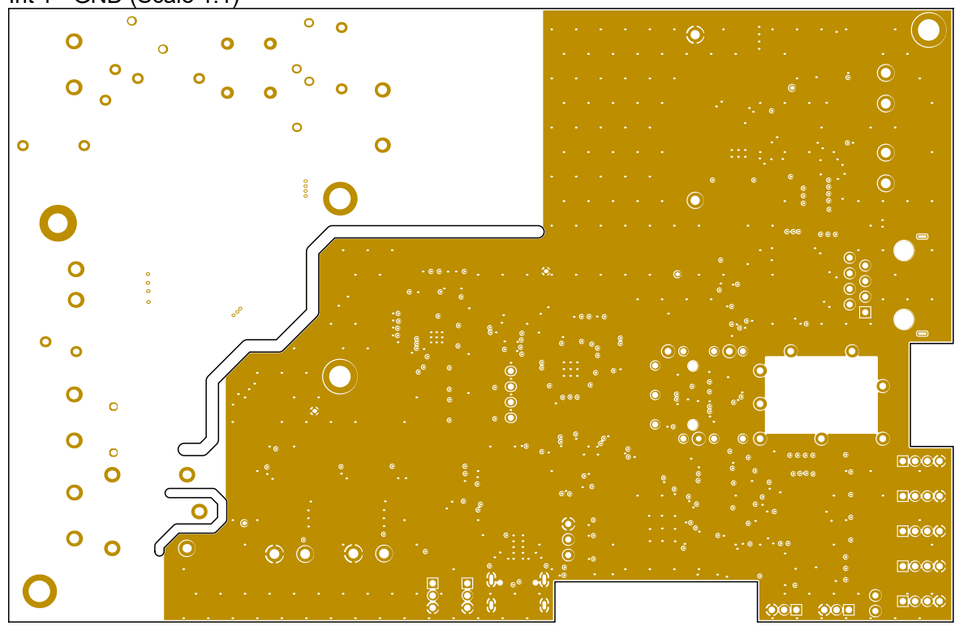

Int 2 -PWR (Scale 1:1)

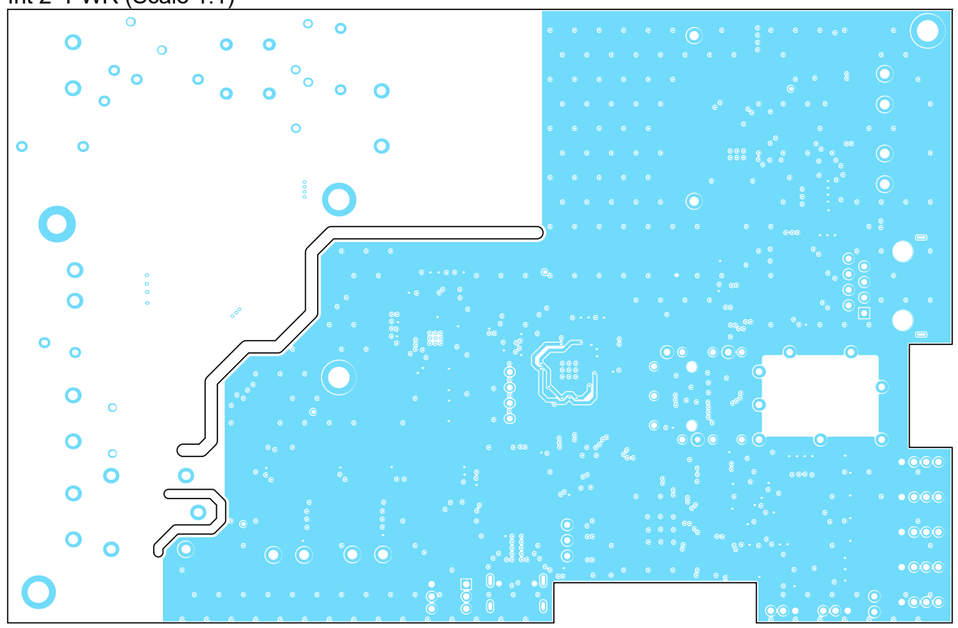

Bottom Layer (Scale 1:1)

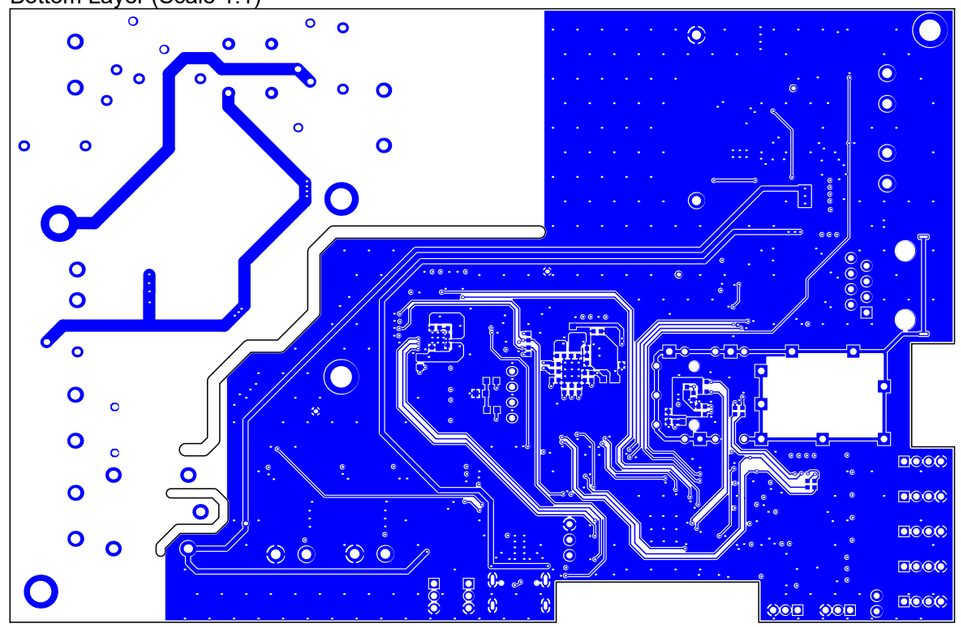


Title: PCB MANUFACTURING SPECIFICATIONS		**Author:** J-E.Pachon	**CONFIDENTIAL**		
		Approved: J-D.Diaz	**Revision:** =Global Revision		
Size: A3	**Prj:** CABINET IOT	**Edited:** 12/11/2026	**Version:** =Global Version		
Unit: mm		**Variant:** EVT-1			
Date: 12/11/2026	Sheet 5 of 8	**SW version:** 25.8.1.18			
Git Hash: f9749d038829dbd92270b366bd3e33c126213dfd [Modified]					


www.somosinternet.com

Top Solder & Paste layers

Top Paste (Scale 1.2:1)

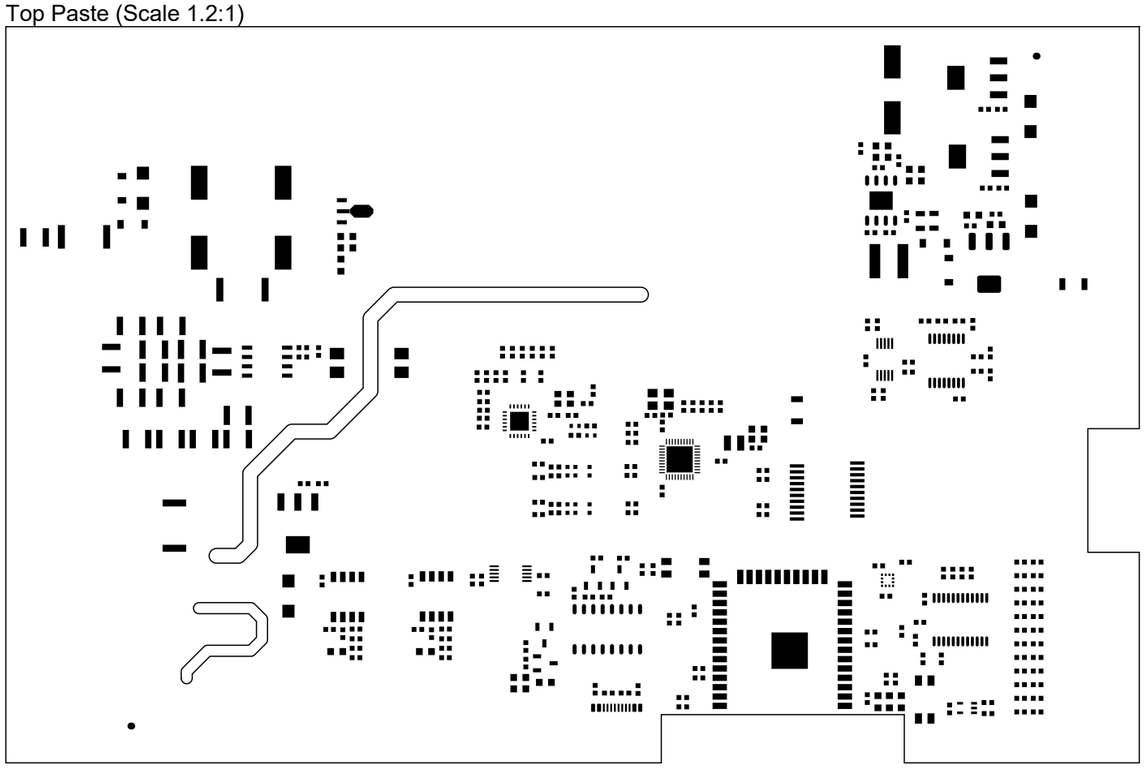

Top Solder (Scale 1.2:1)

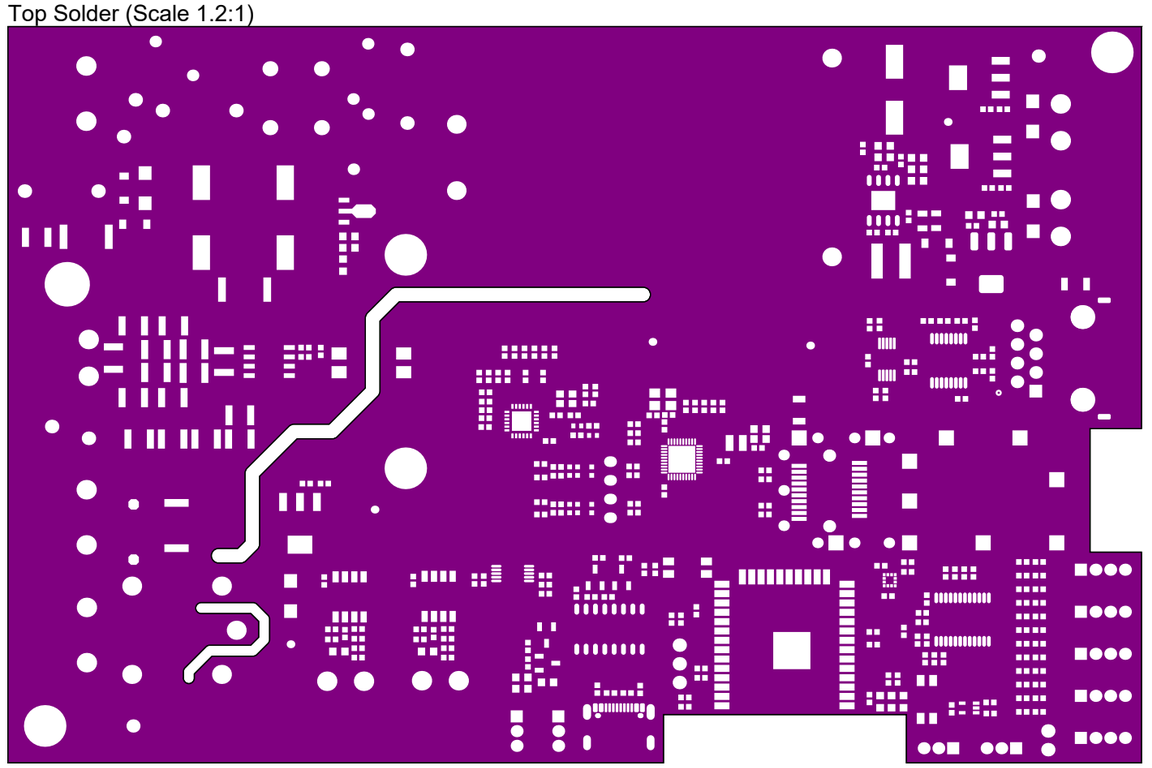


Title: PCB MANUFACTURING SPECIFICATIONS		**Author:** J-E.Pachon	**CONFIDENTIAL**
		Approved: J-D.Diaz	**Revision:** =Global Revision
Size: A3	**Prj:** CABINET IOT	**Edited:** 12/11/2026	**Version:** =Global Version
Unit: mm		**Variant:** EVT-1	
Date: 12/11/2026	Sheet 6 of 8	**SW version:** 25.8.1.18	
Git Hash: f9749d038829dbd92270b366bd3e33c126213dfd [Modified]			


www.somosinternet.com

Bottom Solder & Paste layers

Bottom Paste (Scale 1.2:1)

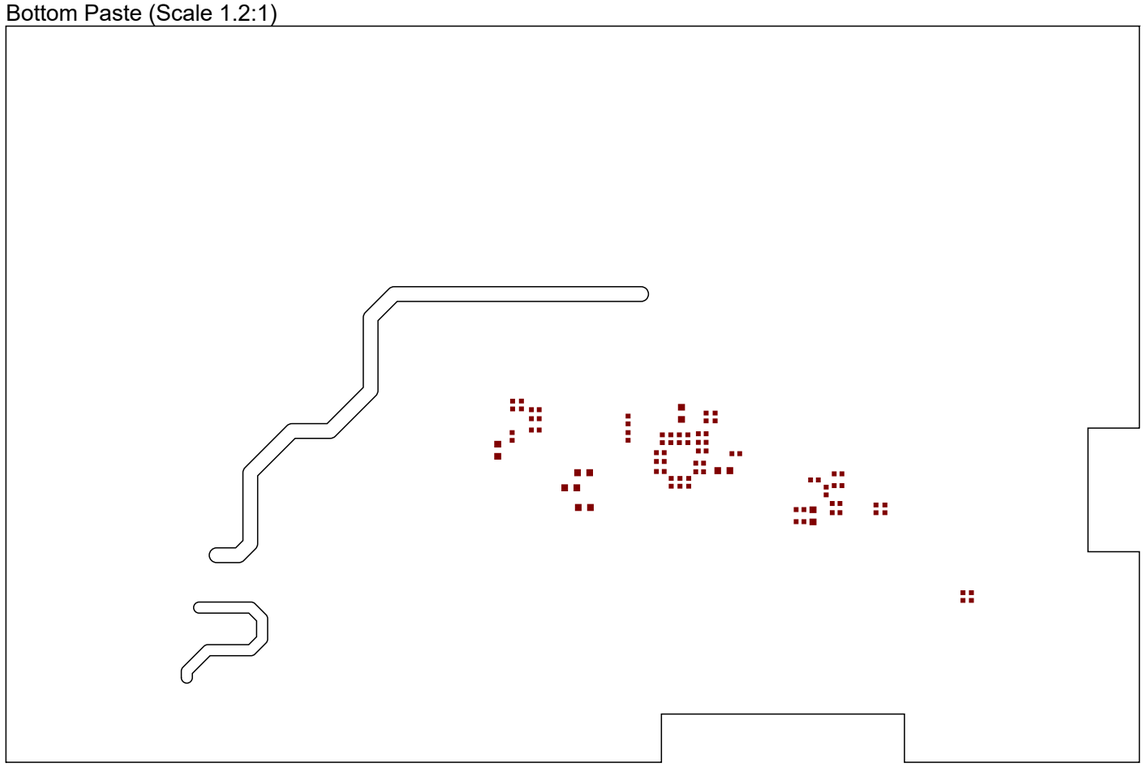

Bottom Solder (Scale 1.2:1)

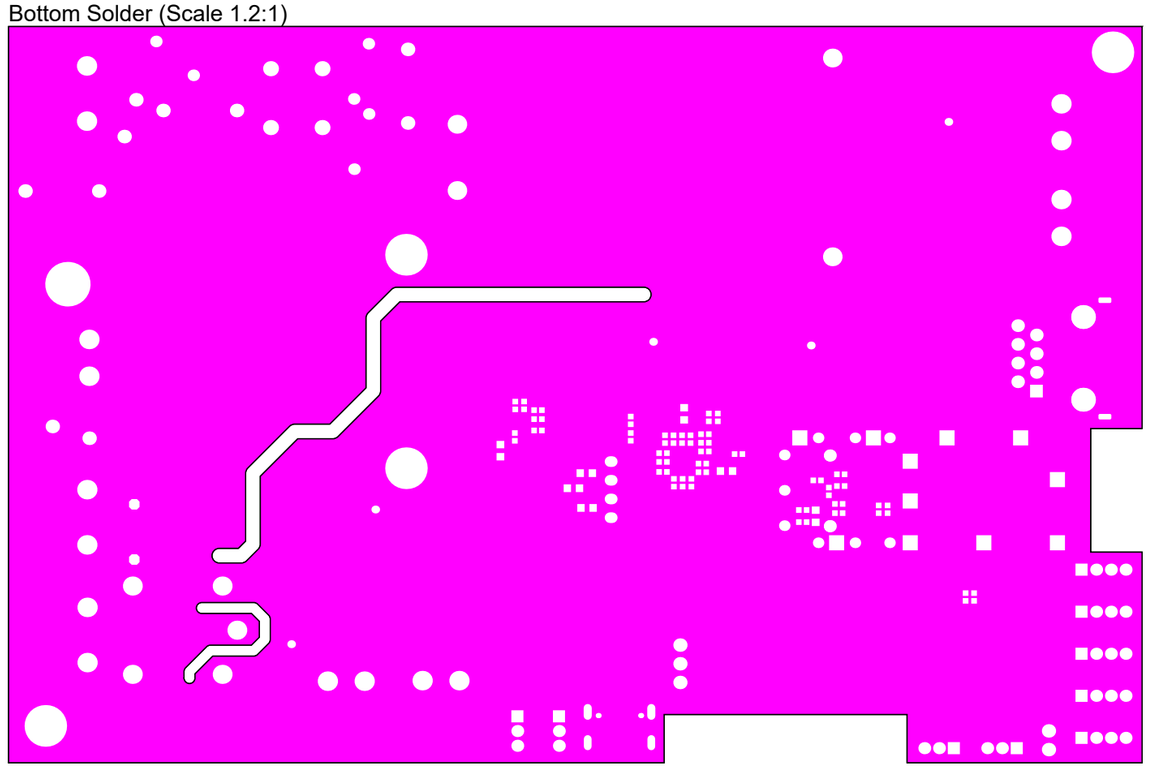


Title: PCB MANUFACTURING SPECIFICATIONS		**Author:** J-E.Pachon	**CONFIDENTIAL**		
		Approved: J-D.Diaz	**Revision:** =Global Revision		
Size: A3	**Prj:** CABINET IOT	**Edited:** 12/11/2026	**Version:** =Global Version		
Unit: mm		**Variant:** EVT-1			
Date: 12/11/2026	Sheet 7 of 8	**SW version:** 25.8.1.18			
Git Hash: f9749d038829dbd92270b366bd3e33c126213dfd [Modified]					


www.somosinternet.com

Top & Bottom Overlay layers

Top Overlay (Scale 1.2:1)

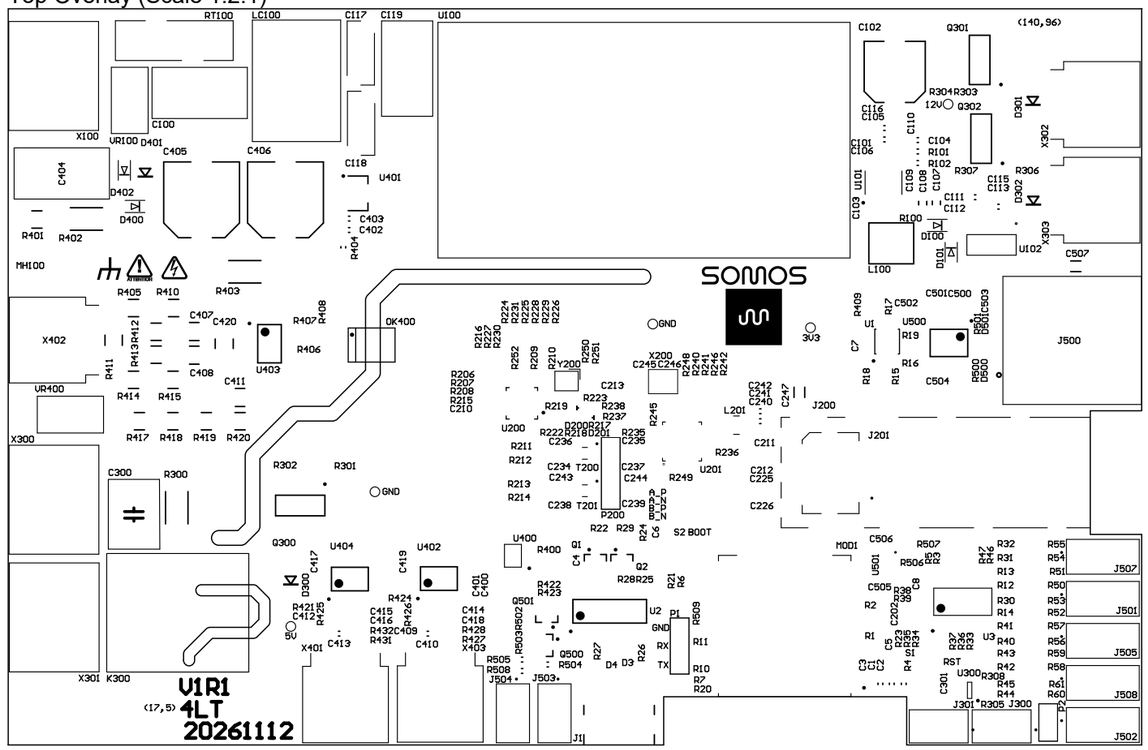

Bottom Overlay (Scale 1.2:1)

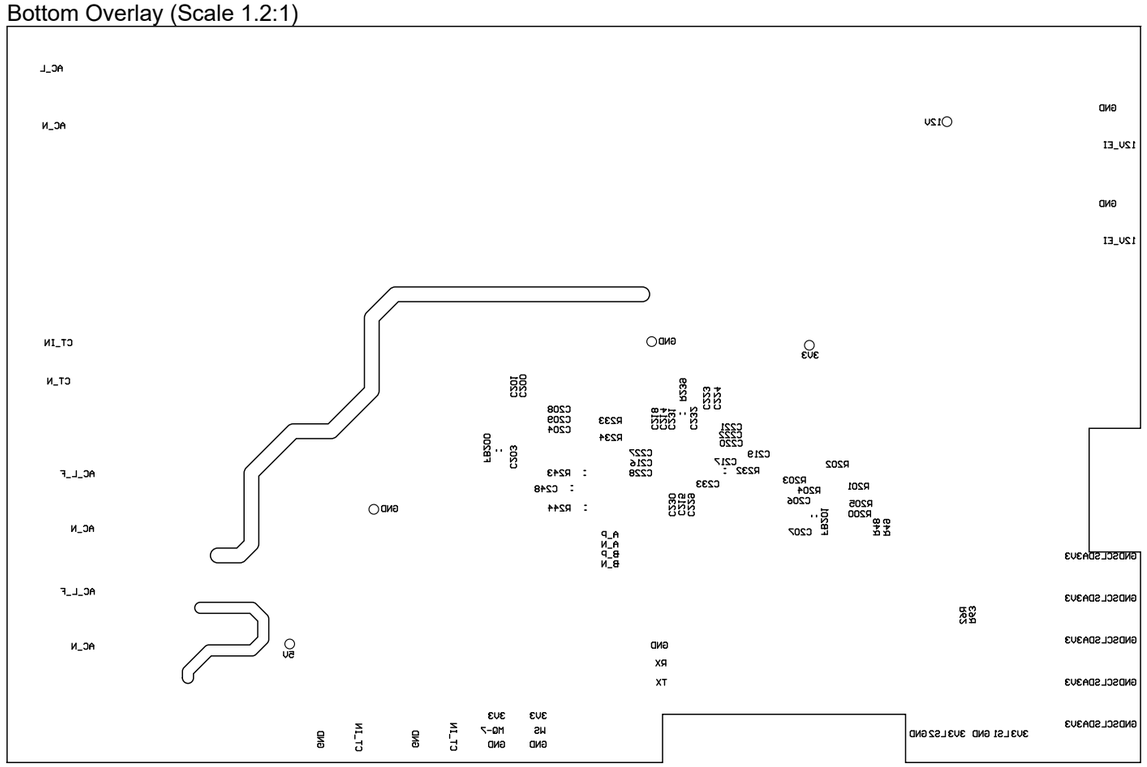

Title: PCB MANUFACTURING SPECIFICATIONS		**Author:** J-E.Pachon	**CONFIDENTIAL**
		Approved: J-D.Diaz	**Revision:** =Global Revision
Size: A3	**Prj:** CABINET IOT	**Edited:** 12/11/2026	**Version:** =Global Version
Unit: mm		**Variant:** EVT-1	
Date: 12/11/2026	Sheet 8 of 8	**SW version:** 25.8.1.18	
Git Hash: f9749d038829dbd92270b366bd3e33c126213dfd [Modified]			

www.somosinternet.com