
Python calculation for heat pump SIN-75TU

Parametric Heat Pump calculation

Dani Carbonell

dani.carbonell@solarenergy.ch

2019/03/12 at: 16:08:51 h

Table 1: Fitted coefficients for the heat pump.

Coefficient	Description	[kW]
PQ_1	1 st condenser polynomial coefficient	7.0114e+01
PQ_2	2 st condenser polynomial coefficient	7.6974e+02
PQ_3	3 st condenser polynomial coefficient	1.9787e+02
PQ_4	4 st condenser polynomial coefficient	-1.2662e+03
PQ_5	5 st condenser polynomial coefficient	1.0354e+03
PQ_6	6 st condenser polynomial coefficient	-1.0177e+03
$PCOP_1$	1 st COP polynomial coefficient	6.3036e+00
$PCOP_2$	2 st COP polynomial coefficient	4.6365e+01
$PCOP_3$	3 st COP polynomial coefficient	-3.4720e-01
$PCOP_4$	4 st COP polynomial coefficient	-1.3030e+02
$PCOP_5$	5 st COP polynomial coefficient	1.5616e+01
$PCOP_6$	6 st COP polynomial coefficient	-8.7543e+01
\dot{m}_{cond}	12700.00 [kg/h]	
\dot{m}_{evap}	12700.00 [kg/h]	
COP_{nom} (B0W35)	4.78	
$Q_{c,nom}$ (B0W35)	74.37 kW	
COP_{nom} (B2W35)	5.00	
$Q_{c,nom}$ (B2W35)	78.52 kW	
COP_{nom} (B10W35)	5.90	
$Q_{c,nom}$ (B10W35)	96.09 kW	

Table 2: Predicting results of the heat pump.

$T_{evap,in}$ °C	$T_{evap,out}$ °C	$T_{cond,in}$ °C	$T_{cond,out}$ °C	COP [-]	Q_{cond} [kW]	Q_{evap} [kW]	W_{comp} [kW]	\dot{m}_{cond} kg/h	\dot{m}_{evap} kg/h	ΔT_{evap} K	ΔT_{cond} K
-7.00	-10.44	25.92	30.00	4.31	60.32	46.33	13.99	12700	12700	3.4	4.1
-7.00	-10.30	34.67	38.75	3.78	60.38	44.40	15.98	12700	12700	3.3	4.1
-7.00	-9.93	43.54	47.50	3.07	58.50	39.42	19.08	12700	12700	2.9	4.0
-7.00	-9.19	52.55	56.25	2.17	54.72	29.52	25.21	12700	12700	2.2	3.7
-7.00	-7.35	61.65	65.00	1.10	49.49	4.68	44.82	12700	12700	0.3	3.3
-4.00	-7.86	25.52	30.00	4.65	66.28	52.03	14.25	12700	12700	3.9	4.5
-4.00	-7.70	34.29	38.75	4.08	65.99	49.82	16.18	12700	12700	3.7	4.5
-4.00	-7.31	43.19	47.50	3.33	63.77	44.61	19.16	12700	12700	3.3	4.3
-4.00	-6.58	52.22	56.25	2.39	59.63	34.71	24.92	12700	12700	2.6	4.0
-4.00	-4.88	61.35	65.00	1.28	53.96	11.83	42.13	12700	12700	0.9	3.7
-1.00	-5.30	25.10	30.00	5.00	72.45	57.95	14.50	12700	12700	4.3	4.9
-1.00	-5.12	33.89	38.75	4.39	71.82	55.45	16.37	12700	12700	4.1	4.9
-1.00	-4.71	42.81	47.50	3.60	69.26	50.00	19.26	12700	12700	3.7	4.7
-1.00	-3.97	51.87	56.25	2.62	64.77	40.05	24.72	12700	12700	3.0	4.4
-1.00	-2.38	61.03	65.00	1.46	58.68	18.60	40.08	12700	12700	1.4	4.0
2.00	-2.76	24.67	30.00	5.35	78.83	64.08	14.75	12700	12700	4.8	5.3
2.00	-2.55	33.48	38.75	4.70	77.87	61.30	16.58	12700	12700	4.6	5.3
2.00	-2.13	42.43	47.50	3.87	74.97	55.59	19.38	12700	12700	4.1	5.1
2.00	-1.38	51.51	56.25	2.85	70.14	45.55	24.59	12700	12700	3.4	4.7
2.00	0.13	60.69	65.00	1.65	63.65	25.16	38.49	12700	12700	1.9	4.3
5.00	-0.23	24.22	30.00	5.70	85.43	70.44	14.99	12700	12700	5.2	5.8
5.00	-0.00	33.06	38.75	5.01	84.14	67.36	16.78	12700	12700	5.0	5.7
5.00	0.44	42.03	47.50	4.15	80.91	61.40	19.51	12700	12700	4.6	5.5
5.00	1.19	51.13	56.25	3.09	75.73	51.23	24.50	12700	12700	3.8	5.1
5.00	2.65	60.34	65.00	1.85	68.85	31.62	37.23	12700	12700	2.3	4.7
8.00	2.28	23.76	30.00	6.06	92.24	77.01	15.22	12700	12700	5.7	6.2
8.00	2.53	32.62	38.75	5.34	90.63	73.64	16.99	12700	12700	5.5	6.1
8.00	2.99	41.61	47.50	4.43	87.06	67.41	19.66	12700	12700	5.0	5.9
8.00	3.76	50.73	56.25	3.33	81.54	57.09	24.46	12700	12700	4.2	5.5
8.00	5.17	59.97	65.00	2.05	74.30	38.07	36.22	12700	12700	2.8	5.0
11.00	4.78	23.29	30.00	6.42	99.26	83.80	15.46	12700	12700	6.2	6.7
11.00	5.05	32.17	38.75	5.66	97.33	80.14	17.19	12700	12700	6.0	6.6
11.00	5.53	41.18	47.50	4.72	93.44	73.63	19.81	12700	12700	5.5	6.3
11.00	6.31	50.32	56.25	3.58	87.58	63.14	24.44	12700	12700	4.7	5.9
11.00	7.69	59.59	65.00	2.26	79.97	44.57	35.40	12700	12700	3.3	5.4
14.00	7.25	22.80	30.00	6.79	106.49	90.80	15.68	12700	12700	6.7	7.2
14.00	7.55	31.70	38.75	5.99	104.24	86.85	17.39	12700	12700	6.5	7.1
14.00	8.05	40.73	47.50	5.01	100.03	80.07	19.96	12700	12700	5.9	6.8
14.00	8.84	49.90	56.25	3.84	93.85	69.40	24.45	12700	12700	5.2	6.3
14.00	10.20	59.19	65.00	2.47	85.88	51.15	34.73	12700	12700	3.8	5.8
17.00	9.72	22.29	30.00	7.16	113.92	98.02	15.90	12700	12700	7.3	7.7
17.00	10.03	31.22	38.75	6.33	111.36	93.77	17.59	12700	12700	7.0	7.5
17.00	10.56	40.27	47.50	5.31	106.84	86.72	20.12	12700	12700	6.4	7.2
17.00	11.37	49.46	56.25	4.10	100.33	75.85	24.48	12700	12700	5.6	6.8
17.00	12.70	58.77	65.00	2.69	92.02	57.85	34.17	12700	12700	4.3	6.2
20.00	12.17	21.78	30.00	7.54	121.57	105.45	16.12	12700	12700	7.8	8.2
20.00	12.50	30.72	38.75	6.67	118.70	100.91	17.79	12700	12700	7.5	8.0
20.00	13.05	39.80	47.50	5.62	113.86	93.58	20.28	12700	12700	7.0	7.7
20.00	13.87	49.01	56.25	4.36	107.03	82.51	24.52	12700	12700	6.1	7.2
20.00	15.20	58.34	65.00	2.92	98.38	64.68	33.70	12700	12700	4.8	6.7

Meier/SIN-75TU/SIN-75TU-Cop.pdf

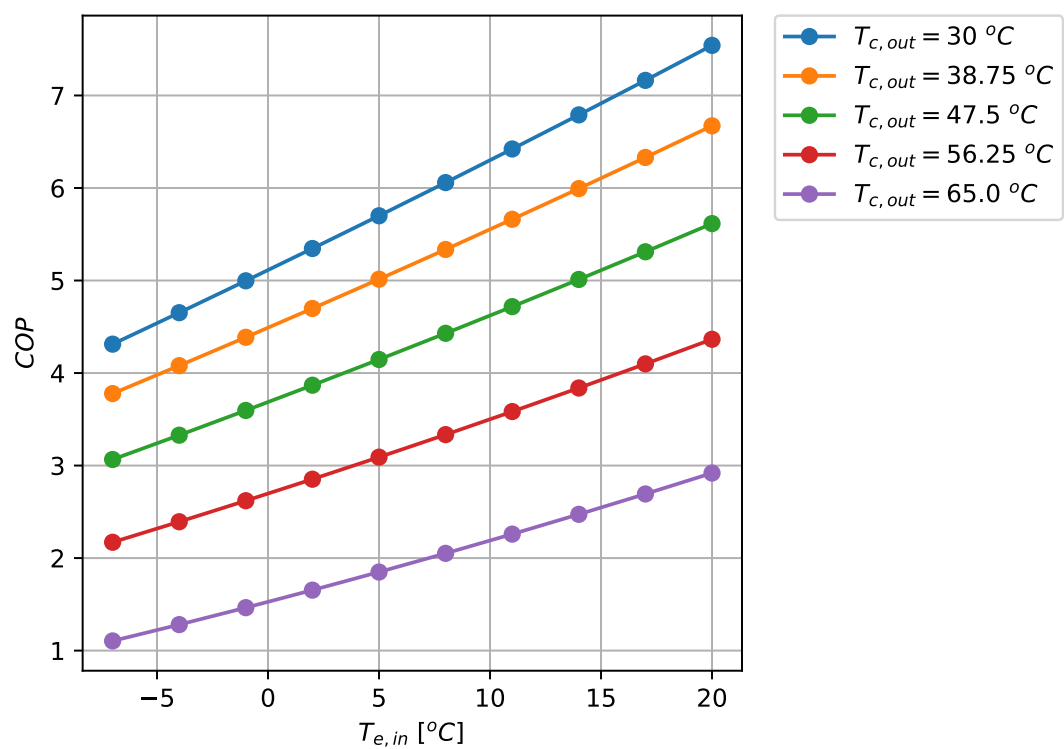


Figure 1: COP Results for the heat pump at the selected points

Meier/SIN-75TU/SIN-75TU-Qc.pdf

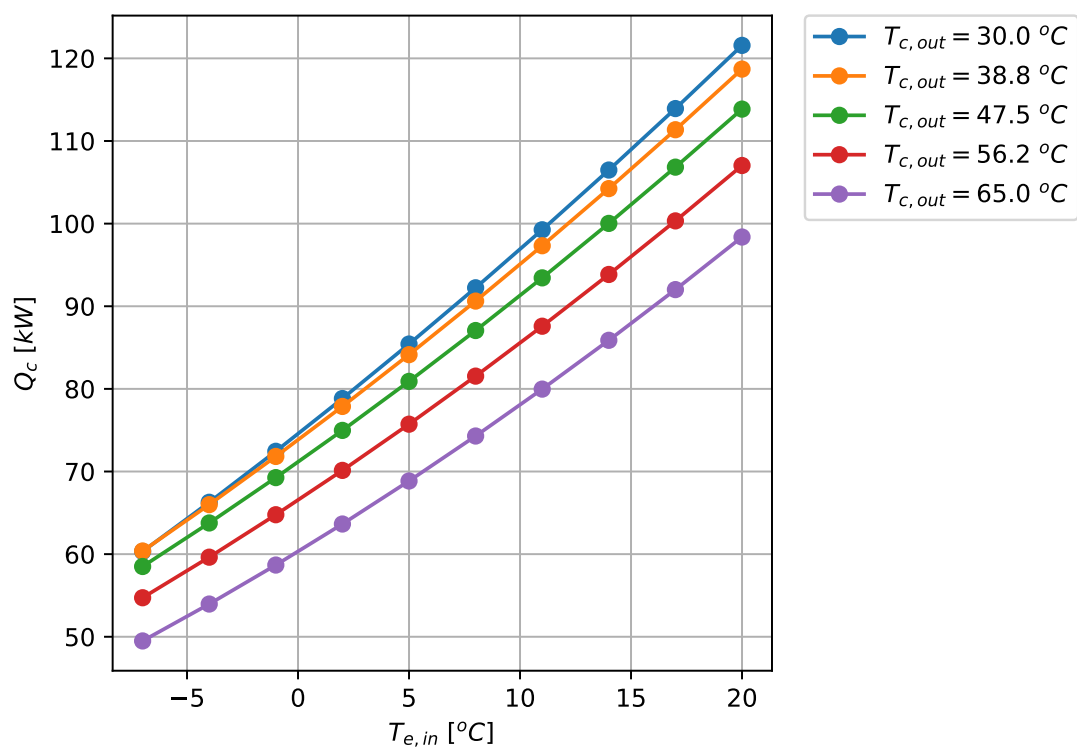


Figure 2: Q_c Results for the heat pump at the selected points