



## Type977 fitting for heat pump SIN-6TU Parametric Heat Pump calculation

Dani Carbonell

dani. carbonell@spf.ch

2019/03/12 at: 16:07:40 h





Table 1: Fitted coefficients for the heat pump.

Coefficient	Description	
		[kW]
$P_{Q_1}$	1 <sup>st</sup> condenser polynomial coefficient	5.7227e+00
$P_{Q_2}$	$2^{st}$ condenser polynomial coefficient	5.7862e + 01
$P_{Q_3}$	$3^{st}$ condenser polynomial coefficient	1.7105e+01
$P_{Q_4}$	4 <sup>st</sup> condenser polynomial coefficient	-5.8641e + 01
$P_{Q_5}$	$5^{st}$ condenser polynomial coefficient	5.0943e+01
$P_{Q_6}$	6 <sup>st</sup> condenser polynomial coefficient	-8.7032e+01
$P_{COP_1}$	1 <sup>st</sup> COP polynomial coefficient	6.4542e + 00
$P_{COP_2}$	2 <sup>st</sup> COP polynomial coefficient	6.2041e+01
$P_{COP_3}$	3 <sup>st</sup> COP polynomial coefficient	-3.1154e+00
$P_{COP_4}$	4 <sup>st</sup> COP polynomial coefficient	-2.2610e+02
$P_{COP_5}$	5 <sup>st</sup> COP polynomial coefficient	-5.4317e + 01
$P_{COP_6}$	6 <sup>st</sup> COP polynomial coefficient	-7.9441e+01
$\dot{m}_{cond}$	$1050.00 \ [kg/h]$	
$\dot{m}_{evap}$	$1050.00 \ [kg/h]$	
$COP_{nom} \text{ (A0W35)}$	4.63	
$Q_{cond,nom}$ (A0W35)	$6.06 \ [kW]$	
$Q_{evap,nom}$ (A0W35)	4.76 [kW]	
$W_{comp,nom}$ (A0W35)	1.31 [kW]	
$RMS_{COP}$	4.45e - 02	
$RMS_{Q_{cond}}$	1.93e - 02	
$RMS_{W_{comp}}$	1.82e - 02	
Fit model	Average Temperature	





Table 2: Differences between experiments and fitted data for the heat pump.  $error = 100 \cdot |\frac{Q_{exp} - Q_{num}}{Q_{exp}}|$  and  $RMS = \sqrt{\sum \frac{(Q_{exp} - Q_{num})^2}{n_p}}$  where  $n_p$  is the number of data points.

$T_{cond,out}$	$T_{evap,in}$	COP	$COP_{exp}$	error	$Q_{cond}$	$Q_{cond,exp}$	error	$W_{comp}$	$W_{comp,exp}$	error
${}^{o}C$	${}^{i}_{evap,in}$ ${}^{o}C$	[-]	[-]	[%]	[kW]	[kW]	[%]	[kW]	[kW]	[%]
35.00	-5.00	4.03	4.00	0.8	5.29	5.30	0.2	1.31	1.32	0.99
35.00	0.00	4.68	4.69	0.3	6.13	6.10	0.4	1.31	1.32	0.55
35.00	5.00	5.30	5.30	0.0	6.99	7.00	0.4	1.32	1.32	0.11
50.00	-5.00	2.90	2.88	0.5	4.95	4.97	0.1	1.71	1.72	0.10
50.00	0.00	3.34	3.28	1.9	5.74	5.70	0.4	1.71	1.72	1.10
50.00	5.00	3.76	3.69	2.0	6.57	6.57	0.0	1.72	1.74	1.10
45.00	-5.00	3.33	3.37	1.1	5.12	5.13	0.1	1.75	1.78	0.79
45.00	0.00	3.84	3.88	1.1	5.93	5.13	0.3	1.54	1.52	1.50
	II.	4.33								
45.00	5.00		4.38	1.0	6.77	6.78	0.2	1.56	1.55	0.75
55.00	0.00	2.78	2.81	0.9	5.51	5.50	0.2	1.98	1.96	1.12
55.00	5.00	3.14	3.16	0.7	6.33	6.35	0.3	2.02	2.01	0.42
35.00	10.00	5.91	5.90	0.2	7.89	7.90	0.2	1.34	1.34	0.32
35.00	15.00	6.48	6.47	0.2	8.81	8.80	0.1	1.36	1.36	0.08
50.00	10.00	4.16	4.08	1.9	7.43	7.43	0.0	1.79	1.82	1.88
50.00	15.00	4.54	4.46	1.7	8.32	8.30	0.3	1.83	1.86	1.43
45.00	10.00	4.80	4.85	1.0	7.64	7.67	0.4	1.59	1.58	0.66
45.00	15.00	5.25	5.31	1.1	8.54	8.55	0.1	1.63	1.61	1.04
55.00	10.00	3.47	3.50	0.8	7.18	7.20	0.3	2.07	2.06	0.50
55.00	15.00	3.78	3.82	1.0	8.06	8.05	0.1	2.13	2.11	1.15
Sum				18.4			5.0			17.35
$RMS_{COP}$	4.45e - 02									
$RMS_{O}$	1.93e - 02									
$RMS_{W_{comp}}^{Q_{cona}}$	1.82e - 02									

3





## $\rm Meier/SIN\text{-}6TU/SIN\text{-}6TU\text{-}Qcond.pdf$

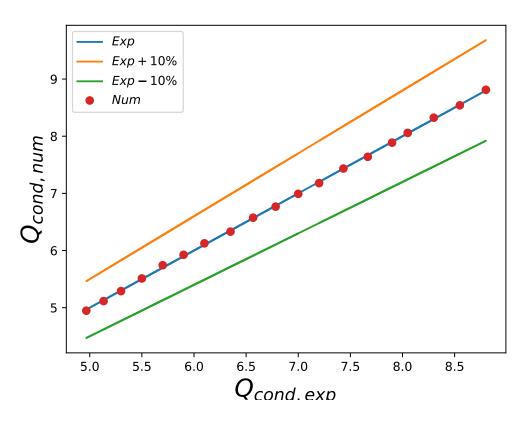


Figure 1:  $Q_{cond}$  differences between experiments and fitted data





## ${\it Meier/SIN-6TU/SIN-6TU-Qcomp.pdf}$

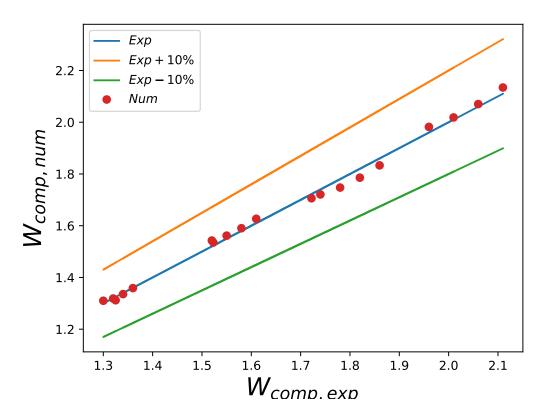


Figure 2:  $W_{comp}$  differences between experiments and fitted data





## $\rm Meier/SIN\text{-}6TU/SIN\text{-}6TU\text{-}COP.pdf$

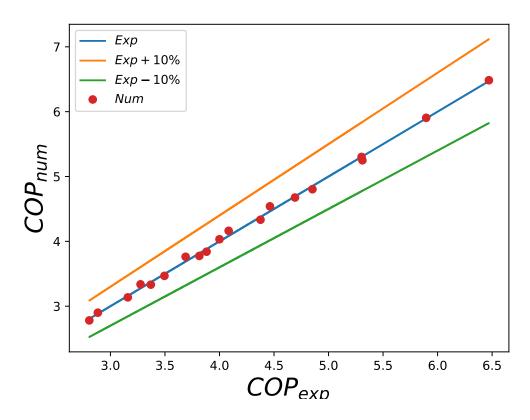


Figure 3: COP differences between experiments and fitted data