Part E
Industrial Development



E

INDUSTRIAL DEVELOPMENT:

E.1 Introduction
E.2 Objectives
E.3 General Provisions
E.4 Site Layout
E.5 Building Setbacks
E.6 Cut and Fill
E.7 Building Design and Appearance
E.8 Parking and Vehicular Access
E.9 Landscaping
E.10 Fences

SPECIAL INDUSTRIAL AREAS:

Locality 1 Land off Sirius Road

TABLE OF CONTENTS

Industrial Development 3
E.1 Introduction 3
E.2 Objectives 3
E.3 General Provisions 3
E.4 Site Layout 3
E.5 Building Setbacks 5
E.6 Cut and Fill 6
E.7 Building Design and Appearance 6
E.8 Parking and Vehicular Access 7
E.9 Landscaping 10
E.10 Fences 11
Locality 1 – Land off Sirius Road 12
E.11 Land to which this section applies 12
E.12 Relationship to other DCP Controls 12
E.13 Objectives 12
E.14 Provisions 12

Industrial Development

E.1 Introduction

This part of the plan applies to the land zoned 'General Industrial E4' and 'Working Waterfront W4' as per the Lane Cove Council LEP 2009.

E.2 Objectives

The objectives are:

1. To promote industrial development which is both functional and attractive in the context of its local environment through appropriate design.
2. To ensure that all new development is compatible with the existing character of the locality in which it is located.
3. To encourage innovative industrial design which adds to and enhances the quality of the existing industrial areas.
4. To address access to the site other than by private motor vehicle.
5. To promote a pedestrian network throughout the industrial area.

E.3 General Provisions

This part contains the general controls that apply to all employment and waterway zones as well as specific controls applying to particular centres such as Land off Sirius Road.

E.4 Site Layout

Objectives

The objectives of the site layout are:

1. To minimise any adverse environmental effects through planning of the site's layout.
2. To ensure the development is compatible with the streetscape and addresses the public domain.
3. To provide good access to pedestrians and cyclists.

Provisions

a) Industrial sites are to be designed to locate offices addressing and activating the street/s where possible. The warehouse/factory functions as well as car parking, manoeuvring areas, loading and unloading facilities are to be located within the site.

b) The total gross floor area used for ancillary office uses shall not exceed 49% for any one development.

b) New buildings and the creation of new industrial units in close proximity to residential areas are to be designed to minimise adverse effects on the amenity of residential areas including overshadowing, overlooking, lighting, dust, noise or fumes.

c) Internal spaces are to be designed to satisfy the operational requirements of the particular land use whilst providing a safe and convenient work environment.

d) Floor space is to be distributed on the site to ensure the scale of the building reinforces the role of the street and buildings are arranged and aligned to create a pleasant working environment.

e) Rights of way are encouraged to contribute to a pedestrian network throughout the industrial area.

f) Cycle parking and pedestrian access close to covered access areas is encouraged.

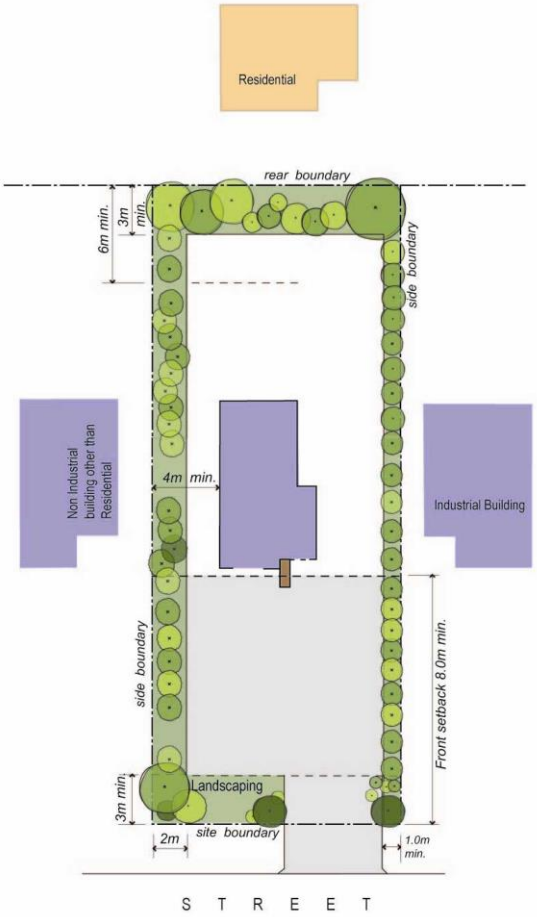


Diagram 1 - Setbacks for industrial development

E.5 Building Setbacks

Objectives

The objectives of setbacks are:

1. To minimise the impact of development and buildings on the surrounding area.
2. To create a pleasant environment within and external to the site through adequate landscaping.
3. To provide landscape to the street.

Provisions

a) Setbacks are to comply with the following table:

Boundary	Landscaping Strip (which will form part of building setback)	Minimum Building Setback
Front	3.0m	8.0m
Side and rear – adjoining industrial zone	Zero*	Zero*
Side and rear – adjoining non industrial uses	2.0m	4.0m

* Zero side and rear setbacks may be permitted where deep soil/landscaping provisions are met elsewhere on the site, BCA fire regulations are met and merit issues are deemed acceptable in relation to adjacent properties.

b) Landscaping strips are to be free from overhangs; hard elements such as paths, ramps, substations; fire hydrant boosters (where possible); signs and advertising structure (including pole signs). Landscaping strips may be used in calculation of landscaped area.

c) All front setbacks are to be landscaped to provide a high quality street presence. Front setback areas must not be used for storage or display of goods or excessive signage, loading/unloading or large areas of car parking.

d) Underground parking is to be situated underneath the building footprint and hard surfaces. The building setback is inclusive of the required landscaping strip as stipulated in the Setback Table.

e) **Corner Sites:** New development on sites that have a corner frontage is to provide an 8 metre front setback to the main street/road and a minimum 4 metre setback to the secondary road/street

E.6 Cut and Fill

Objectives

The objectives of cut and fill are:

1. To minimise the impact of excavation on surrounding properties.
2. To achieve reasonable landscaping within developments.
3. To ensure development relates to the street level and the topography.

Provisions

a) All development is to relate to the existing topography of the land at the time of the adoption of this DCP.

b) Excavation for major development is to be contained within the footprint of the development and hard surfaces.

c) For development within Centres, Council may consider full site coverage for underground excavation and podium footprints where it is demonstrated that mature landscaping, landscaped area and rainwater retention is able to be provided as roof terraces on podium structures.

d) Uses at ground level are to respond to the slope of the street by stepping frontages and entries to follow the slope.

E.7 Building Design and Appearance

Objectives

The objectives of building design and appearance are:

1. To encourage a high standard of environmental design within new and existing industrial areas.
2. To achieve high quality and innovative architectural design for industrial buildings.
3. To ensure industrial development presents attractive facades to adjoining uses.
4. To ensure industrial developments activate the public domain.

Provisions

New construction is to achieve both functional and visually attractive buildings.

a) Through careful site arrangements new building works should:

   I. Address the street with any non-industrial aspects (i.e. office section) of the development.

   II. Avoid long blank walls of warehouse units facing the street or public domain and long unbroken roof lines. If unavoidable, use of single material and colour should be avoided.

III. Rear boundary walls are to be treated aesthetically.

IV. Provide regular articulation to the façade or division of massing.

f) New buildings are to be designed to:

I. Express the structure of the building through creative architecture and minimise use of reflective glass or large blocks of one material.

II. Visually reinforce entrances, office components and stair wells of units to create rhythm on long facades and a reduction of perceived scale. Strongly express structural bays and bracing.

III. Provide variation of unit design within industrial unit developments.

IV. Introduce solid surfaces, with a mix of materials; incorporate horizontal and vertical modulation including windows in appropriate proportions and configurations.

V. Address all streets to which it presents.

g) Where blank walls on street frontages are unavoidable in new development they are to be treated as sculptural elements minimising bland streetscapes. They are to be finished to a high standard and minimise the potential for graffiti or other vandalism.

h) All rooftop or exposed structures including lift motor rooms, plant rooms, etc., together with air conditioning, ventilation and exhaust systems, are to be integrated with the building design in order to ensure interesting and high quality appearance.

i) **Corner Sites**: New development on corner sites is to address both street frontages in terms of facade treatment, fenestration and articulation of elevations.

E.8 Parking and Vehicular Access

Objectives

The objectives of parking and vehicular access are:

1. To ensure sufficient car parking is provided on-site to satisfy the likely peak parking demands of the development as per the RMS requirements.
2. To reduce potential conflict with street traffic and pedestrians.
3. To provide disabled parking where appropriate in accordance with RMS requirements.
4. Create attractive landscaped car parking throughout the development.
5. To provide sufficient secure bicycle storage facilities.

Provisions

a) Parking is to be integrated into the site planning and must be visually mitigated by minimum 3m landscape strip along the frontage and other high quality landscaping.

b) Separation is to be provided between service areas (i.e. loading and unloading areas) and parking. Service areas to be located and designed to facilitate convenient and safe usage.

c) Access/Driveways- Vehicular movements to and from the site should be designed to reduce potential conflict with street traffic and pedestrians.

d) Driveway width in front of the building line must be minimised.



Photo 1 - Poor example of integration of parking and landscaping

e) Car parking areas are to be broken up by canopy trees between car parking bays to reduce their visual impact. Car parking areas are not to be exposed to the street and where they adjoin other uses they are to be screened with landscaping to reduce their impact.

f) All vehicles should enter and leave the site in a forward direction.

g) No tandem parking facilities will be accepted for new developments.

h) Preferably, off-street parking is to be provided behind or at the side of buildings and away from street frontages.

i) Visitor car parking is to be located close to the office component of the development.

j) Loading docks should be positioned so they do not interfere with visitor and employee parking spaces and to ensure delivery vehicles do not stand on any public road, footway, laneway or service road.

k) Proposed parking areas, truck docks, driveways, vehicular ramps and turning areas are to be maintained clear of obstruction and used exclusively for purposes of car parking, loading or unloading and vehicular access respectively. Under no circumstances are such areas or any portion thereof to be used for the storage of goods and waste materials. These areas are to be physically line marked and are to be maintained free of obstruction, for the sole use of delivery vehicles.

l) Motorcycle parking spaces are to have an area of 1.2m x 3m.



Photo 2 - Good example of blank wall treatment



Photo 3 - Poor example of blank wall treatment

E.9 Landscaping

Objectives

The objective of landscaping is:

1. To improve the environmental amenity of industrial areas.
2. To screen unsightly land uses and open storage areas and provide buffers between industrial development and other land uses, especially residential.
3. To provide pedestrian linkages to surrounding streets on larger sites and through other sites to link with existing pedestrian networks.
4. To provide recreation areas for workers in larger developments.
5. To retain and provide for significant vegetation, particularly large and medium sized trees.
6. To conserve significant natural features of the site and contribute to effective management of biodiversity and to provide continuous vegetation corridors.
7. To encourage the planting of indigenous, native and low water consuming plants and trees.
8. To assist with on-site stormwater management.

Provisions

a) A minimum of 20 % of the site shall be provided as landscaped area.

b) In addition, a minimum of 10% of the site shall be provided and maintained as landscaped area or planting on structures, with lawns, trees, shrubs, for aesthetic purposes and the enjoyment of workers of the site. The minimum width for inclusion in calculations is 1.0m.

c) All car parking areas are to be landscaped so as to break up large expanses of paving and cars. Landscaping shall be provided around the perimeter and between aisles and every 10 car spaces plus along pedestrian access routes. Contrasting finishes shall be used to break up large sections of paving and to delineate pedestrian areas, entries or car parks. Porous paving should be utilised wherever possible.

d) Planter beds along the building façade are encouraged.

e) All unbuilt-upon areas of a site are to be landscaped to soften the impact of buildings and car parking areas.

f) Landscaping in the public domain should promote a cohesive landscape setting. Development is to provide street tree planting to match existing or to Council requirements, grasses, shrubs and accent planting or any combination of these.

g) Storage areas and other potentially unsightly areas must be effectively screened from adjacent properties.

h) Landscaping within setback areas should be of a similar scale to buildings on the industrial site. All landscaped areas are to be separated from vehicular areas by means of a kerb or other effective physical barriers.

i) In open parking areas at ground level, 1 shade tree per 10 spaces should be planted within the parking area.

j) A continuous landscaped buffer strip shall be provided between the driveway and side boundary. The buffer strip shall be a minimum of 2 metres, increasing to 3 metres where adjoining a residential land use. The buffer strip shall contain a mix of tall screen planting and plants with foliage at the ground level. Driveways central to the site shall be planted with avenue trees.

k) Parking and circulation areas are to be delineated by planter beds at the ends of parking bays. Planter beds shall be a minimum width of 1.5 m surrounded by a 150mm concrete kerb and shall contain both trees and shrubs.

E.10 Fences

Objectives

The objective of fences are:

1. To integrate the landscape theme and minimise any visual impacts to the streetscape.
2. To provide associated site security and passive surveillance to the public domain.

Provisions

a) All fencing along street frontage is required to be permeable metal palisade or picket finished in a suitable colour - dark colours are preferable. Maximum height allowed is 1.2 metres on street frontages.

b) Taller fencing should be behind the building line for security. However, security fencing may be considered forward of the building line (behind the front landscape strip) if required for specific industrial uses.

c) Chain wire is permitted only on the side and rear boundaries adjoining industrial developments, commencing at the front building alignment. All chain wire fencing is required to be black PVC coated.

d) If the side or rear boundary faces a side or rear boundary of a residential premises, a timber paling/colorbond fence (commencing at the front building alignment) is allowed along with acoustic fencing with planting.

e) Masonry retaining walls, if located along a street frontage are restricted to 600mm in height, where possible

f) Solid metal panel fences (sheet metal or similar) of any height are not permitted along the street frontage or in front of the building alignment.

Locality 1 – Land off Sirius Road

E.11 Land to which this section applies

This Clause applies to Lot 2 DP 884454 (formerly part of Lot 1 DP 546860) Sirius Road, West Lane Cove.

E.12 Relationship to other DCP Controls

The provisions for Industrial Development in this DCP continue to apply to the land in this locality, except in the event of any inconsistency, these locality controls shall prevail.

E.13 Objectives

The objectives of this Locality are to:

1. Provide for industrial development which is compatible with the environmentally sensitive nature of the area.
2. Encourage the design of buildings which will maintain the bushland character of the site when viewed from surrounding public lands, foreshore bush tracks, the Lane Cove River and Stringy Bark Creek.
3. Protect, maintain and enhance those parts of the site which contain bushland as identified on the DCP Map T05/36, dated October, 1998, and riparian vegetation and bushland which are considered part of the landscaping requirements for the site.
4. Provide for the location of buildings which allow for the provision of landscaping which will supplement the surrounding bushland area.
5. Provide for access improvements consistent with the traffic likely to be generated by development of the site.

E.14 Provisions

a) Buildings shall be setback a minimum of 10 metres from any boundary which adjoins an open space and minimum of 20 metres from Stringy Bark Creek.

b) The total gross floor area used for ancillary commercial or high technology uses, shall not exceed 49% of any one tenancy.

c) Access to the site and internal access roads shall be designed in accordance with the RTA's "Guide to Traffic Generating Development".

d) Building and work shall not be undertaken within the areas shown as bushland on the DCP Map T05/36, dated October, 1998. "Work" is defined as:-

   I. The erection of any structure on the land


   II. The removal of soil or rock from the land, and

   III. The deposit of soil, rock or any other matter on the land.

e) Applications shall be accompanied by a statement as to the means by which the bushland, within the areas shown bushland on the DCP Map T05/36 dated October, 1998 shall be protected at all times.

f) The requirements of the Environment Protection Authority for the containment area, which has been remediated.

g) A landscape plan for the site is to include the plant species which are locally indigenous to the site.

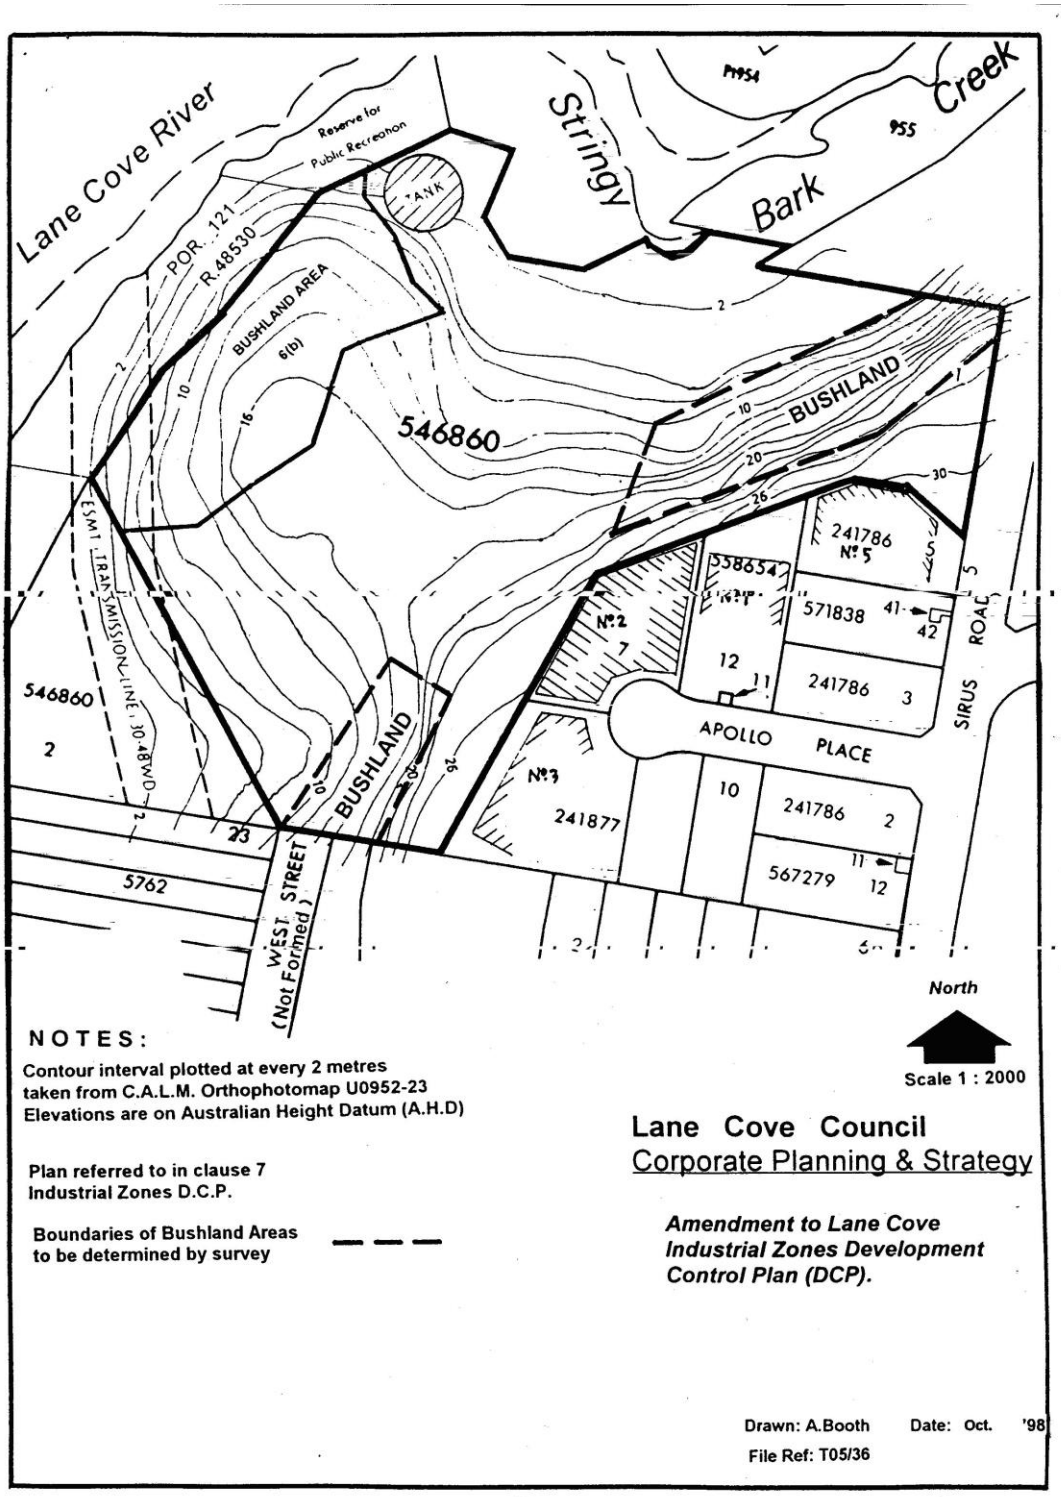

7a