

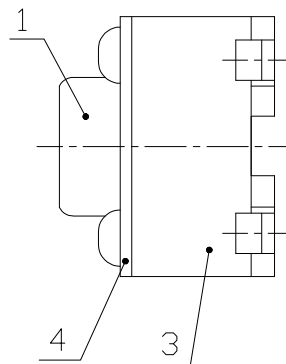


RoHS
Compatible

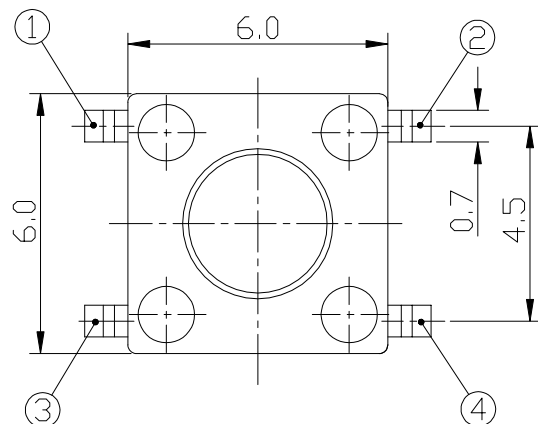

MODEL NO.	L	TAPE & REEL OPTION	0/Force
TD-06XA	5.0	YES	250±50gf
TD-06XB	7.0	NO	
TD-06XC	7.3	NO	
TD-06XD	8.0	NO	
TD-06XE	9.5	NO	
TD-06XF	12.5	NO	
TD-06XG	4.3	YES	

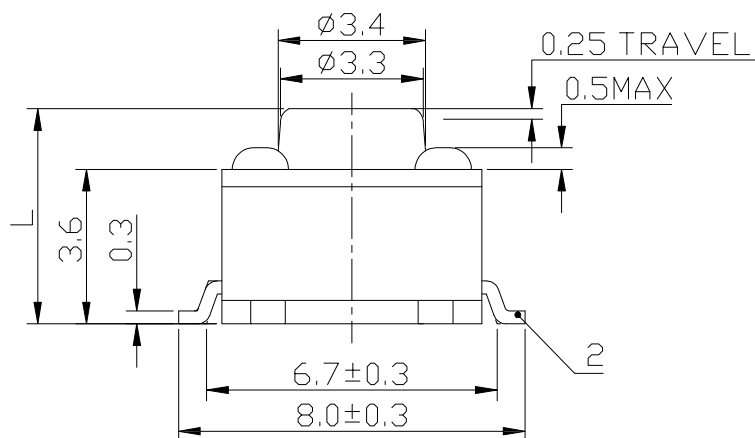

Specifications

- Rating : 50mA 12V DC
- Contact resistance : 100mΩ Max.
- Insulation resistance : 100MΩ min, 100V DC
- Withstanding voltage : 250V AC – 1minute
- Travel : 0.25^{+0.2}_{-0.1} mm

5	Contact	Phosphor Bronze	1	Ag Plated
4	Stem	Nylon66	1	—
3	Cover	PET	1	White
2	Terminal	Brass	4	Ag Plated
1	Case	Nylon 66	1	Black
NO	Part Name	Material	Q'ty	Finishing

东莞市瑞彼得电子科技有限公司

Dongguan Rui Peter Electronics Technology Co. Ltd..

TEX:13580805928 QQ:3504300686 <https://rui peter.1688.com>

DESIGN	BILL	SCALE		
DRAWING	LEE	UNIT	mm	
CHECK	JACK	SIZE	A4: 210*297	
APPROVAL	Eric	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	Tact Switch
less than 10 — ±0.2	PART NO	TD-06XB(SMD 6*6*7mm)
10~30 — ±0.3	DRAWING NO	
30~100 — ±0.5	DATE	2007/08/08
ANGIE — ±2°		