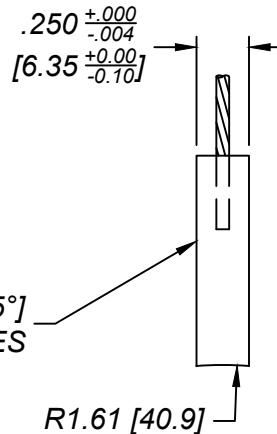
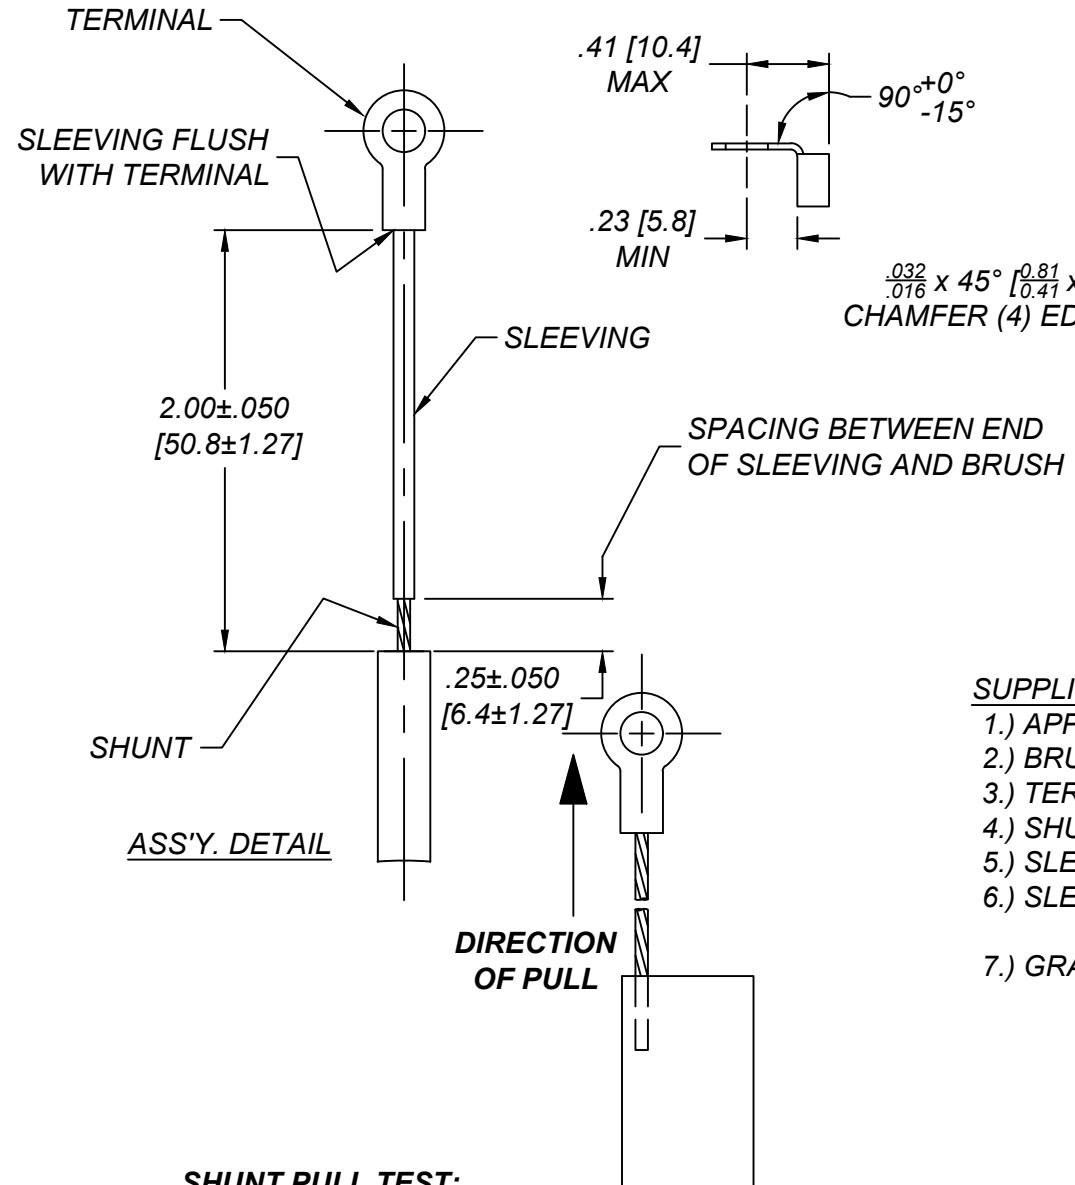



0572023

BRUSH DETAILSUPPLIER:

- 1.) APPROVED SOURCE: NGS DONON
- 2.) BRUSH GRADE : DN172
- 3.) TERMINAL TYPE: SPRING SPADE FOR #10 SCREW, BENT AT 90°
- 4.) SHUNT SIZE: #16
- 5.) SLEEVE SIZE: #10
- 6.) SLEEVE MATERIAL: ACRYLIC TREATED FIBERGLASS CLASS "F", GRADE C-2, RATED 1500 VOLTS
- 7.) GRADE DESIGNATION MUST BE MARKED ON BRUSH

SHUNT PULL TEST:

**SHUNT CONNECTIONS TO THE BRUSH AND TERMINAL MUST
WITHSTAND A 10 LB. [45N] MINIMUM PULL FORCE APPLIED IN
DIRECTION SHOWN WITH NO MOVEMENT AT ANY CONNECTION POINT.**



THIRD ANGLE PROJECTION
DRWG. SIZE
A

This print is the property of The Imperial Electric Company, and is loaned to the vendor, customer, or lender for inspection and/or approval. It is subject to return upon request.

ALL DIMENSIONS
MUST BE HELD WITHIN:
X.XXX ± .005 [0.127]
X.XX ± .010 [0.254]
X.X ± .015 [0.381]
X ± 1"
UNLESS OTHERWISE NOTED.



THE IMPERIAL ELECTRIC COMPANY

Akron, Ohio 44306

DRWG. SIZE
A

DESCRIPTION: BRUSH ASSEMBLY			
DRWN. BY: WCJ	SCALE: NONE	DRWG. #	0572023
REV. A	DATE: 07/30/2019	CHK. BY: JHE	REV. A