Nidec Confidential (DO NOT COPY AND/OR DISTRIBUTE this material without prior written consent of Nidec)

Characteristics to BP121	Quantity
▽S/R	0
◆	1
◇F	1

NMA	Part No.	Form	Drawing No.
DRAWING CONDITION		-	A09116260F (Rev. B)



DETAIL B
SCALE 5:1

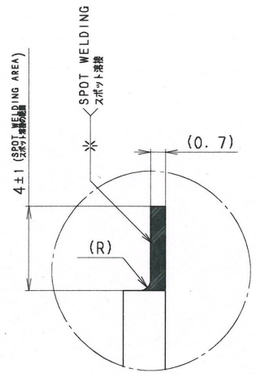

DETAIL C
SCALE 5:1



アイソメ図



DETAIL A
SCALE 5:1

Purpose Mass Production
Date 05/03/2020
Sign. Bhavad

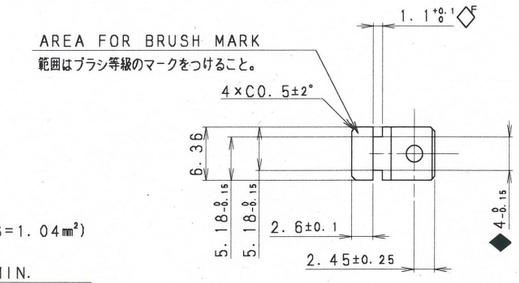

FLEXIBLE BRAID φ1.55 (S=1.04mm²)
SHUNT MATERIAL:OF-Cu
SHUNT PULL FORCE:2daN MIN.
柔軟な編組線 φ1.55 (S=1.04mm²)
材料:OF-Cu
引張り強さ:2daN MIN。

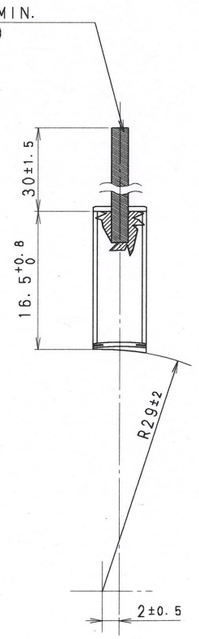

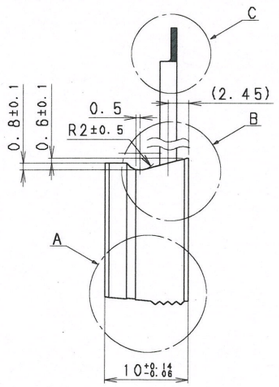

PHYSICAL CHARACTERISTICS SPECIFICATION		
Item		Specification
APPARENT DENSITY	(g/cm³)	2.75 ~ 3.15
SCLEROSCOPE HARDNESS	(HsD)	10 ~ 20
SPECIFIC RESISTANCE	(μΩ.cm)	100 ~ 600
TRANSVERSE STRENGTH	(MPa)	4 ~ 14
SHUNT WIRE CONNECTION DROP	(mV/5A)	MAX 10
SHUNT WIRE PULL STRENGTH	(N)	MIN 20
CHEMICAL COMPOSITION SPECIFICATION		
Item		Specification
COOPER		46.5±2.0
CARBON		50.5±2.0
MOLYBDENUM DISULFIDE		2.0±1.0
ZINC		1.0±0.5

NOTES)
1. IT SHOULD BE USED MATERIAL IN ACCORDANCE WITH MANEGEMENT STANDARD FOR ENVIRONMENT-RELATED SUBSTANCES AEM-SP-001.
   環境関連物質管理基準AEM-SP-001に準拠した材料を使用すること。
2. MUST GAIN THE APPROVAL FROM NIDEC TO APPLY 4M CHANGE.
   4M変更申請は、全て事前にNidec承認を得ること。
3. SUBMIT ICP DATA, MSDS, NO MATERIAL USE CERTIFICATE AND MILL TEST REPORT IF THERE IS A REQUEST.
   依頼があれば、ICPデータ、MSDS、不使用証明書、材料証明書を提示のこと。
4. MATERIAL FOR MAKING IS SHOWN BELOW.
   使用する材料について以下に示す。
   -
   - MATERIAL (材料) :TRC4507S
5. DISABLING FORCE OF BRAIDED CABLE :2daN MIN.
   編組線の引張強さは2daN以上のこと。
6. CROSS SECTION AREA OF BRAIDED CABLE :1.04mm².
   編組線の断面積は1.04mm²のこと。
7. THE NUMBER OF WIRES IN BRAIDED CABLE:208
   編組線中の素線数は208本のこと。
8. WEIGHT (重量) : (3.3g)
9. THERE MUST BE NEITHER CRACK NOR DAMAGE ON EXTERNALS.
   外観に割れ・欠け無きこと。

REV			
ISSUE		Fig.	
ECO No.	AECN095016		
APPROVED			
DESIGNED			
APPROVED	Y. FUJII	2010-07-16	
CHECKED	T. NAKATANI	2010-07-16	
DESIGNED	Y. MAKINO	2010-07-16	
DRAWN	M. TATEISHI	2010-07-16	

No.	PART No.	PART NAME	NOTE	Q'ty	UNIT	MARKS/MTL

TOLERANCE
UNLESS OTHERWISE SPECIFIED
LINEAR (長さ) : m (中級)
SHAFT (軸) : h13
HOLE (穴) : H13
SPEC (仕様書) : 5990000100
ANGULAR : ±0.5°
CORNER
OUTSIDE : C
INSIDE : R

TREAT. | MTL. 注記参照 SEE NOTES
MODEL NEHR0010-01
FINISH | PARTS カーボンブラシ CARBON BRUSH
UNIT mm | SCALE 2/1 | A2 | DWG. 製品図 PURCHASING SPECIFICATION
DWG. No. 516003370 0

1 OF 1 SHEETS

Nidec is a registered trademark or a trademark of Nidec Corporation in Japan, the United States and/or certain other countries.