



1 SINK / COUNTER SECTION A-A (NTS)

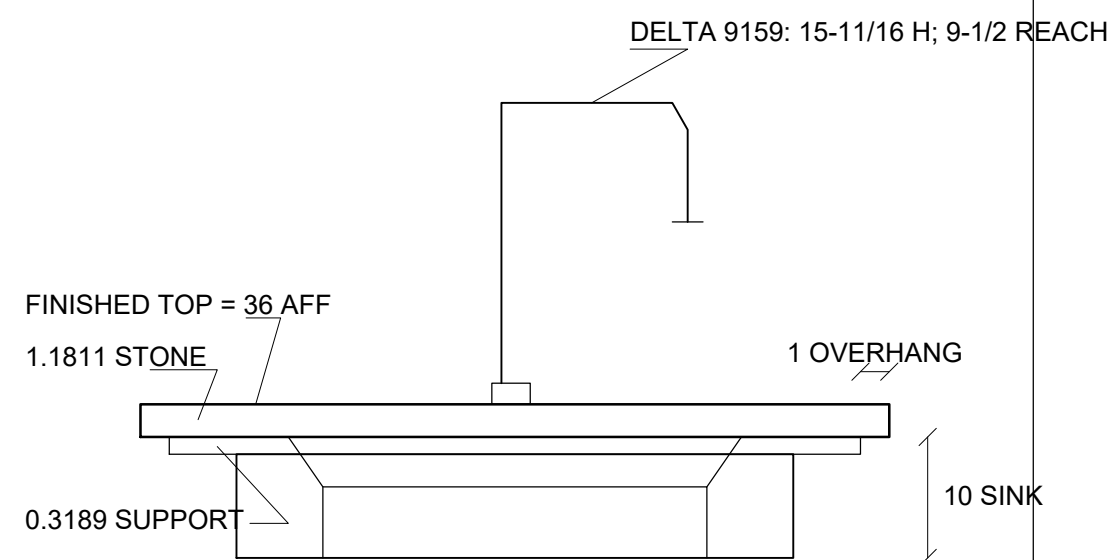


SR3018: 30 x 18 x 10; INDEPENDENT SUPPORT
CUTOUT, REVEAL AND FAUCET HOLE: PURCHASED TEMPLATES CONTROL

2 TYPICAL CABINET SECTION (NTS)

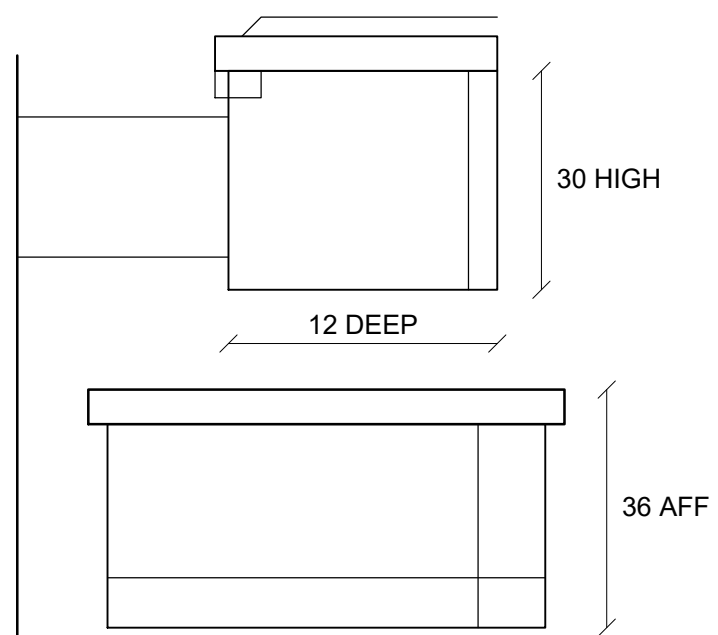


BASE 24 D; CARCASS TOP 34-1/2; TOE 4-1/2 H x 3 D; 1/4 BACK
COVE 3 H x 3/4 PROJ, CLOSED RETURN; 3/4 RAIL TO STUDS
B30: BACK IN 1/4 x 3/8 GROOVE, 3/4 FROM REAR; GLUED PLY PANEL

3 SHELF SUPPORT (NTS)

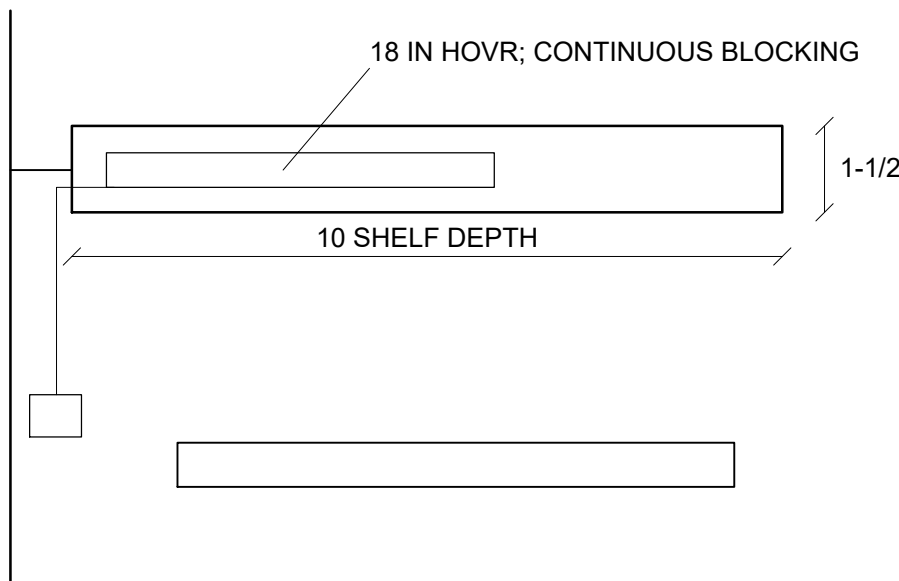


SHELF BOTTOMS: 60 / 74 AFF; NO UNDER-CABINET LIGHTING (R09)
FINAL ROUT / FASTENERS / LOAD RATING: CURRENT HOVR TEMPLATE

4 B30 FIVE-PIECE DOOR (NTS)

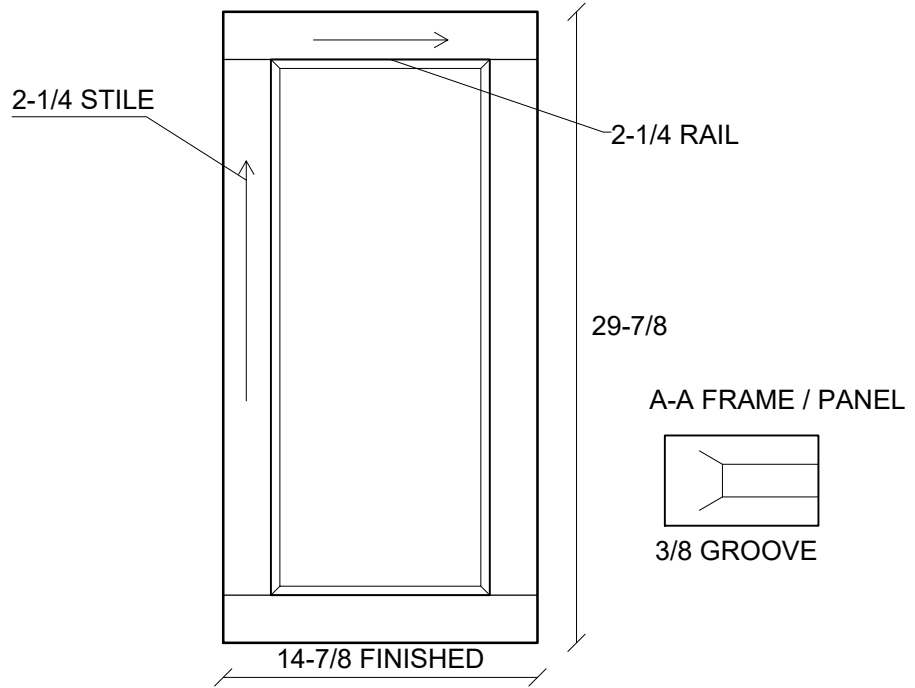


3/4 RIFT WHITE OAK FRAME; 1/4 RIFT OAK VENEER PANEL
GRAIN: STILES/PANEL VERTICAL; RAILS HORIZONTAL; 1/8 CTR GAP
BLUM 71B3550: K 3-5 MM, KEEP >=7 MM TO GROOVE

5 DRAWER / B12 CLEARANCE (NTS)

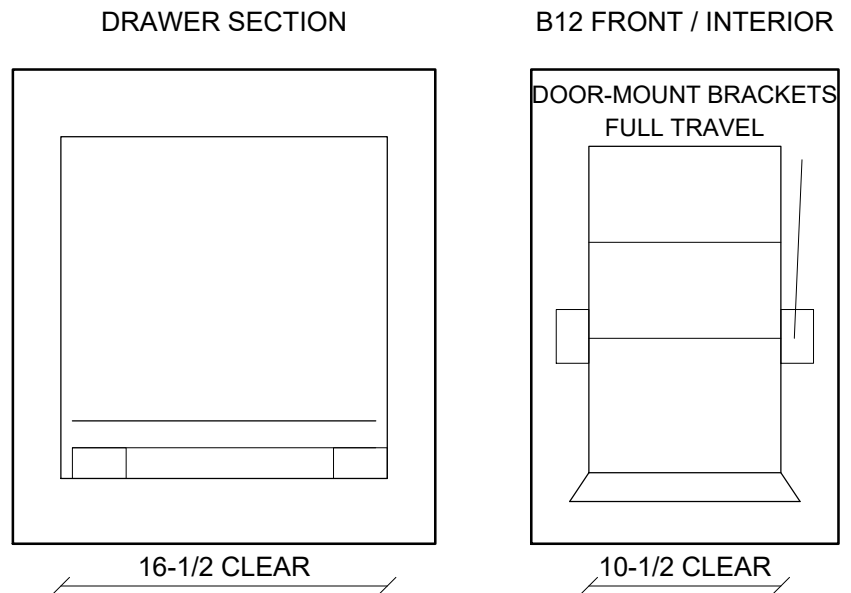

563H5330B: 21 IN; 21-15/16 MIN CLEAR DEPTH; 1/2 SIDES
T51.1901 LOCKS; BOTTOM RECESS / BORING PER BLUM
448UT-BCSC-8C: 8-3/4 W x 21-5/8 D x 25-1/2 H

6 WINDOW / BACKSPLASH (NTS)

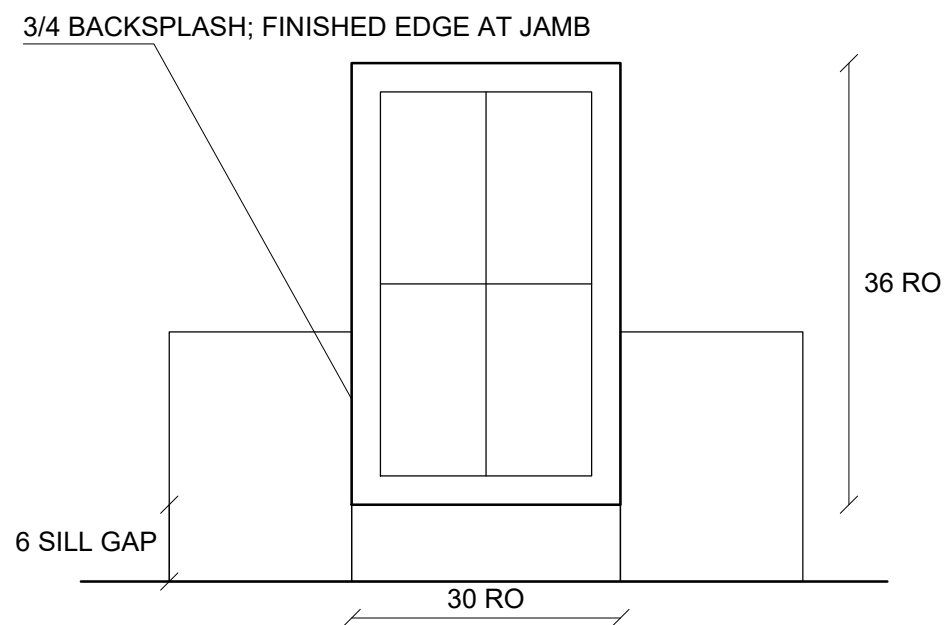

FIXED PICTURE UNIT, 2x2 GRILLES; SILL 42 / HEAD 78 AFF
ANDERSEN 100 SERIES 2630: UNIT 29-1/2 x 35-1/2; RO 30 x 36
FLUSH PAINTED JAMBS, NO CASING; ~3 IN EACH SIDE TO W18/W30