
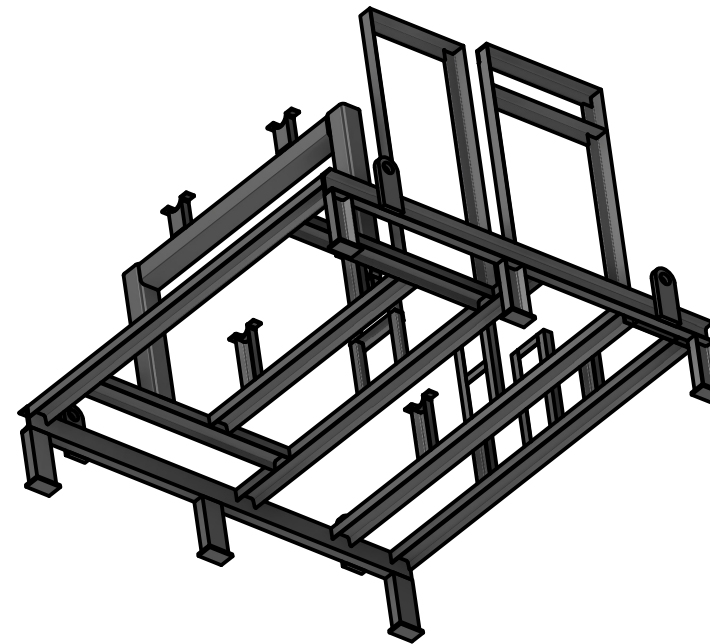
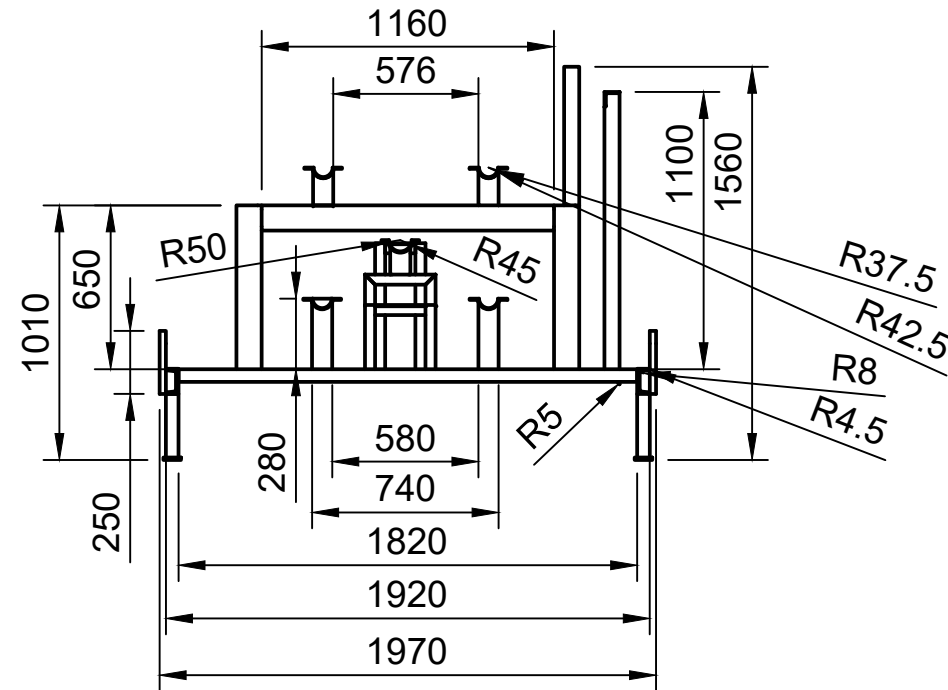
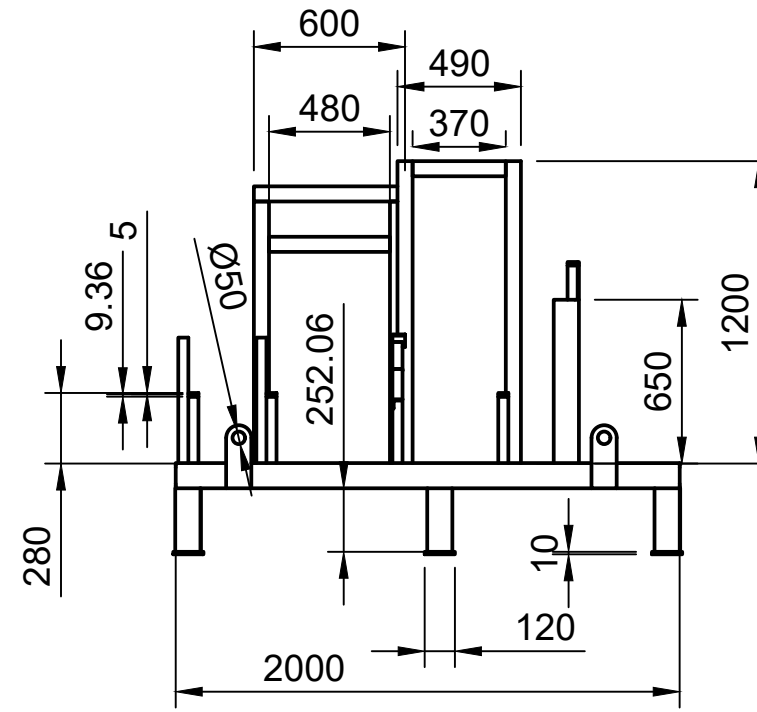


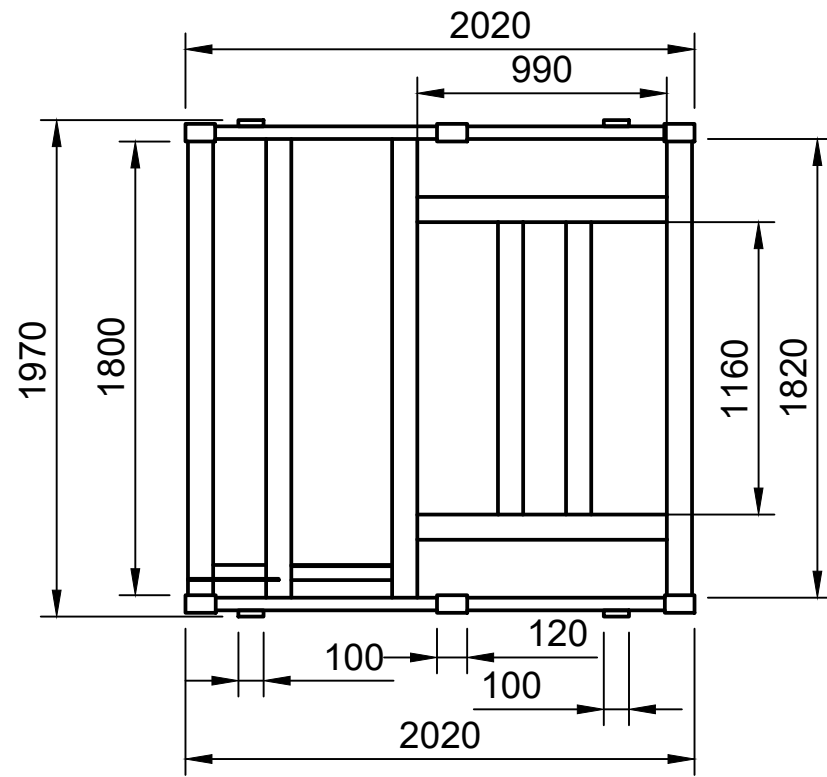

ITEM	DESCRIPTION	QTY	MATERIAL	REMARK
1.	Base Frame	1	A500 Gr.B	
2.	Leg	4	A500 Gr.B	
3.	Mount Plate	6	E250	
4.	Lift Lug	4	E250	
5.	Gusset	8	E250	

GENERAL INSTRUCTIONS

- ALL DIMENSION ARE IN MM UNLESS SPECIFIED OTHERWISE.
- ALL BUTT WELD SHALL BE 100% DP TESTED.
- FLANGE FACING FINISH SHALL BE 125-250 AARH.
- INSIDE SURFACE & WELDED SURFACE OF THE VENTURI WILL BE SMOOTHLY CLEAN BY VENDOR.
- DEGREE 37°30' SHALL BE PROVIDED FOR FULL PENETRATION WELD JOINTS.
- SURFACE FINISH: INSIDE AND OUTSIDE – ACID CLEANED.
- TRANSPORT: BLANK THE FLANGE OPENING WITH WOODEN SHEET / METAL SHEET.
- TOLERANCE AS PER STANDARD UNLESS OTHERWISE SPECIFIED.
- DO NOT SCALE THE DRAWING.
- REMOVE ALL SHARP CORNERS.
- MATERIAL DESCRIPTION SIZE PER ASTM/ASME AS APPLICABLE.

REFERENCE STANDARDS

- ASME BPVC Section IX - Welding procedure and welder qualification
- AWS D1.1/D1.1M - Structural steel welding code
- ASME B31.3 - Process piping
- ASTM A500 Grade B - Hollow structural sections
- ASTM A36 / IS 2062 E250 - Structural steel plates
- IS 4923 - Cold-formed steel hollow sections
- ISO 5817 - Acceptance levels for welded joints
- ISO 13920 - General fabrication tolerances for welded structures
- ISO 8501-1 - Surface preparation before coating
- ASME Y14.5 - Geometric dimensioning and tolerancing

 UNNIC LNG SOLUTIONS Cryogenic Engineering LNG Consultancy Maritime & Energy Solutions Office No. 150, 1st Floor, A Wing, Balaji Bhavan, Plot No. 42A, Sector 11, CBD Belapur, Navi Mumbai – 400614 M : +91 75066 77660 E : info@unniclcs.com W : www.unnicgroup.com	REV.	DESC.	BY	DATE	DRAWN BY	SS	TOLERANCES (Unless Specified) X ±1.0 mm X.X ±0.5 mm X.XX ±0.2 mm ANGULAR ±1° FABRICATION: ASME STANDARD	TITLE: BASE STRUCTURE				
	0	FINAL DRAFT	SS									
									DRAWING NO: LNG-BS-BS-006 REV.0			
												SHEET
									1 OF 1	1:1	mm	A3