计算机学院课程

计算机组成

MIPS体系结构概述

高小鹏

北京航空航天大学计算机学院
系统结构研究所

提纲

- 输入输出
- 异常/中断
- 协处理器

北京航空航天大学计算机学院
School of Computer Science and Engineering, Beihang University

---

Motivation for Input/Output

- I/O is how humans interact with computers
- I/O gives computers long-term memory.
- I/O lets computers do amazing things:

MIT Media Lab
"Sixth Sense"

- Computer without I/O like a car without wheels;
  great technology, but gets you nowhere

I/O Device Examples and Speeds

- I/O speeds: *7 orders of magnitude* between mouse and LAN

Device	Behavior	Partner	Data Rate (KB/s)
Keyboard	Input	Human	0.01
Mouse	Input	Human	0.02
Voice output	Output	Human	5.00
Floppy disk	Storage	Machine	50.00
Laser printer	Output	Human	100.00
Magnetic disk	Storage	Machine	10,000.00
Wireless network	Input or Output	Machine	10,000.00
Graphics display	Output	Human	30,000.00
Wired LAN network	Input or Output	Machine	125,000.00

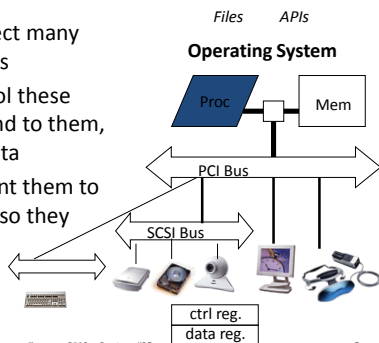- When discussing transfer rates, use SI prefixes (10^x)

What do we need for I/O to work?

1) A way to connect many types of devices
2) A way to control these devices, respond to them, and transfer data
3) A way to present them to user programs so they are useful

Files   APIs

Operating System

Proc   Mem

PCI Bus

SCSI Bus

ctrl reg.
data reg.

Instruction Set Architecture for I/O

- What must the processor do for I/O?
  - Input: reads a sequence of bytes
  - Output: writes a sequence of bytes
- Some processors have special input and output instructions
- Alternative model (used by MIPS):
  - Use loads for input, stores for output (in small pieces)
  - Called *Memory Mapped Input/Output*
  - A portion of the address space dedicated to communication paths to Input or Output devices (no memory there)
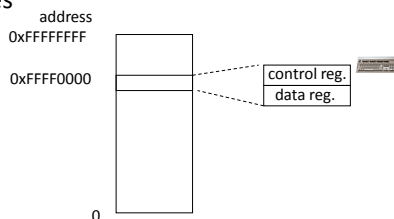
1

Memory Mapped I/O

- Certain addresses are not regular memory
- Instead, they correspond to registers in I/O devices

```
         address
      0xFFFFFFFF
                    ┌──────┐
                    │      │
      0xFFFF0000    │      │····    ┌──────────────┐
                    │      │····    │ control reg. │
                    │      │        │ data reg.    │
                    │      │        └──────────────┘
                    │      │
                    │      │
                    │      │
               0    └──────┘
```

7/31/2012   Summer 2012 -- Lecture #25   7

Processor-I/O Speed Mismatch

- 1 GHz microprocessor can execute 1 billion load or store instr/sec (4,000,000 KB/s data rate)
  - **Recall:** I/O devices data rates range from 0.01 KB/s to 125,000 KB/s
- *Input:* Device may not be ready to send data as fast as the processor loads it
  - Also, might be waiting for human to act
- *Output:* Device not be ready to accept data as fast as processor stores it
- *What can we do?*

7/31/2012   Summer 2012 -- Lecture #25   8

Processor Checks Status Before Acting

- Path to a device generally has 2 registers:
  - *Control Register* says it's OK to read/write (I/O ready)
  - *Data Register* contains data
1) Processor reads from control register in a loop, waiting for device to set *Ready bit* ($0 \rightarrow 1$)
2) Processor then loads from (input) or writes to (output) data register
   - Resets Ready bit of control register ($1 \rightarrow 0$)
- This process is called *"Polling"*

7/31/2012   Summer 2012 -- Lecture #25   9

I/O Example (Polling in MIPS)

- **Input:** Read from keyboard into $v0

```
            lui   $t0, 0xffff # ffff0000
Waitloop:   lw    $t1, 0($t0) # control reg
            andi  $t1,$t1,0x1
            beq   $t1,$zero, Waitloop
            lw    $v0, 4($t0) # data reg
```

- **Output:** Write to display from $a0

```
            lui   $t0, 0xffff # ffff0000
Waitloop:   lw    $t1, 8($t0) # control reg
            andi  $t1,$t1,0x1
            beq   $t1,$zero, Waitloop
            sw    $a0,12($t0) # data reg
```

- "Ready" bit is from processor's point of view!

7/31/2012   Summer 2012 -- Lecture #25   10

Cost of Polling?

- Processor specs: 1 GHz clock, 400 clock cycles for a polling operation (call polling routine, accessing the device, and returning)
- Determine % of processor time for polling:
  - **Mouse:** Polled 30 times/sec so as not to miss user movement
  - **Floppy disk:** Transferred data in 2-Byte units with data rate of 50 KB/sec. No data transfer can be missed.
  - **Hard disk:** Transfers data in 16-Byte chunks and can transfer at 16 MB/second. Again, no transfer can be missed.

7/31/2012   Summer 2012 -- Lecture #25   11

% Processor time to poll

- Mouse polling:
  - *Time taken:* 30 [polls/s] × 400 [clocks/poll] = 12K [clocks/s]
  - *% Time:* 1.2×10^4 [clocks/s] / 10^9 [clocks/s] = 0.0012%
  - Polling mouse little impact on processor
- Disk polling:
  - *Freq:* 16 [MB/s] / 16 [B/poll] = 1M [polls/s]
  - *Time taken:* 1M [polls/s] × 400 [clocks/poll] = 400M [clocks/s]
  - *% Time:* 4×10^8 [clocks/s] / 10^9 [clocks/s] = 40%
  - Unacceptable!
- **Problems:** polling, accessing small chunks

7/31/2012   Summer 2012 -- Lecture #25   12

Alternatives to Polling?

- Wasteful to have processor spend most of its time "spin-waiting" for I/O to be ready
- Would like an unplanned procedure call that would be invoked only when I/O device is ready
- **Solution:** Use *exception* mechanism to help trigger I/O, then *interrupt* program when I/O is done with data transfer
  - This method is discussed next

北京航空航天大学计算机学院
School of Computer Science and Engineering, Beihang University

---

Exceptions and Interrupts

- "Unexpected" events requiring change in flow of control
  - Different ISAs use the terms differently
- *Exception*
  - Arises within the CPU
    (e.g. undefined opcode, overflow, syscall, TLB Miss)
- *Interrupt*
  - From an external I/O controller
- Dealing with these without sacrificing performance is difficult!

Handling Exceptions (1/2)

- In MIPS, exceptions managed by a System Control Coprocessor (CP0)
- Save PC of offending (or interrupted) instruction
  - In MIPS: save in special register called *Exception Program Counter* (*EPC*)
- Save indication of the problem
  - In MIPS: saved in special register called *Cause* register
  - In simple implementation, might only need 1-bit (0 for undefined opcode, 1 for overflow)
- Jump to *exception handler code* at address 0x80000180

Handling Exceptions (2/2)

- Operating system is also notified
  - Can kill program (e.g. segfault)
  - For I/O device request or syscall, often switch to another process in meantime
    - This is what happens on a TLB misses and page faults

Exception Properties

- Re-startable exceptions
  - Pipeline can flush the instruction
  - Handler executes, then returns to the instruction
    - Re-fetched and executed from scratch
- PC+4 saved in EPC register
  - Identifies causing instruction
  - PC+4 because it is the available signal in a pipelined implementation
    - Handler must adjust this value to get right address

Handler Actions

- Read Cause register, and transfer to relevant handler
- OS determines action required:
  - If restartable exception, take corrective action and then use EPC to return to program
  - Otherwise, terminate program and report error using EPC, Cause register, etc.
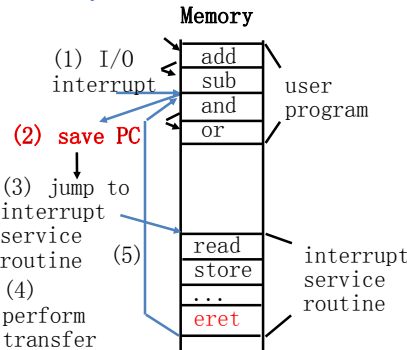   (e.g. our best friend the segfault)

I/O Interrupt

- An I/O interrupt is like an exception except:
  - An I/O interrupt is "asynchronous"
  - More information needs to be conveyed
- "Asynchronous" with respect to instruction execution:
  - I/O interrupt is not associated with any instruction, but it can happen in the middle of any given instruction
  - *I/O interrupt does not prevent any instruction from running to completion*

Interrupt-Driven Data Transfer

```
                      Memory
(1) I/O           ┌─────────┐
interrupt         │  add    │
                  │  sub    │  user
            (2)   │  and    │  program
         save PC  │  or     │
                  ├─────────┤
(3) jump to       │         │
interrupt         │         │
service     (5)   │  read   │
routine           │  store  │  interrupt
(4)               │  ...    │  service
perform           │  eret   │  routine
transfer          └─────────┘
```

协处理器0（CP0）

- 4个寄存器：SR、Cause、EPC、PRId
  - 阅读《See MIPS Run Linux》第3章
  - 无关寄存器及无关位可以不阅读
- 理解要点：
  - SR：用于对系统进行控制
    - 指令可读可写
  - Cause：指令读取，硬件控制写入
    - IP[7:2]：对应外部6个中断源
    - ExcCode[6:2]：异常/中断类型编码值
  - EPC：用于保存异常/中断发生时的PC
    - 保存PC：硬件控制写入
    - 指令读取：中断服务程序
  - PRId：处理器ID
    - 可以用于实现个性的编码☺

寄存器号	寄存器
12	SR
13	CAUSE
14	EPC
15	PrID

北京航空航天大学计算机学院

EPC

- EPC：保存中断/异常时的PC
  - 以便从中断/异常服务程序返回至被中断指令
- ERET：中断/异常服务程序返回指令

	31　　　26	25　　　　21 20　　16 15　　11 10　　6	5　　0
编码	COP0 010000	80000 1000 0000 0000 0000 0000	eret 011000
	6	20	6
格式	eret		
描述	eret将保存在CP0的EPC寄存器中的现场(被中断指令的下一条地址)写入PC，从而实现从中断、异常或指令执行错误的处理程序中返回。		
操作	PC ← CP0[epc]		
示例	eret		
其他	当程序被硬件中断、指令执行异常(如除0、算数溢出)时，PC+4将被保存在EPC中。		

北京航空航天大学计算机学院
School of Computer Science and Engineering, Beihang University

CAUSE寄存器

- IP[7:2]：6位待决的中断位，分别对应6个外部中断
  - 记录当前哪些硬件中断正在有效
  - 1-有中断；0-无中断
- ExcCode[6:2]：异常编码，记录当前发生的是什么异常
  - 共计32种
  - 本课程要求表中3种

ExcCode	助记符	描述
0	Int	中断
10	RI	不识别(非法)指令
12	Ov	算数指令导致的异常(如add)

```
31  30 29 28 27   26 25 24 23 22 21  16 15      10 9     8  6      2 1 0
┌──┬──┬──┬──┬──┬──────────┬──┬──┬──┬────────┬──────┬────────┬──┐
│BD│TI│CE│DC│PCI│    0    │IV│WP│ 0 │  IP7-2  │ IP1-0 │ ExcCode │ 0│
└──┴──┴──┴──┴──┴──────────┴──┴──┴──┴────────┴──────┴────────┴──┘
    In EIC (external int ctrl) mode       RIPL
```

北京航空航天大学计算机学院
School of Computer Science and Engineering, Beihang University

4

SR寄存器

- IM[7:2]：6位中断屏蔽位，分别对应6个外部中断
  - 1-允许中断，0-禁止中断
- IE：全局中断使能
  - 1-允许中断；0-禁止中断
- EXL：异常级
  - 1-进入异常，不允许再中断；0-允许中断
  - 重入需要OS的配合，特别是堆栈

31	28 27	26	25	24	23	22	21	20	19	18 17	16	15	10	9	8	7	6	5	4	3	2	1	0
CU3-0	RP	FR	RE	MX	PX	BEV	TS	SR	NMI	0	Impl	IM7-2		IP1-0	KX	SX	UX	UM	R0	ERL	EXL	IE
							in EIC (external int ctrl) mode					IPL					KSU					

Slide 26

Exception Handling 5-Stage Pipeline

PC address Exception — Illegal Opcode — Overflow — Data address Exceptions

→ Asynchronous Interrupts

- How to handle multiple simultaneous exceptions in different pipeline stages?
- How and where to handle external asynchronous interrupts?

异常：本课程只要求实现非法指令和溢出

February 2, 2012 — CS152, Spring 2012 — 26

Exception Handling 5-Stage Pipeline
(高小鹏修改)

Commit Point

PC address Exception — Illegal Opcode — Overflow — Data address Exceptions

Select Handler PC — 清除 IF/ID — 清除 ID/EX — 清除 EX/MEM — 清除 MEM/WB

Hardware Interrupts — EPC — Cause

February 2, 2012 — CS152, Spring 2012 — 27

Exception Handling 5-Stage Pipeline

- Hold exception flags in pipeline until commit point (M stage)

- Exceptions in earlier pipe stages override later exceptions *for a given instruction*

- Inject external interrupts at commit point (override others)

- If exception at commit: update Cause and EPC registers, kill all stages, inject handler PC into fetch stage

February 2, 2012 — CS152, Spring 2012 — 28

硬件实现：传递异常

- 当本级有异常时，则传递本级异常编码
- 硬件中断的优先级高于异常

本级ExcCode ——→ 异常选择
前级ExcCode ——→ 后级ExcCode

PC address Exception — Illegal Opcode — Overflow — Data address Exceptions — Hardware Interrupts — EPC — Cause

---

硬件实现：修改PC

- PC需要增加：异常处理程序的地址
  - 系统复位时输出：0xBFC0_0000
  - 硬件中断时输出：0xBFC0_0400
  - 其他异常时输出：0xBFC0_0380

0xBFC0_0000 — 0
0xBFC0_0400 — 1
0xBFC0_3800 — 2
其他各种输入

5

软件实现：中断服务程序

- 框架结构：保存现场、中断处理、恢复现场、中断返回
- 1、保存现场
  - 将所有寄存器都保存在堆栈中
- 2、中断处理
  - 读取特殊寄存器了解哪个硬件中断发生
  - 执行对应的处理策略（例如读写设备寄存器、存储器等）
- 3、恢复现场
  - 从堆栈中恢复所有寄存器
- 4、中断返回
  - 执行eret指令

> 1、3、4：通用
> 2：针对特定设备

北京航空航天大学计算机学院
School of Computer Science and Engineering, Beihang University
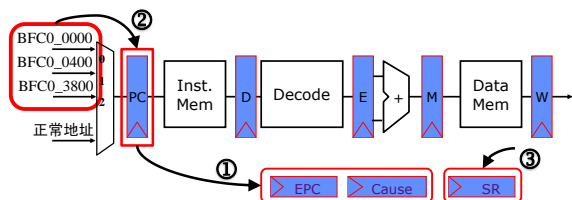

中断响应机制：检测异常与中断(1)

- 每条指令的W阶段检测异常与中断
  - 最终异常：流水过来的前级异常
  - 是否有中断
- 中断检测时需要判断是否中断允许位
  - 解决方法：用HWINT/IM/IE/EXL产生中断请求
  - `assign IntReq = |(HWInt[7:2] & IM[7:2]) & IE & !EXL ;`
- 注意：中断优先级高于异常
  - Q：怎么实现呢？
  - A：清除各级指令时，先判断中断再判断异常流水标志位

北京航空航天大学计算机学院
School of Computer Science and Engineering, Beihang University

---

中断响应机制：控制器(2)

- 处理：保存PC/跳转/关中断
- ①保存：将PC和ExcCode保存在EPC和Cause中
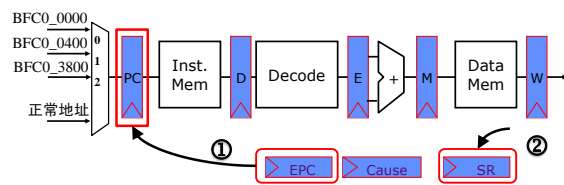 - 注意：PC存储的是PC+4
- ②跳转：产生中断处理程序入口地址并写入PC
- ③关中断：EXL置位，防止再次进入

> 实现要点：
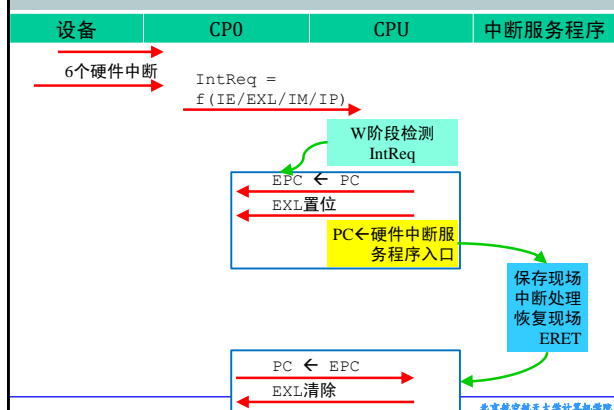> ①②③在同一周期完成
> 实现技巧：
> PC/EPC/ExcCode/EXL
> 写使能同时产生

中断响应机制：ERET指令(3)

- 恢复PC，开中断
  - ①恢复PC：将EPC写入EPC
  - ②开中断：清除EXL，允许再次产生

> 实现要点：
> ①②在同一周期完成
> 实现技巧：
> PC写使能/EXL清除同时产生

北京航空航天大学计算机学院
School of Computer Science and Engineering, Beihang University

---

中断响应机制分析：软硬件协同

北京航空航天大学计算机学院

Interrupt-Driven I/O Example (1/2)

- Assume the following system properties:
  - 500 clock cycle overhead for each transfer, including interrupt
  - Disk throughput of 16 MB/s
  - Disk interrupts after transferring 16 B
  - Processor running at 1 GHz
- If disk is active 5% of program, what % of processor is consumed by the disk?
  - 5% × 16 [MB/s] / 16 [B/inter] = 50,000 [inter/s]
  - 50,000 [inter/s] × 500 [clocks/inter] = $2.5×10^7$ [clocks/s]
  - $2.5×10^7$ [clocks/s] / 10^9 [clock/s] = **2.5% busy**

Interrupt-Driven I/O Example (2/2)

- 2.5% busy (interrupts) much better than 40% (polling)
- **Real Solution:** *Direct Memory Access (DMA)* mechanism
  - Device controller transfers data directly to/from memory without involving the processor
  - Only interrupts once per page (large!) once transfer is done

---

提纲

- 输入输出
- 异常/中断
- 协处理器

北京航空航天大学计算机学院
School of Computer Science and Engineering, Beihang University

---

协处理器指令及用途

- 指令：MFC0、MTC0
  - 不能直接修改CP0寄存器，必须借助通用寄存器
- MFC0：读取CP0寄存器至通用寄存器
  - SR：获取处理器的控制信息
  - Cause：获取处理器当前所处的状态
  - EPC：获取被异常/中断的指令地址
  - PRId：读取处理器ID（可以读取你的个性签名☺）
- MTC0：通用寄存器值写入CP0寄存器
  - SR：对处理器进行控制，例如关闭中断
  - EPC：操作系统中将用于多任务切换

北京航空航天大学计算机学院

设计CP0：模块接口

信号名	方向	用途	产生来源及机制
A1[4:0]	I	读CP0寄存器编号	执行MFC0指令时产生
A2[4:0]	I	写CP0寄存器编号	执行MTC0指令时产生
DIn[31:0]	I	CP0寄存器的写入数据	执行MTC0指令时产生 数据来自GPR
PC[31:2]	I	中断/异常时的PC	PC
ExcCode[6:2]	I	中断/异常的类型	异常功能部件
HWInt[5:0]	I	6个设备中断	外部硬件设备（如鼠标、键盘）
We	I	CP0寄存器写使能	执行MTC0指令时产生
EXLSet	I	用于置位SR的EXL(EXL为1)	流水线在W阶段产生
EXLClr	I	用于清除SR的EXL(EXL为0)	执行ERET指令时产生
clk	I	时钟	
rst	I	复位	
IntReq	O	中断请求，输出至CPU控制器	是HWInt/IM/EXL/IM的函数
EPC[31:2]	O	EPC寄存器输出至NPC	
DOut[31:0]	O	CP0寄存器的输出数据	执行 MFC0 指令时产生，输出数据至 GPR

北京航空航天大学计算机学院

设计CP0：SR

- 由于无用位较多，因此只定义有用位
  - `reg [15:10] im ;`
  - `reg exl, ie ;`
- SR整体表示为：`{16'b0, im, 8'b0, exl, ie}`
- im，ie的行为很简单

```
if (当Wen有效并且Sel为对应的寄存器编号)
    {im, exl, ie} <= {DIn[15:10],
                      DIn[1], DIn[0]} ;
```

`reg [5:0] im`与`reg [15:10] im` 是等价的，但后者编码风格更好

北京航空航天大学计算机学院

设计CP0：SR

- exl要复杂一些：除了类似im/ie的行为外，还必须有置位和清除的功能。以置位为例：

```
if (EXLSet)
    exl <= 1'b1 ;
```

北京航空航天大学计算机学院

7

设计CP0：Cause

- Cause：只需定义6位寄存器，不断的锁存外部6个中断(HWInt[5:0])
  - `reg [15:10] hwint_pend ;`
- Cause整体表示为：
  - `{16'b0, hwint_pend, 10'b0}`

设计CP0：EPC

- 定义30位寄存器
  - `reg [32:2] epc;`
- 为什么不需要32位？

设计CP0：PRId

- 用于对公司/指令集版本等进行标识
  - Intel处理器也有ID，CPU-Z就可以读取

31 24	23 16	15 8	7 0
Company Options	Company ID	Processor ID	Revision

- 目前可以任意选则用一个4字节的编码值，如
  - 0x1234_5678

设计CP0：输出CP0寄存器

- 除了SR/Cause/EPC/PRId外，一律输出0。
- 可以设计一个5选1的MUX。
- 也可以用行为描述，样例代码：

```
assign DOut = (Sel==12) ? {16'b0, im, 8'b0, exl, ie} :
                          XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX :
                          XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX :
                          XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX :
                          32'b0 ;
```