


N 14°10.298'
 E 145°14.391'

123.6 L

GND CON

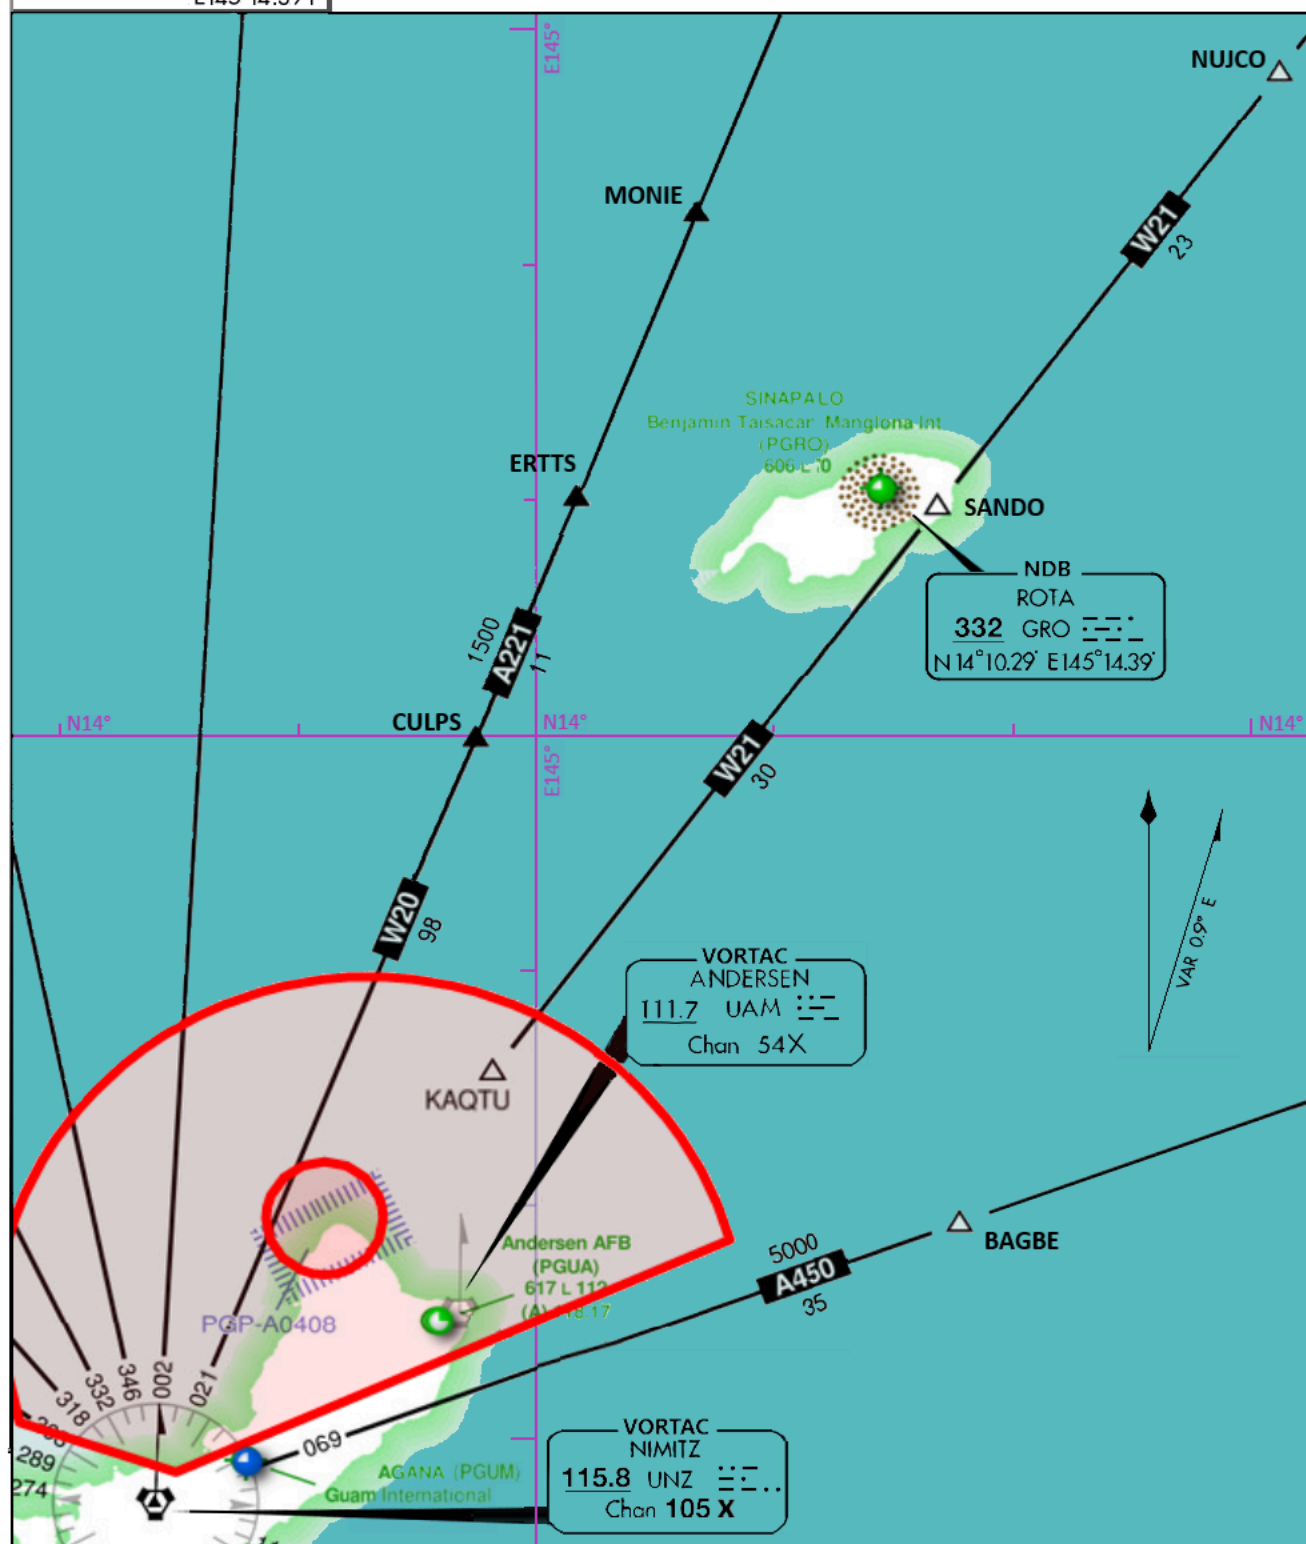

NAV. POINTS	COORDINATES	
MONIE	N 14°22.17'	E 145°06.74'
NUJCO	N 14°28.15'	E 145°31.13'
ERTTS	N 14°10.12'	E 145°01.71'
SANDO	N 14°09.72'	E 145°16.80'
CULPS	N 13°59.86'	E 144°57.47'
KAQTU	N 13°45.66'	E 144°58.17'
BAGBE	N 13°39.22'	E 145°17.73'



GUAM CENTER
120.5 263.0
ROTA TOWER
123.6 250.0
GND CON

CTAF

D


145°14'E

145°15'E


FIELD
ELEV
568



JULY 2016
ANNUAL RATE OF CHANGE
0.9° W

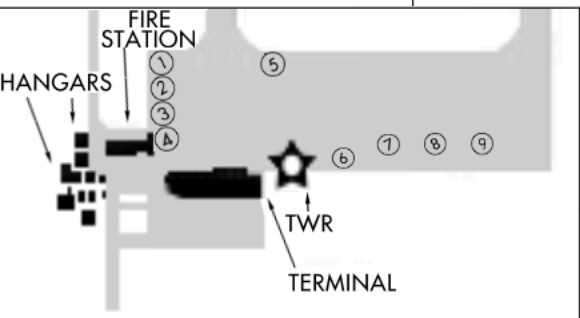

PARKING STAND POSITIONS		
STAND NO.	COORDINATES	
1	N 14°10.36'	E 145°14.62'
2	N 14°10.35'	E 145°14.62'
3	N 14°10.33'	E 145°14.62'
4	N 14°10.32'	E 145°14.62'
5	N 14°10.36'	E 145°14.70'
6	N 14°10.32'	E 145°14.72'
7	N 14°10.32'	E 145°14.75'
8	N 14°10.32'	E 145°14.78'
9	N 14°10.32'	E 145°14.81'

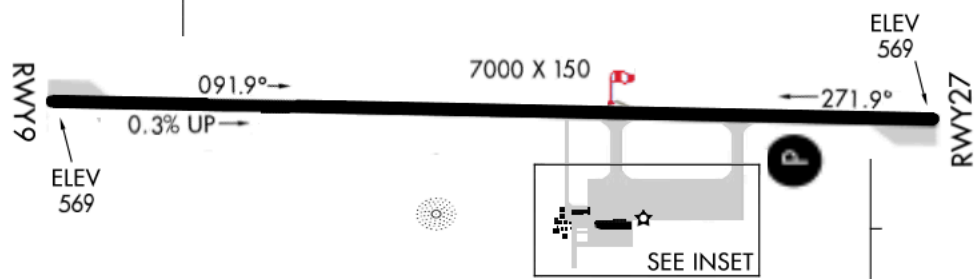

09-27
PCN 67 F/A/X/T
S-87, D-175, D-350, 2D/2D2-690

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.

145°14'E

145°15'E

14°10'N

ROTA ISLAND, CQ

NDB GRO	APP CRS	Rwy Idg	7000
332	105°	TDZE	569
N 14°10.298' E 145°14.391'		Apt Elev	568






NDB RWY 9

BENJAMIN TAISACAN MANGLONA INTL (GRO)(PGRO)

⚠ When local altimeter setting not received, use Andersen AFB altimeter setting and increase all MDA 320 feet. Circling NA south of Rwy 9-27.

MISSED APPROACH: Climb to 2200 then climbing left turn to 3100 direct GRO NDB and hold.

GUAM CENTER 120.5 263.0	ROTA TOWER 250.0	CTAF 123.6 L	GND CON
-----------------------------------	----------------------------	-------------------------------	---------

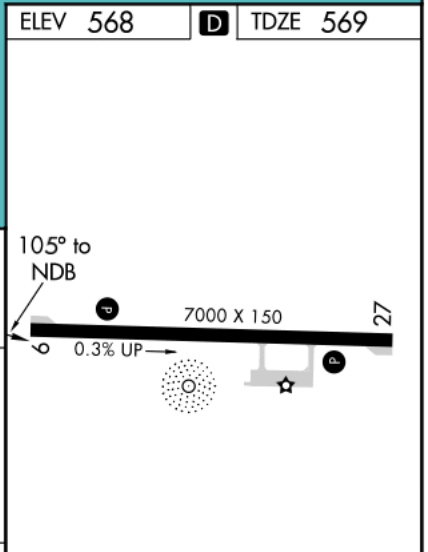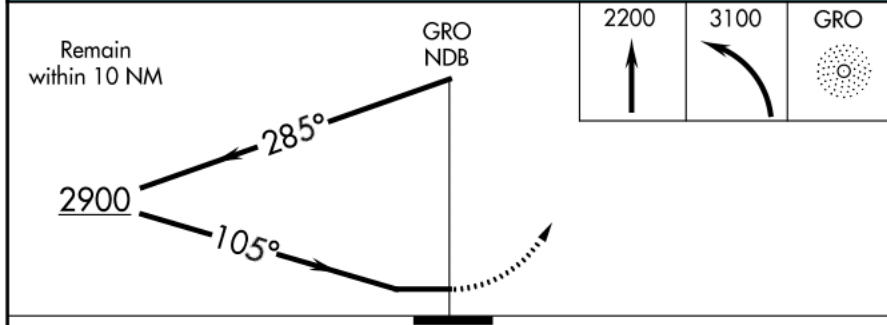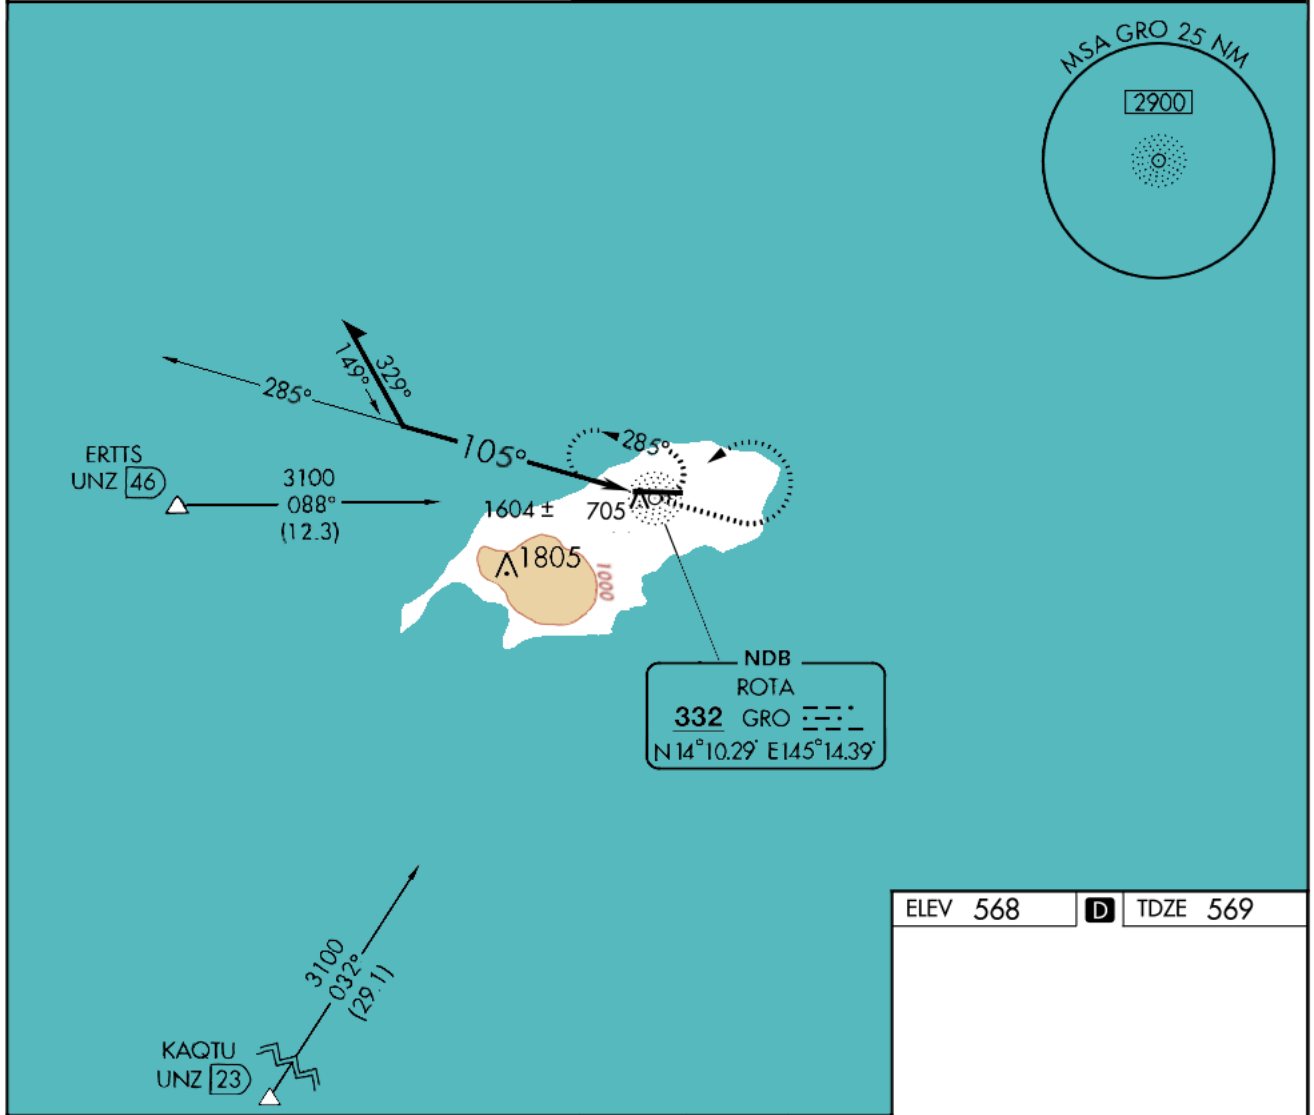

CATEGORY	A	B	C	D
S-9	1800-1¼ 1206 (1200-1¼)	1800-1½ 1206 (1200-1½)	1800-3	1206 (1200-3)
C CIRCLING	1800-1¼ 1193 (1200-1¼)	1800-1½ 1193 (1200-1½)	1800-3	1193 (1200-3)

REIL Rwy 9 **L**
MIRL Rwy 9-27 **L**

ROTA ISLAND, CQ

NDB GRO	APP CRS	Rwy Idg	7000
332	261°	TDZE	569
N 14°10.298'		Apt Elev	568
E 145°14.391'			






NDB RWY 27

BENJAMIN TAISACAN MANGLONA INTL (GRO)(PGRO)

⚠ When local altimeter setting not received, use Andersen AFB altimeter setting and increase all MDA 320 feet; increase S-27 Cat B visibility ¼ mile, Cat C, D visibility 1⅛ mile, Circling Cat A, B visibility ¼ mile, Cat C 1 mile, Cat D ¾ mile. Circling NA south of Rwy 9-27.

MISSED APPROACH: Climbing right turn to 2000 on heading 360° then continue climbing right turn to 3100 direct GRO NDB and hold.

GUAM CENTER 120.5 263.0	ROTA TOWER 250.0	CTAF 123.6	GND CON
-----------------------------------	----------------------------	----------------------	---------

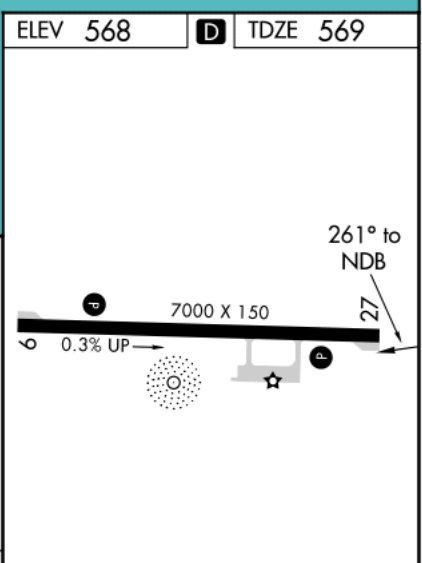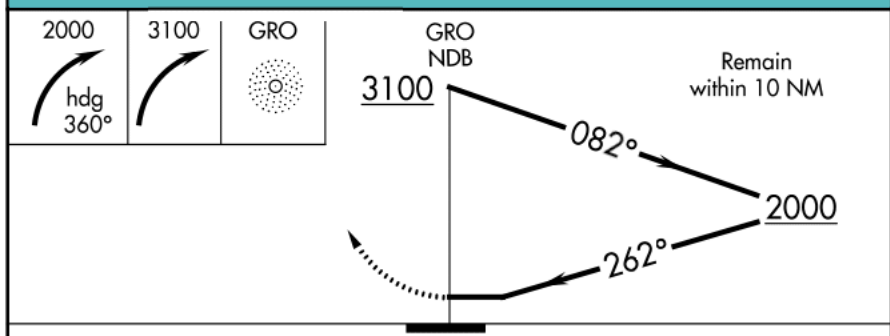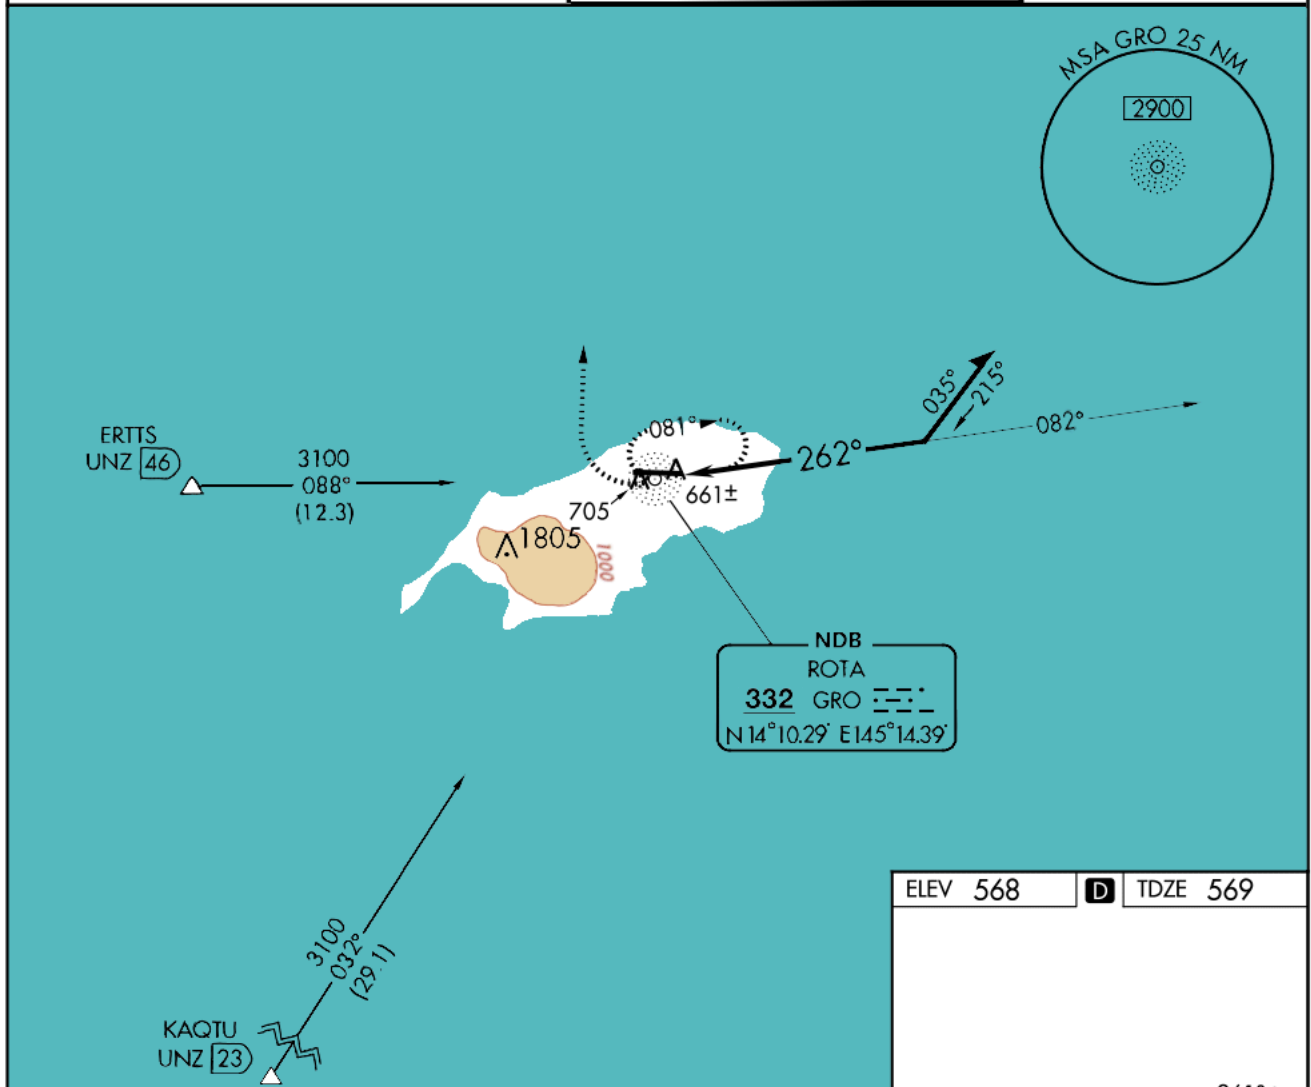

CATEGORY	A	B	C	D
S-27	1120-1 513 (600-1)		1120-1⅜ 513 (600-1⅜)	
C CIRCLING	1120-1 513 (600-1)		1120-1½ 513 (600-1½)	1160-2 553 (600-2)

REIL Rwy 9 **1**
MIRL Rwy 9-27 **1**

ROTA ISLAND, CQ

APP CRS	Rwy Idg	7000
094°	TDZE	569
N14°10.480'	Apt Elev	568
E145°13.877'		




RNAV (GPS) RWY 9

BENJAMIN TAISACAN MANGLONA INTL (GRO)(PGRO)

⚠ Circling NA south of Rwy 9-27. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Andersen AFB altimeter setting and increase all MDA 320 feet, increase LNAV Cat C, D visibility 7/8 mile, Circling Cat C, D visibility 3/4 mile. VDP NA when using Andersen AFB altimeter setting.


MISSED APPROACH: Climb to 3000 direct CEPOS and on track 088° to TOXPA and hold.

GUAM CENTER 120.5 263.0	ROTA TOWER 250.0	CTAF 123.6	GND CON
----------------------------	---------------------	---------------	---------

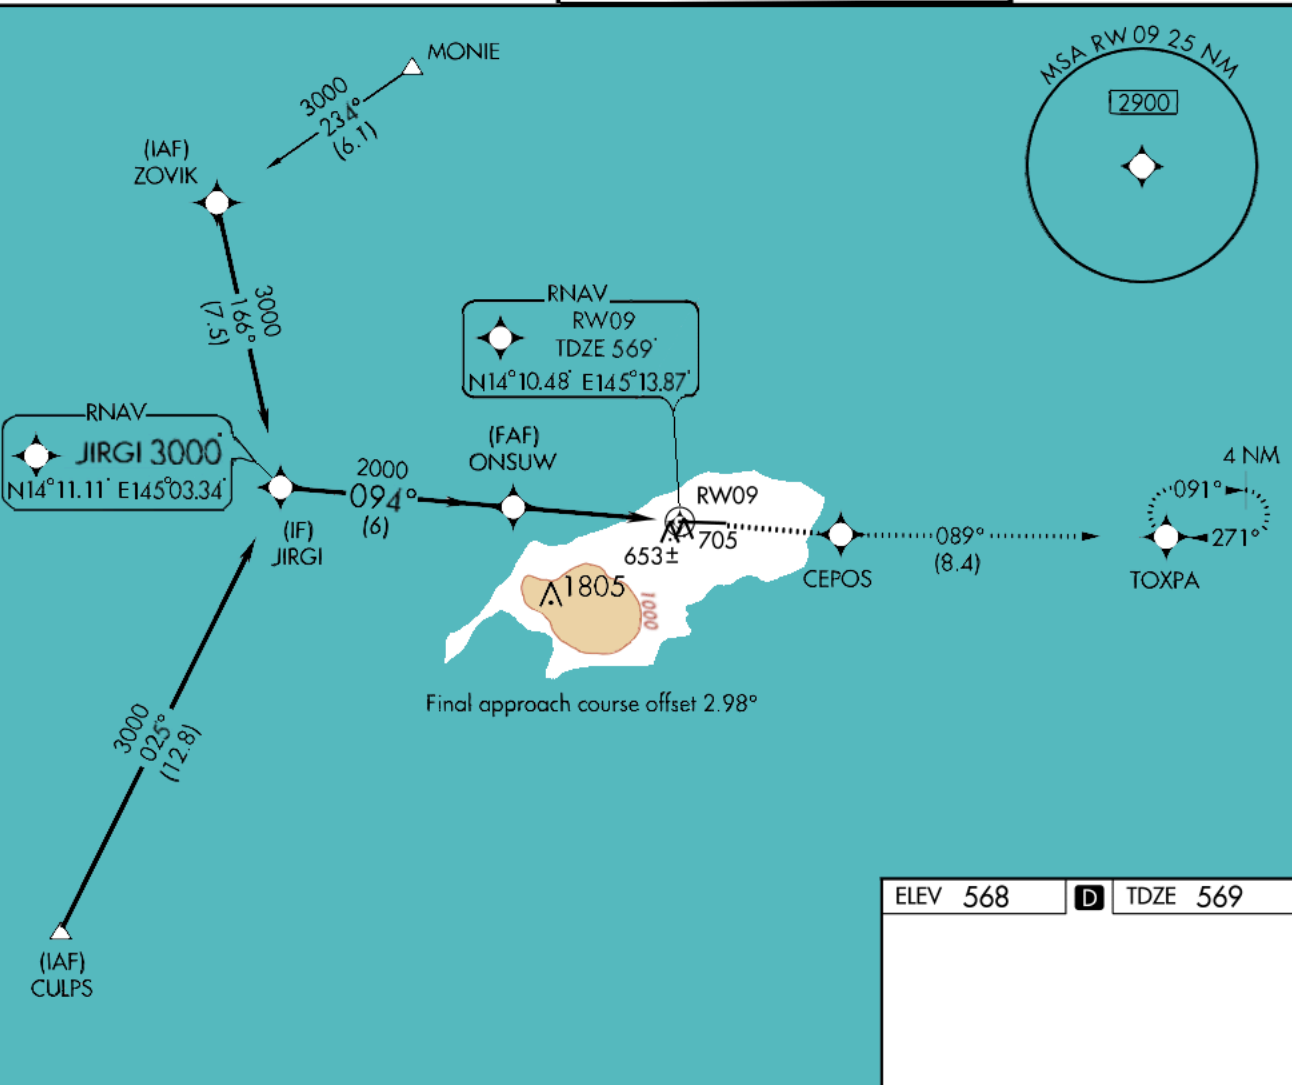

ELEV 568	D	TDZE 569
----------	---	----------

	JIRGI 10.3 NM to RW09	ONSUW 4.3 NM to RW09	CEPOS	tr 088°	TOXPA
3000	094°	2000	1.2 NM to RW09		
	6 NM	3.1 NM	1.2		
CATEGORY	A	B	C	D	
LNAV MDA	1000-1	406 (400-1)	1000-1 1/8	406 (400-1 1/8)	
CIRCLING	1000-1 393 (400-1)	1060-1 453 (500-1)	1060-1 1/2 453 (500-1 1/2)	1160-2 553 (600-2)	

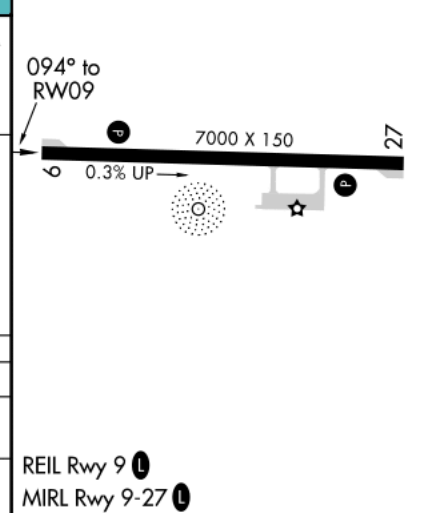

APP CRS 271°	Rwy Idg	7000
N14°10.444'	TDZE	569
E145°15.055'	Apt Elev	568



RNAV (GPS) RWY 27
N MANGLONA INTL (GRO)(PGRO)

T Circling NA south of Rwy 9-27. When local altimeter setting not received, use Andersen AFB altimeter setting and increase all MDA 320 feet, increase LNAV Cat B visibility $\frac{1}{4}$ mile, Cat C visibility $1\frac{1}{8}$ mile, Cat D visibility 1 mile, Circling Cat C visibility 1 mile Cat D visibility $\frac{3}{4}$ mile. DME/DME RNP -0.3 NA.


MISSED APPROACH: Climb to 1200 then climbing right turn to 3000 direct EPCAX and hold.

GUAM CENTER
120.5 263.0



ROTA TOWER
250.0

CTAF
123.6 L

GND CON

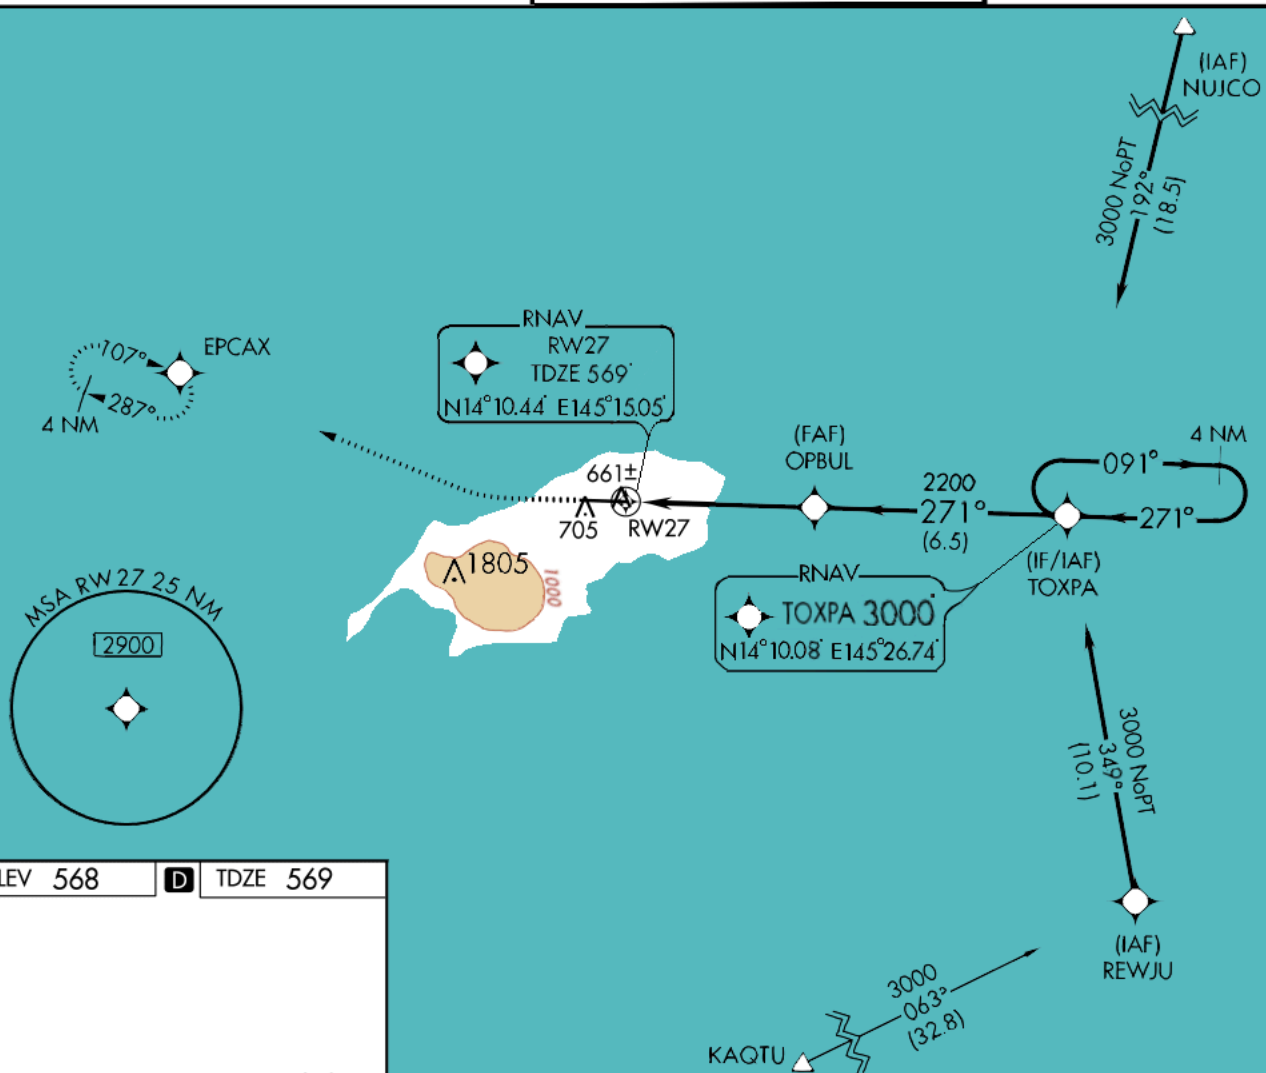

ELEV 568	D	TDZE 569
----------	----------	----------

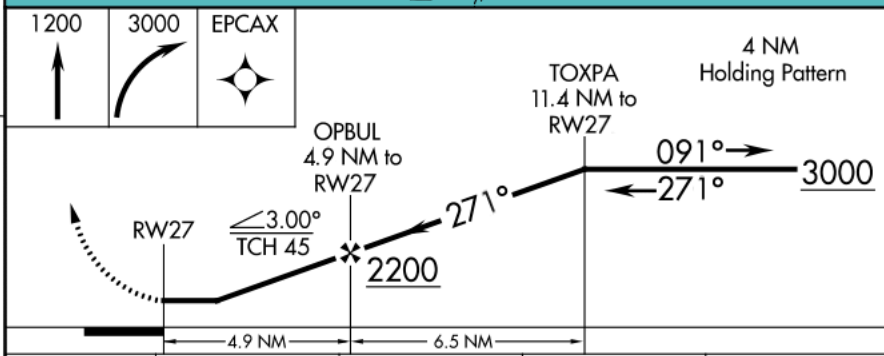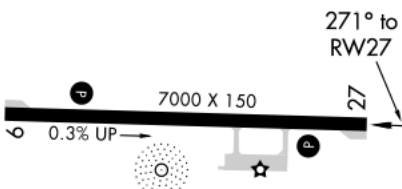

CATEGORY	A	B	C	D
INAV MDA	1020-1 413 (500-1)	1040-1 433 (500-1)	1100-1 ³ / ₈ 493 (500-1 ³ / ₈)	1140-1 ¹ / ₂ 533 (600-1 ¹ / ₂)
 CIRCLING	1020-1 413 (500-1)	1060-1 453 (500-1)	1100-1 ¹ / ₂ 493 (500-1 ¹ / ₂)	1160-2 553 (600-2)

REIL Rwy 9 **L**
MIRL Rwy 9-27 **L**