
Chapter 9: Virtual Memory






Chapter 9: Virtual Memory

- Background
- Demand Paging
- Page Replacement

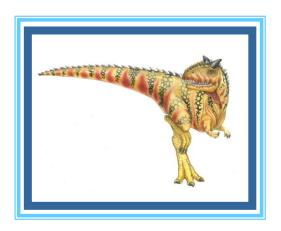



Objectives

- To describe the benefits of a virtual memory system
- □ To explain the concepts of demand paging, page-replacement algorithms, and allocation of page frames
- To discuss the principle of the working-set model
- To examine the relationship between shared memory and memory-mapped files
- To explore how kernel memory is managed





Background

- Code needs to be in memory to execute, but entire program rarely used
 - Error code, unusual routines, large data structures
- Entire program code not needed at same time
- Consider ability to execute partially-loaded program
 - Program no longer constrained by limits of physical memory
 - Each program takes less memory while running -> more programs run at the same time
 - Increased CPU utilization and throughput with no increase in response time or turnaround time
 - Less I/O needed to load or swap programs into memory -> each user program runs faster





Background (Cont.)

- Virtual memory separation of user logical memory from physical memory
 - Only part of the program needs to be in memory for execution
 - Logical address space can therefore be much larger than physical address space
 - Allows address spaces to be shared by several processes
 - Allows for more efficient process creation
 - More programs running concurrently
 - Less I/O needed to load or swap processes






Background (Cont.)

- Virtual address space logical view of how process is stored in memory
 - Usually start at address 0, contiguous addresses until end of space
 - Meanwhile, physical memory organized in page frames
 - MMU must map logical to physical
- Virtual memory can be implemented via:
 - Demand paging
 - Demand segmentation






Virtual Memory That is Larger Than Physical Memory

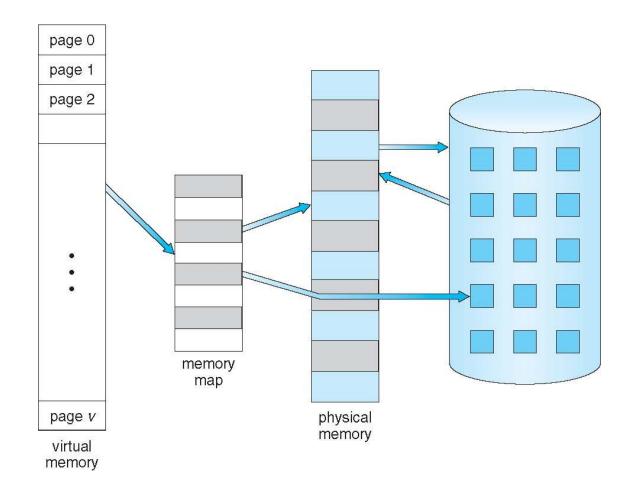





Shared Library Using Virtual Memory

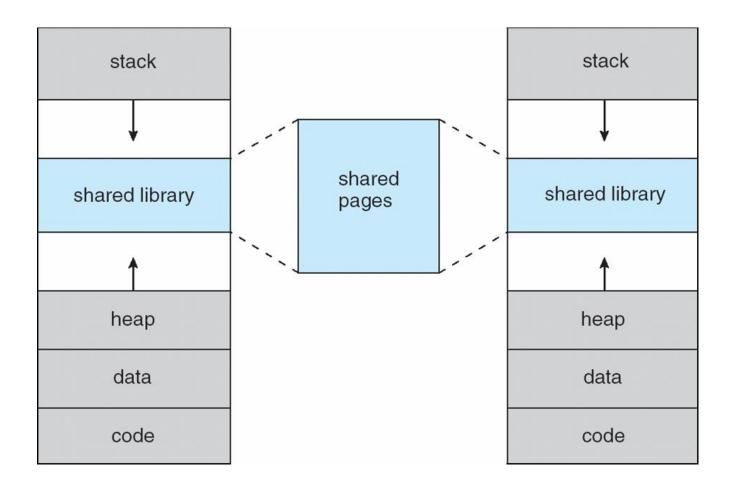






Demand Paging

- Could bring entire process into memory at load time
- Or bring a page into memory only when it is needed
 - Less I/O needed, no unnecessary I/O
 - Less memory needed
 - Faster response
 - More users
- Similar to paging system with swapping (diagram on right)
- □ Page is needed ⇒ reference to it
 - invalid reference ⇒ abort
 - □ not-in-memory ⇒ bring to memory
- Lazy swapper never swaps a page into memory unless page will be needed
 - Swapper that deals with pages is a pager

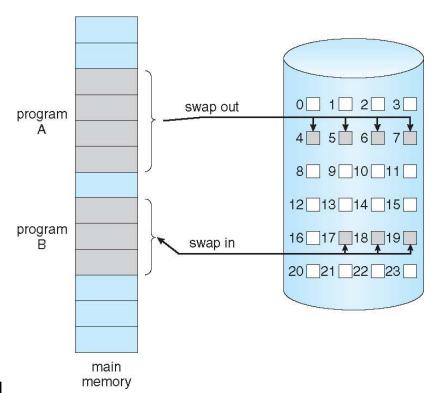






Basic Concepts

- □ With swapping, pager guesses which pages will be used before swapping out again
- Instead, pager brings in only those pages into memory
- How to determine that set of pages?
 - Need new MMU functionality to implement demand paging
- If pages needed are already memory resident
 - No difference from non demand-paging
- If page needed and not memory resident
 - Need to detect and load the page into memory from storage
 - Without changing program behavior
 - Without programmer needing to change code





Valid-Invalid Bit

- With each page table entry a valid—invalid bit is associated $(\mathbf{v} \Rightarrow \text{in-memory} - \text{memory} \text{resident}, \mathbf{i} \Rightarrow \text{not-in-memory})$
- Initially valid—invalid bit is set to i on all entries
- Example of a page table snapshot:


Frame #	valid-	<u>i</u> nvalid bit
	V	
	V	
	V	
	i	


	i	
	i]
page tab	le	

During MMU address translation, if valid—invalid bit in page table entry is $i \Rightarrow$ page fault




Page Table When Some Pages Are Not in Main Memory



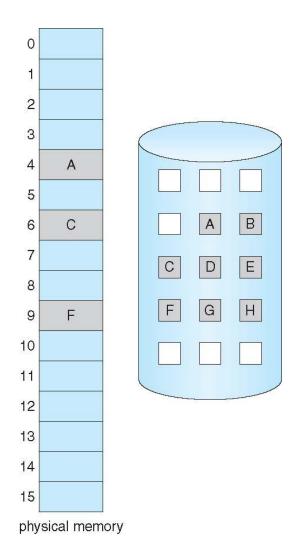





Page Fault

If there is a reference to a page, first reference to that page will trap to operating system:


page fault

- 1. Operating system looks at another table to decide:
 - □ Invalid reference ⇒ abort
 - Just not in memory
- 2. Find free frame
- 3. Swap page into frame via scheduled disk operation
- Reset tables to indicate page now in memory Set validation bit = v
- 5. Restart the instruction that caused the page fault





Steps in Handling a Page Fault

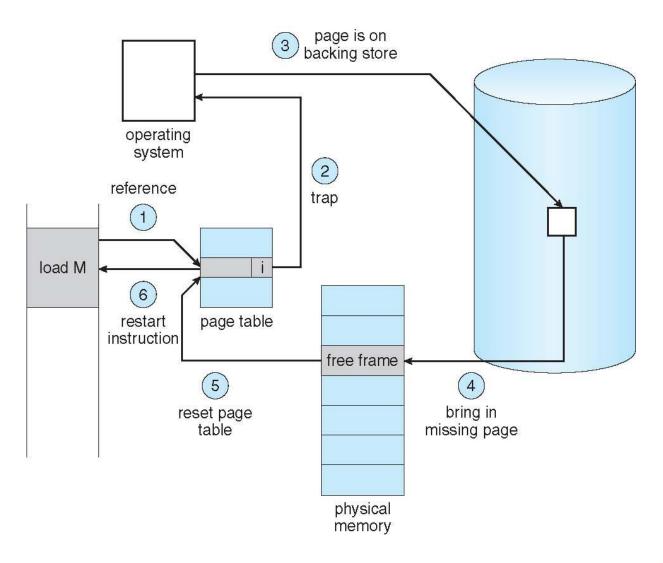





Aspects of Demand Paging


- Extreme case start process with no pages in memory
 - OS sets instruction pointer to first instruction of process, nonmemory-resident -> page fault
 - And for every other process pages on first access
 - Pure demand paging
- Actually, a given instruction could access multiple pages -> multiple page faults
 - Consider fetch and decode of instruction which adds 2 numbers from memory and stores result back to memory
 - Pain decreased because of locality of reference
- Hardware support needed for demand paging
 - Page table with valid / invalid bit
 - Secondary memory (swap device with swap space)
 - Instruction restart





Instruction Restart

- Consider an instruction that could access several different locations
 - block move



- auto increment/decrement location
- Restart the whole operation?
 - What if source and destination overlap?





Performance of Demand Paging

- Stages in Demand Paging (worse case)
- 1. Trap to the operating system
- 2. Save the user registers and process state
- 3. Determine that the interrupt was a page fault
- 4. Check that the page reference was legal and determine the location of the page on the disk
- 5. Issue a read from the disk to a free frame:
 - 1. Wait in a queue for this device until the read request is serviced
 - Wait for the device seek and/or latency time
 - 3. Begin the transfer of the page to a free frame
- 6. While waiting, allocate the CPU to some other user
- 7. Receive an interrupt from the disk I/O subsystem (I/O completed)
- 8. Save the registers and process state for the other user
- 9. Determine that the interrupt was from the disk
- 10. Correct the page table and other tables to show page is now in memory
- 11. Wait for the CPU to be allocated to this process again
- 12. Restore the user registers, process state, and new page table, and then resume the interrupted instruction



Performance of Demand Paging (Cont.)

- Three major activities
 - Service the interrupt careful coding means just several hundred instructions needed
 - Read the page lots of time
 - Restart the process again just a small amount of time
- □ Page Fault Rate $0 \le p \le 1$

 - \square if p = 1, every reference is a fault
- □ Effective Access Time (EAT)

EAT =
$$(1 - p)$$
 x memory access
+ p (page fault overhead
+ swap page out
+ swap page in)





Demand Paging Example

- ☐ Memory access time = 200 nanoseconds
- □ Average page-fault service time = 8 milliseconds

□ EAT =
$$(1 - p) \times 200 + p$$
 (8 milliseconds)
= $(1 - p \times 200 + p \times 8,000,000$
= $200 + p \times 7,999,800$

☐ If one access out of 1,000 causes a page fault, then EAT = 8.2 microseconds.

This is a slowdown by a factor of 40!!

- ☐ If want performance degradation < 10 percent
 - 220 > 200 + 7,999,800 x p20 > 7,999,800 x p
 - □ p < .0000025
 - < one page fault in every 400,000 memory accesses</p>





Demand Paging Optimizations


- □ Swap space I/O faster than file system I/O even if on the same device
 - Swap allocated in larger chunks, less management needed than file system
- □ Copy entire process image to swap space at process load time
 - Then page in and out of swap space
 - Used in older BSD Unix
- Demand page in from program binary on disk, but discard rather than paging out when freeing frame
 - Used in Solaris and current BSD
 - Still need to write to swap space
 - Pages not associated with a file (like stack and heap) anonymous memory
 - Pages modified in memory but not yet written back to the file system
- Mobile systems
 - Typically don't support swapping
 - Instead, demand page from file system and reclaim read-only pages (such as code)



What Happens if There is no Free Frame?

- Used up by process pages
- □ Also in demand from the kernel, I/O buffers, etc
- How much to allocate to each?
- Page replacement find some page in memory, but not really in use, page it out
 - Algorithm terminate? swap out? replace the page?
 - Performance want an algorithm which will result in minimum number of page faults
- Same page may be brought into memory several times







Page Replacement


- Prevent over-allocation of memory by modifying pagefault service routine to include page replacement
- ☐ Use modify (dirty) bit to reduce overhead of page transfers only modified pages are written to disk
- Page replacement completes separation between logical memory and physical memory – large virtual memory can be provided on a smaller physical memory







Need For Page Replacement








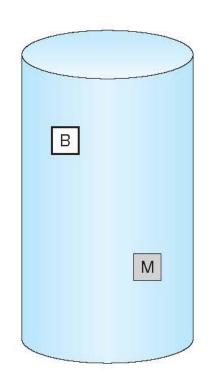






Basic Page Replacement


- 1. Find the location of the desired page on disk
- 2. Find a free frame:
 - If there is a free frame, use it
 - If there is no free frame, use a page replacement algorithm to select a victim frame
 - Write victim frame to disk if dirty
- Bring the desired page into the (newly) free frame; update the page and frame tables
- 4. Continue the process by restarting the instruction that caused the trap

Note now potentially 2 page transfers for page fault – increasing EAT



Page Replacement



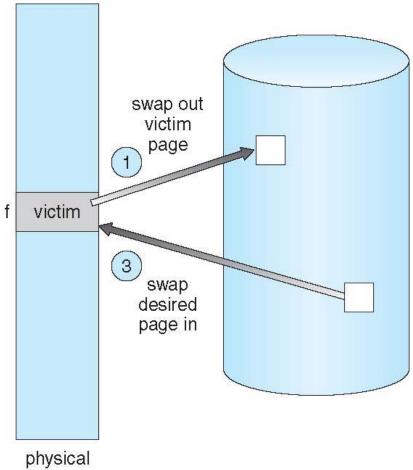

memory






Page and Frame Replacement Algorithms


- □ Frame-allocation algorithm determines
 - How many frames to give each process
 - Which frames to replace
- □ Page-replacement algorithm
 - Want lowest page-fault rate on both first access and re-access
- Evaluate algorithm by running it on a particular string of memory references (reference string) and computing the number of page faults on that string
 - String is just page numbers, not full addresses
 - Repeated access to the same page does not cause a page fault
 - Results depend on number of frames available
- In all our examples, the reference string of referenced page numbers is

7,0,1,2,0,3,0,4,2,3,0,3,0,3,2,1,2,0,1,7,0,1






Graph of Page Faults Versus The Number of Frames

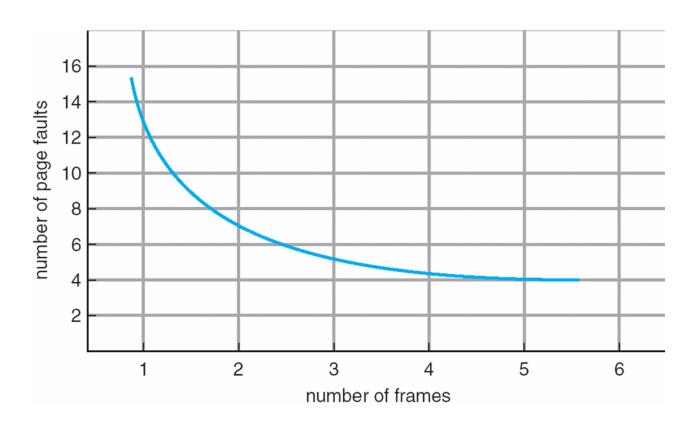





First-In-First-Out (FIFO) Algorithm

- Reference string: 7,0,1,2,0,3,0,4,2,3,0,3,0,3,2,1,2,0,1,7,0,1
- □ 3 frames (3 pages can be in memory at a time per process)


15 page faults

- □ Can vary by reference string: consider 1,2,3,4,1,2,5,1,2,3,4,5
 - Adding more frames can cause more page faults!
 - Belady's Anomaly
- How to track ages of pages?
 - Just use a FIFO queue





FIFO Illustrating Belady's Anomaly

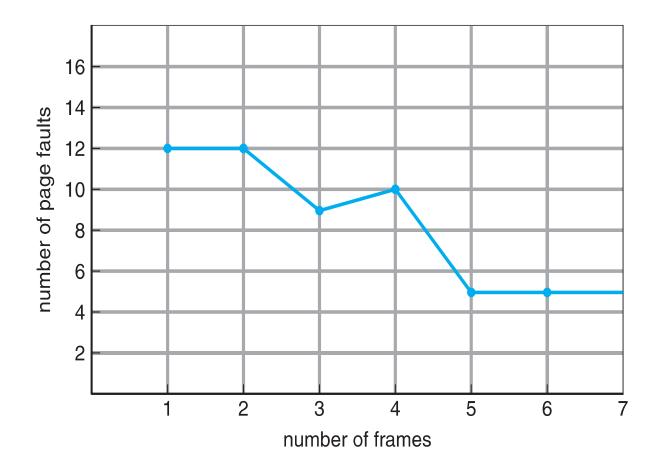






Optimal Algorithm


- Replace page that will not be used for longest period of time
 - 9 is optimal for the example
- How do you know this?
 - Can't read the future
- Used for measuring how well your algorithm performs

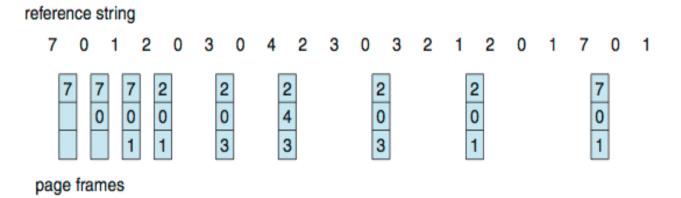



Least Recently Used (LRU) Algorithm

- Use past knowledge rather than future
- Replace page that has not been used in the most amount of time
- Associate time of last use with each page

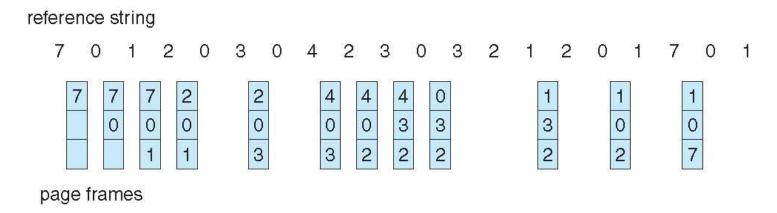


- □ 12 faults better than FIFO but worse than OPT
- Generally good algorithm and frequently used
- But how to implement?



LRU Algorithm (Cont.)


- Counter implementation
 - Every page entry has a counter; every time page is referenced through this entry, copy the clock into the counter
 - When a page needs to be changed, look at the counters to find smallest value
 - Search through table needed
- Stack implementation
 - Keep a stack of page numbers in a double link form:
 - Page referenced:
 - move it to the top
 - requires 6 pointers to be changed
 - But each update more expensive
 - No search for replacement
- LRU and OPT are cases of stack algorithms that don't have Belady's Anomaly




Use Of A Stack to Record Most Recent Page References

reference string













LRU Approximation Algorithms

- □ LRU needs special hardware and still slow
- □ Reference bit
 - □ With each page associate a bit, initially = 0
 - When page is referenced bit set to 1
 - Replace any with reference bit = 0 (if one exists)
 - We do not know the order, however
- Second-chance algorithm
 - Generally FIFO, plus hardware-provided reference bit
 - Clock replacement
 - If page to be replaced has
 - ▶ Reference bit = 0 -> replace it
 - reference bit = 1 then:
 - set reference bit 0, leave page in memory
 - replace next page, subject to same rules





Second-Chance (clock) Page-Replacement Algorithm

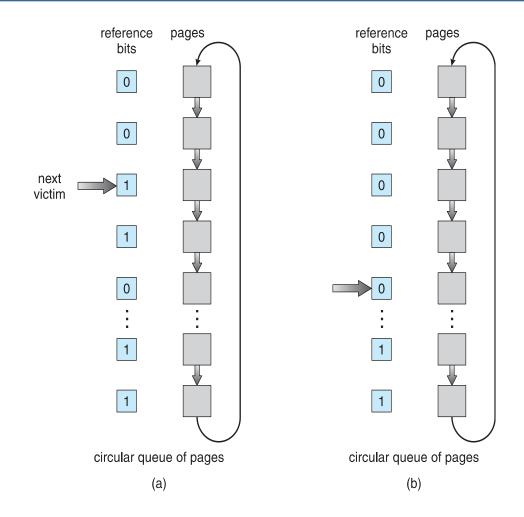





Enhanced Second-Chance Algorithm

- Improve algorithm by using reference bit and modify bit (if available) in concert
- □ Take ordered pair (reference, modify)
- 1. (0, 0) neither recently used not modified best page to replace
- (0, 1) not recently used but modified not quite as good, must write out before replacement
- 3. (1, 0) recently used but clean probably will be used again soon
- 4. (1, 1) recently used and modified probably will be used again soon and need to write out before replacement
- When page replacement called for, use the clock scheme but use the four classes replace page in lowest non-empty class
 - Might need to search circular queue several times





Counting Algorithms

- Keep a counter of the number of references that have been made to each page
 - Not common
- Lease Frequently Used (LFU) Algorithm: replaces page with smallest count
- Most Frequently Used (MFU) Algorithm: based on the argument that the page with the smallest count was probably just brought in and has yet to be used





Page-Buffering Algorithms

- Keep a pool of free frames, always
 - Then frame available when needed, not found at fault time
 - Read page into free frame and select victim to evict and add to free pool
 - When convenient, evict victim
- Possibly, keep list of modified pages
 - When backing store otherwise idle, write pages there and set to non-dirty
- Possibly, keep free frame contents intact and note what is in them
 - If referenced again before reused, no need to load contents again from disk
 - Generally useful to reduce penalty if wrong victim frame selected





Applications and Page Replacement

- All of these algorithms have OS guessing about future page access
- □ Some applications have better knowledge i.e. databases
- Memory intensive applications can cause double buffering
 - OS keeps copy of page in memory as I/O buffer
 - Application keeps page in memory for its own work
- Operating system can given direct access to the disk, getting out of the way of the applications
 - Raw disk mode
- Bypasses buffering, locking, etc.



End of Chapter 9

