SPROCKET 72z9 (1:2)

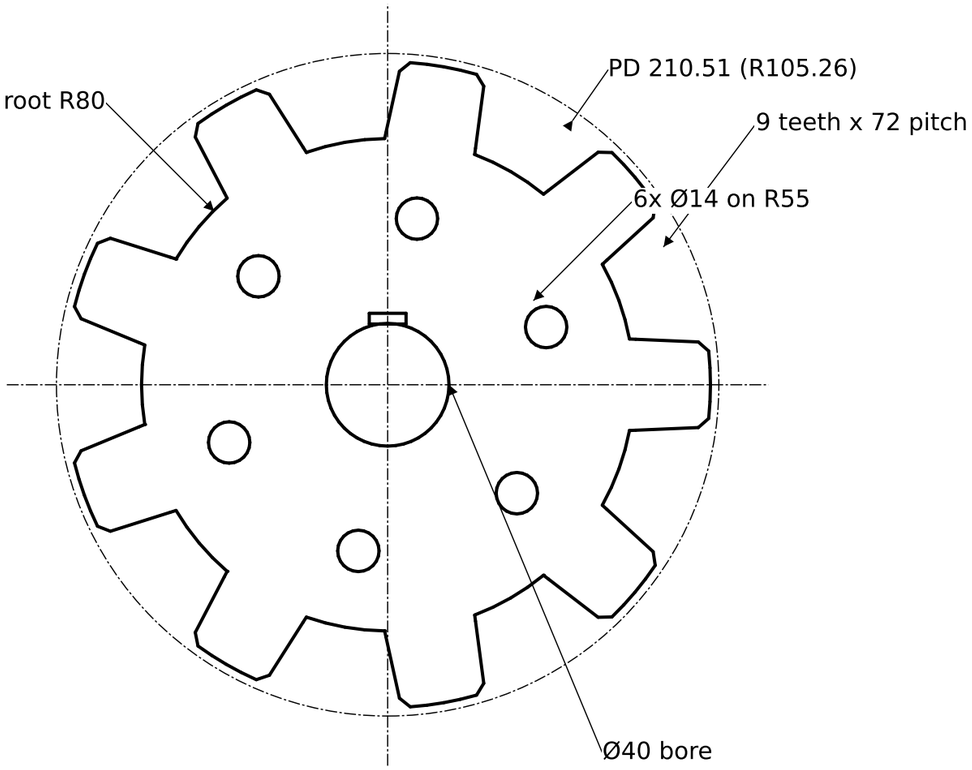

2 plates / side pack, 8mm each; 6x D14 mount holes

HUB (1:1)

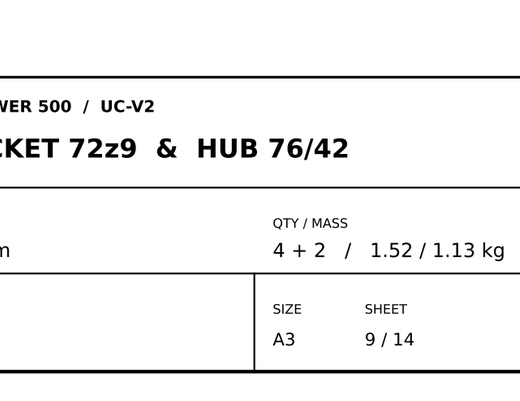

6x8 rings, faced

DRIVE PARTS

part	description	mat	qty	kg
72z9	9T x 72, PD210.51, D40, 8mm	E250	4	1.52
hub76	OD76/ID42 x44, 12JS9	E250	2	1.13

NOTES

1. 72 mm pitch, 9 teeth, PD 210.51; laser 8mm E250, 2 plates/side pack.
2. Tooth profile per sprocket_72z9.dxf; tip R105.26, root R80.
3. Bore D40; hub carries the 12JS9 keyway (outsource).
4. Hub: 6 rings OD76/ID42x8 stacked 48, faced to 44; weld to pack.
5. Pack 2x8 = 16 wide, centred on track (y=+-260); hub 238..282.

FLAIL MOWER 500 / UC-V2

SPROCKET 72z9 & HUB 76/42

DWG No.
UCV2-P-005
REV A

MATERIAL
E250 8mm

QTY / MASS
4 + 2 / 1.52 / 1.13 kg

UNITS: mm
1st ANGLE

SCALE
1:2 / 1:1

SIZE
A3

SHEET
9 / 14

DATE
2026-10-29

DRAWN
OC