SIDE ELEVATION (1:5)

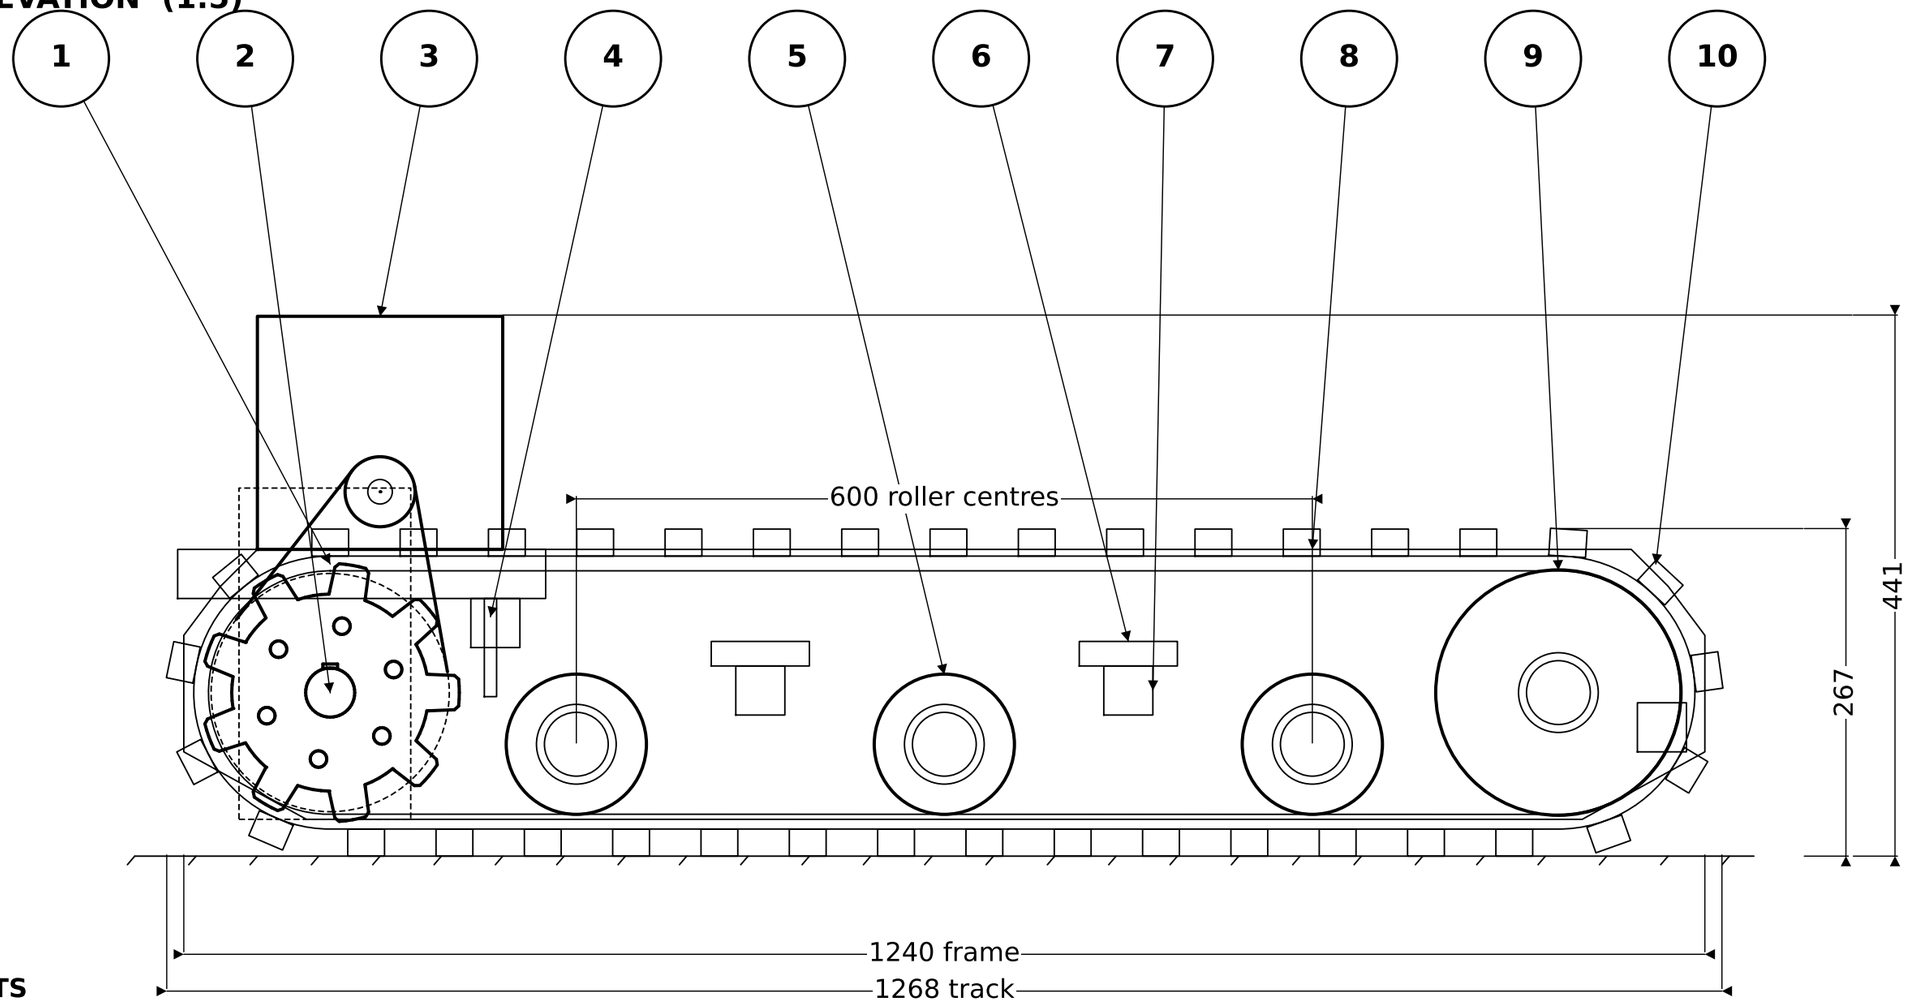

CALL-OUTS

1	SPROCKET 72z9	**6**	DECK PAD 80 × 80
2	AXLE Ø40	**7**	BEAM SHS40
3	MOTOR 1.2 kW	**8**	SIDE PLATE 6 mm
4	LIFT LUG	**9**	IDLER Ø200
5	ROLLER Ø114.3 (3)	**10**	TRACK 180 × 72 × 37

NOTES

1. Near side plate removed for clarity; running gear shown true.
2. Datum: ground at lug tips z=0, X travel, Z up. Dimensions mm.
3. Track loop: 37 links × 72 pitch, R105.26, C1001.3 (closure 0).
4. Chain plane y=±140; 48T/14T 428, 60 links, C=168.66 mm.
5. Overall W826 over UCFL208 flanges; side-plate span 726; track span 700.
6. Motor body y 4..134 (inboard); chain runs at y=140, outboard of motor.
7. Loop centre z=133.3; roller centre z=91.2. Call-outs 1-10 at left.

FLAIL MOWER 500 / UC-V2

GENERAL ARRANGEMENT - SIDE ELEVATION

DWG No.
UCV2-GA-001
REV A

MATERIAL	QTY	
-	1	**UNITS: mm** 1st ANGLE

SCALE	SIZE	SHEET	DATE	DRAWN
1:5	A3	1 / 15	2026-10-29	OC