


Configure OSPF Protocol

TOPOLOGY:

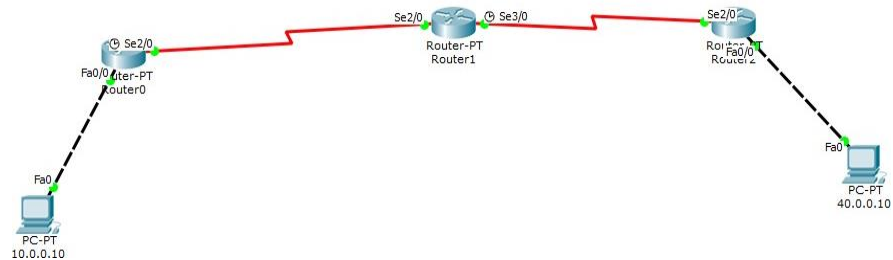

Router0

Physical Config CLI

IOS Command Line Interface

```
Router(config-router)#router-id 1.1.1.1
Router(config-router)#network 10.0.0.0 0.255.255.255 area 3
Router(config-router)#network 20.0.0.0 0.255.255.255 area 1
Router(config-router)#exit
Router(config)#
00:20:32: %OSPF-5-ADJCHG: Process 1, Nbr 2.2.2.2 on Serial2/0 from LOADING to FULL, Loading Done


Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route


Gateway of last resort is not set

C    10.0.0.0/8 is directly connected, FastEthernet0/0
C    20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    20.0.0.0/8 is directly connected, Serial2/0
C    20.0.0.2/32 is directly connected, Serial2/0
O IA 30.0.0.0/8 [110/128] via 20.0.0.2, 00:02:04, Serial2/0
O IA 40.0.0.0/8 [110/129] via 20.0.0.2, 00:00:32, Serial2/0
Router#
```

Copy Paste

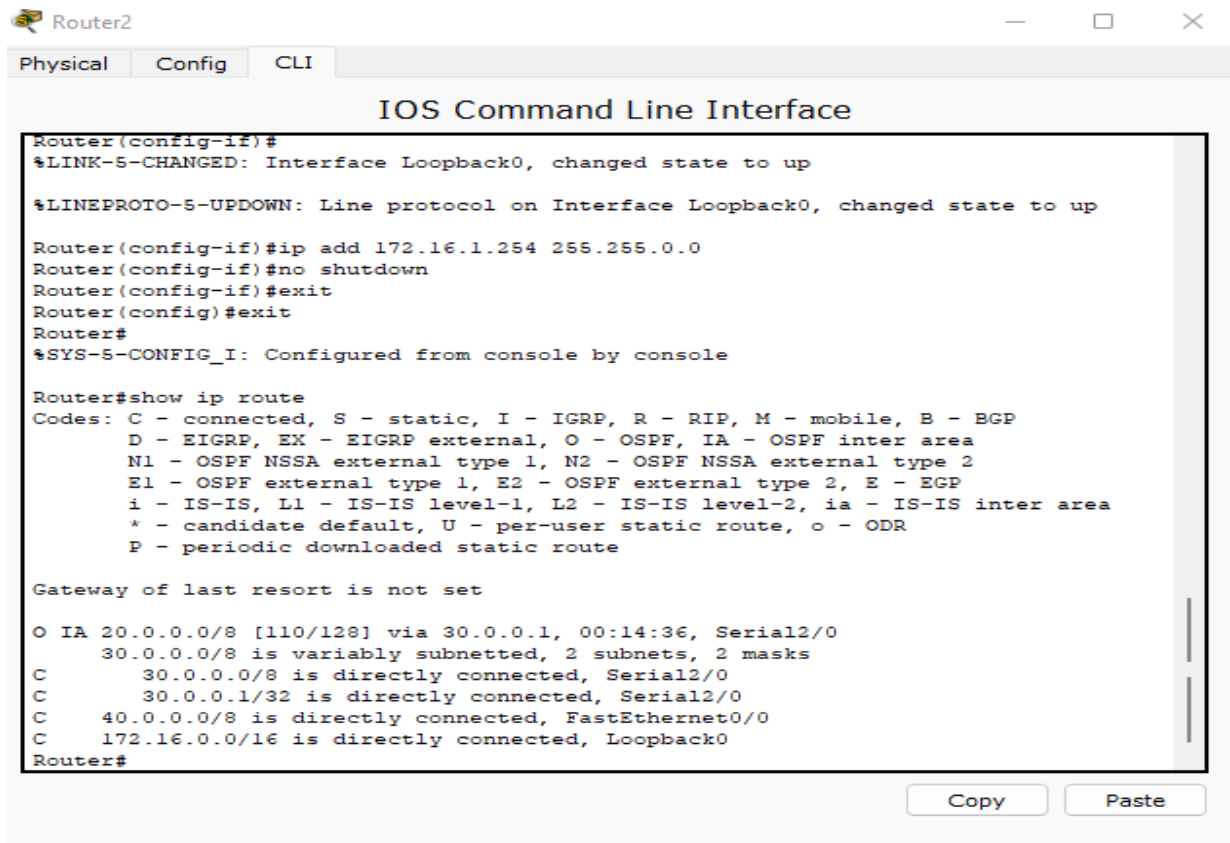

OUTPUT:

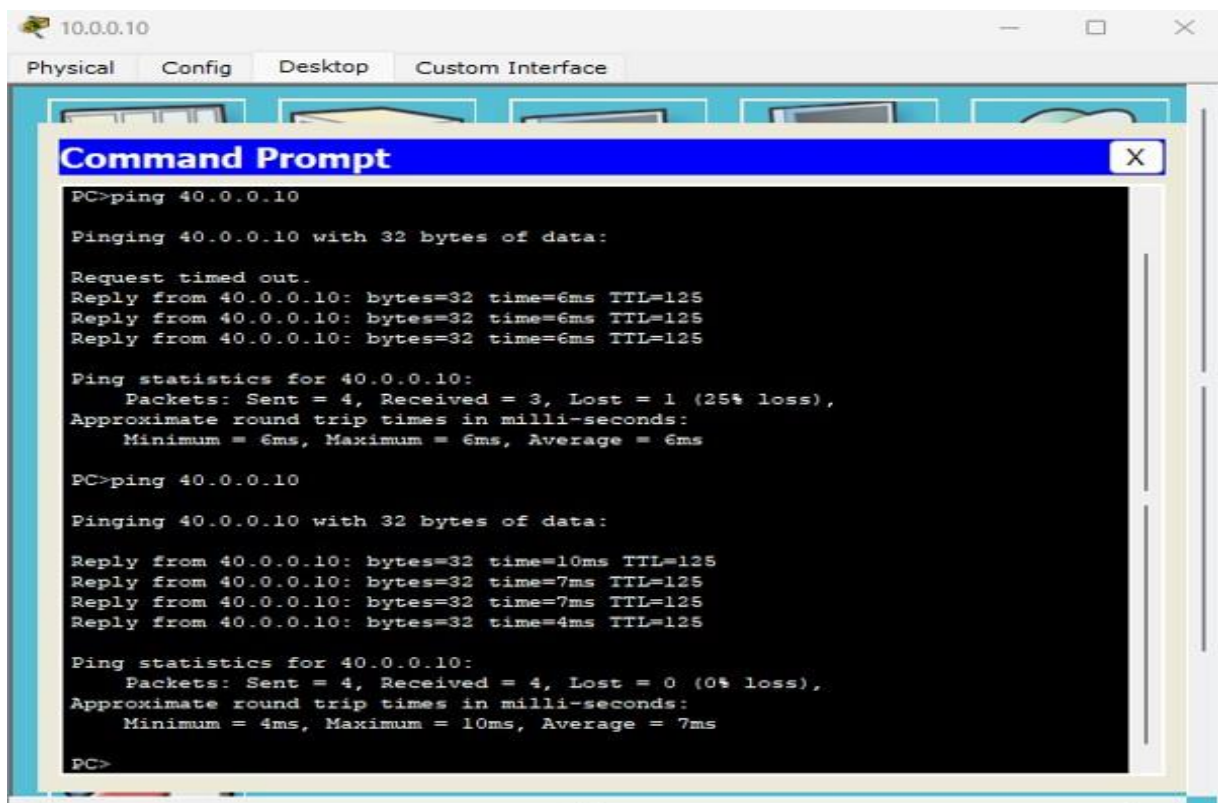

```
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router ospf 1
Router(config-router)#router id 1.1.1.1
^
% Invalid input detected at '^' marker.
Router(config-router)#router-id 1.1.1.1
Router(config-router)#10.0.0.0 0.255.255.255 area 3
^
% Invalid input detected at '^' marker.
Router(config-router)#network 10.0.0.0 0.255.255.255 area 3
Router(config-router)#network 20.0.0.0 0.255.255.255 area 1
Router(config-router)#exit
Router(config)#
00:34:12: %OSPF-5-ADJCHG: Process 1, Nbr 2.2.2.2 on Serial2/0 from LOADING to FULL, Loading Done
Router(config)#interface loopback 0

Router(config-if)#
%LINK-5-CHANGED: Interface Loopback0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Loopback0, changed state to up

Router(config-if)#ip add 172.16.1.252 255.255.0.0
Router(config-if)#no shutdown
Router(config-if)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
        i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
        * - candidate default, U - per-user static route, o - ODR
        P - periodic downloaded static route

Gateway of last resort is not set

C    10.0.0.0/8 is directly connected, FastEthernet0/0
C    20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        20.0.0.0/8 is directly connected, Serial2/0
C        20.0.0.2/32 is directly connected, Serial2/0
O IA 30.0.0.0/8 [110/128] via 20.0.0.2, 00:11:01, Serial2/0
O IA 40.0.0.0/8 [110/129] via 20.0.0.2, 00:08:43, Serial2/0
C    172.16.0.0/16 is directly connected, Loopback0
Router#configure terminal
^
% Invalid input detected at '^' marker.

Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router ospf 1
Router(config-router)#area 1 virtual-link 2.2.2.2
Router(config-router)#
00:51:13: %OSPF-5-ADJCHG: Process 1, Nbr 2.2.2.2 on OSPF_VL0 from LOADING to FULL, Loading Done
```

```

Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router ospf 1
Router(config-router)#router id 2.2.2.2
      ^
% Invalid input detected at '^' marker.

Router(config-router)#router-id 2.2.2.2
Router(config-router)#network 20.0.0.0 0.255.255.255 area 1
Router(config-router)#network 20.0.0.0 0.255.255.255 area 1
00:34:09: %OSPF-5-ADJCHG: Process 1, Nbr 1.1.1.1 on Serial2/
Router(config-router)#network 30.0.0.0 0.255.255.255 area 0
Router(config-router)#exit
Router(config)#
00:36:54: %OSPF-5-ADJCHG: Process 1, Nbr 3.3.3.3 on Serial3/0 from LOADING to FULL, Loading Done

Router(config)#interface loopback 0

Router(config-if)#
%LINK-5-CHANGED: Interface Loopback0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Loopback0, changed state to up

Router(config-if)#ip add 172.16.1.253 255.255.0.0
Router(config-if)#no shutdown
      ^
% Invalid input detected at '^' marker.

Router(config-if)#no shutdown
Router(config-if)#exit
Router(config)#
00:49:10: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0

Router(config)#
00:49:21: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0
00:49:31: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0
00:49:41: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0

Router(config)#ospf 1
00:49:51: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0
      ^
% Invalid input detected at '^' marker.

Router(config)#ospf 1
00:50:01: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0
      ^
% Invalid input detected at '^' marker.

Router(config)#router ospf 1
00:50:11: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0
      ^
% Invalid input detected at '^' marker.

Router(config)#router ospf 1
Router(config-router)#
00:50:21: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0

Router(config-router)#
00:50:31: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0
      ^
% Invalid input detected at '^' marker.

Router(config)#router ospf 1
Router(config-router)#
00:50:21: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0

Router(config-router)#
00:50:31: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0
area 1
00:50:41: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0
virtual-link 1
00:50:51: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0
1.1.1
Router(config-router)#area 1 virtual-link 1.1.1.1
Router(config-router)#exit
00:51:11: %OSPF-5-ADJCHG: Process 1, Nbr 1.1.1.1 on OSPF_VL0 from LOADING to FULL, Loading Done

Router(config)#

Router con0 is now available

Press RETURN to get started.

```

```
Router>
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router-id 3.3.3.3
      ^
% Invalid input detected at '^' marker.

Router(config)#router ospf 1
Router(config-router)#router-id 3.3.3.3
Router(config-router)#network 30.0.0.0 0.255.255.255 area 0
Router(config-router)#network 30.0.0.0 0.255.255.255 area 0
00:36:51: %OSPF-5-ADJCHG: Process 1, Nbr 2.2.2.2 on Serial2/
Router(config-router)#network 40.0.0.0 0.255.255.255 area 2
Router(config-router)#exit
Router(config)#
Router(config)#interface loopback 0

Router(config-if)#
%LINK-5-CHANGED: Interface Loopback0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Loopback0, changed state to up

Router(config-if)#ip add 172.16.1.254 255.255.0.0
Router(config-if)#no shutdown
Router(config-if)#exit
Router(config)#
Router(config)#router ospf 1
      ^
% Invalid input detected at '^' marker.

Router(config)#router ospf 1
Router(config-router)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console


Router con0 is now available
```