

This configuration illustrates the setup of the VPN ASA (Remax) as well as the configuration of the associated OKTA group: grp-app-remax-saml-user-canal-plus-france

p3-passi-fp2130-1060a# sh version

Cisco Adaptive Security Appliance Software Version 9.20(4)10
SSP Operating System Version 2.14(3.109)
Device Manager Version 7.20(2)

Compiled on Sat 30-Aug-25 00:25 GMT by fpbesprd
System image file is "disk0:/mnt/boot/installables/switch/fxos-k8-fp2k-npu.2.14.3.109.SPA"
Config file at boot was "startup-config"

ip3-passi-fp2130-1060a up 151 days 17 hours
Start-up time 2 mins 34 secs

Hardware: FPR-2130, 13673 MB RAM, CPU MIPS 1200 MHz, 1 CPU (12 cores)

1: Int: Internal-Data0/1 : address is 000f.b748.4800, irq 0
3: Int: Not licensed : irq 0
4: Ext: Management1/1 : address is 481b.a4c9.ba01, irq 0
5: Int: Internal-Data1/1 : address is 0000.0100.0001, irq 0

License mode: Smart Licensing

Licensed features for this platform:

Maximum Physical Interfaces	: Unlimited
Maximum VLANs	: 1024
Inside Hosts	: Unlimited
Failover	: Active/Active
Encryption-DES	: Enabled
Encryption-3DES-AES	: Enabled
Security Contexts	: 2
Carrier	: Disabled
AnyConnect Premium Peers	: 7500
AnyConnect Essentials	: Disabled
Other VPN Peers	: 7500
Total VPN Peers	: 7500
AnyConnect for Mobile	: Enabled
AnyConnect for Cisco VPN Phone	: Enabled
Advanced Endpoint Assessment	: Enabled
Shared License	: Disabled
Total TLS Proxy Sessions	: 8000
Cluster	: Disabled

Serial Number: JAD273006YX
Configuration register is 0x1
Configuration last modified by adm-faaris at 13:27:23.844 UTC Wed Nov 26 2025

```
ip3-passi-fp2130-1060a# sh run tunnel-group tg_remax_canal-plus_user
```

```
tunnel-group tg_remax_canal-plus_user type remote-access
```

```
tunnel-group tg_remax_canal-plus_user webvpn-attributes
```

```
authentication saml
```

```
group-alias VPN_Canal-Plus_France enable
```

```
saml identity-provider http://www.okta.com/exkf3t740mCokudLY417
```

```
ip3-passi-fp2130-1060a# sh run webvpn saml
```

```
saml idp http://www.okta.com/exkf3t740mCokudLY417
```

```
url sign-in https://mylogin.canal-plus.com/app/cisco\_asa\_vpn\_saml/exkf3t740mCokudLY417/sso/saml
```

```
url sign-out https://mylogin.canal-plus.com/app/cisco\_asa\_vpn\_saml/exkf3t740mCokudLY417/slo/saml
```

```
base-url https://remax-d.canal-plus.com
```


```
trustpoint idp okta-user-2
```

```
trustpoint sp ASDM TrustPoint_2024
```

```
signature rsa-sha256
```

```
force re-authentication
```

```
timeout assertion 7200
```

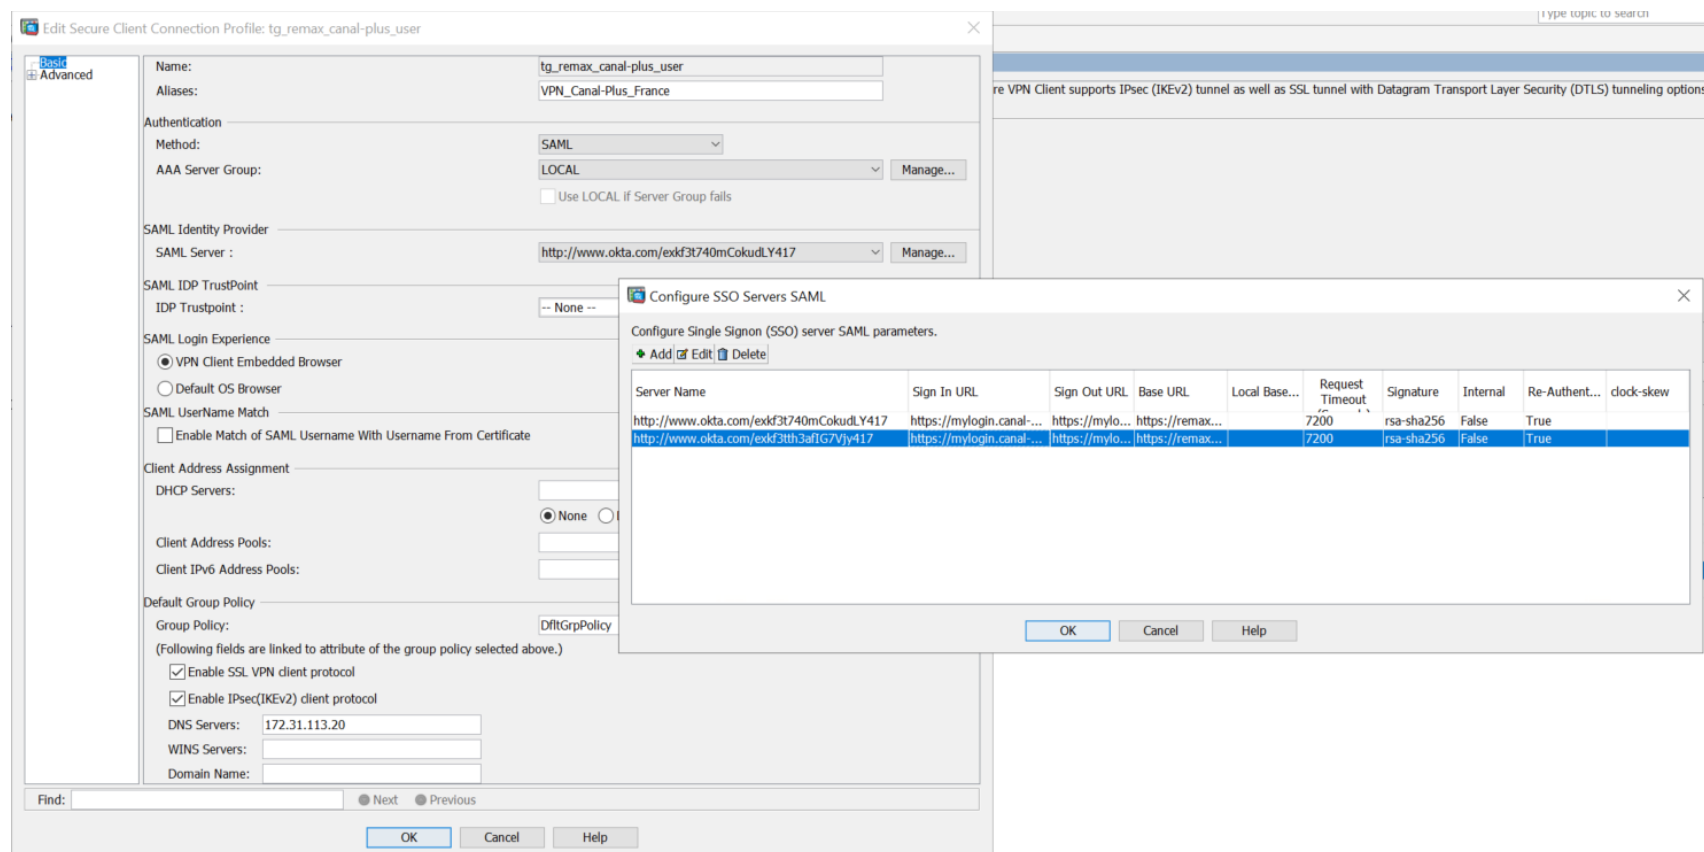

```
ip3-passi-fp2130-1060a# sh run group-policy grp-app-remax-saml-user-canal-plus-france
```

```
group-policy grp-app-remax-saml-user-canal-plus-france internal
group-policy grp-app-remax-saml-user-canal-plus-france attributes
  dns-server value 172.31.112.35 172.31.112.36
  vpn-simultaneous-logins 1
  vpn-idle-timeout 30
  vpn-session-timeout 1440
  vpn-tunnel-protocol ikev2 ssl-client
  group-lock value tg_remax_canal-plus_user
  default-domain value cpgrp.root.local
  msie-proxy method use-pac auto-detect
  msie-proxy pac-url value http://autoproxy.cplus/wpadcanalwsa.dat
  msie-proxy lockdown disable
  address-pools value Anyconnect_IP_Pool
webvpn
  anyconnect profiles value Anyconnect_Remax_Users_SSL type user
```

The screenshot shows the 'Edit Internal Group Policy' window for the policy 'grp-app-remax-saml-user-canal-plus-france'. The window is divided into a left sidebar with a tree view and a main configuration area.

Left Sidebar:

- General
- Servers
- Advanced
 - Split Tunneling
 - Browser Proxy
 - Secure Client
 - IPsec(IKEv1) C1

Main Configuration Area:

Name: grp-app-remax-saml-user-canal-plus-france

Banner: ☒ Inherit

SCEP forwarding URL: ☒ Inherit

Address Pools: ☐ Inherit Anyconnect_IP_Pool Select...

IPv6 Address Pools: ☒ Inherit Select...

More Options

Tunneling Protocols: ☐ Inherit ☒ SSL VPN Client ☐ IPsec IKEv1 ☒ IPsec IKEv2 ☐ L2TP/IPsec

Filter: ☒ Inherit Manage...

Access Hours: ☒ Inherit Manage...

Simultaneous Logins: ☐ Inherit 1

Restrict access to VLAN: ☒ Inherit

Connection Profile (Tunnel Group) Lock: ☐ Inherit tg_remax_canal-plus_user

Maximum Connect Time: ☐ Inherit ☐ Unlimited 1440 minutes

Idle Timeout: ☐ Inherit ☐ None 30 minutes

Security Group Tag (SGT): ☒ Inherit ☐ None (2 - 65519)

On smart card removal: ☒ Inherit ☐ Disconnect ☐ Keep the connection

Disable Delete tunnel with no delay in Simultaneous Connection preempt: ☒ Inherit ☐ Enabled ☐ Disabled

Timeout Alerts

Maximum Connect Time Alert Interval: ☒ Inherit ☐ Default minutes

Periodic Certificate Authentication Interval: ☒ Inherit ☐ Unlimited hours

Find: Next Previous

Buttons: OK Cancel Help

ip3-passi-fp2130-1060a# more dap.xml

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<dapRecordList>
<dapRecord>
<dapName>
<value>grp-app-remax-saml-user-canal-plus-france</value>
</dapName>
<dapViewsRelation>
<value>and</value>
</dapViewsRelation>
<dapBasicView>
<dapSelection>
<dapPolicy>
<value>match-all</value>
</dapPolicy>
<attr>
<name>aaa.cisco.tunnelgroup</name>
<value>tg_remax_canal-plus_user</value>
<operation>EQ</operation>
<type>caseless</type>
</attr>
<attr>
<name>aaa.saml.cisco_group_policy</name>
<value>grp-app-remax-saml-user-canal-plus-france</value>
<operation>EQ</operation>
</attr>
</dapSelection>
</dapBasicView>
</dapRecord>
</dapRecordList>
```

Configure Dynamic Access Policies

For IPsec, Secure Client, Clientless SSL VPN, and Cut-Through-Proxy sessions, you can configure dynamic access policies (DAP) that define which network resources a user is authorized to access. All policies in the table below are evaluated for matching criterion during session establishment. When none of the DAP policies match, the ASA will enforce the DfltAccessPolicy.

To use certain Endpoint attributes AV/AS/FW or AM/PFW , Enable [Posture Image](#) with valid package.

#	ACL Priority	Name	Network ACL List	Webtype ACL List	Description
☒	20	grp-app-remax-saml-user-canal-plus-france			
☐	15	grp-app-remax-saml-dev-mediahub-mam			
☐	10	grp-app-remax-saml-dev-fronttv-hapi			
☐	5	grp-app-remax-saml-dev-mediahub-traffic			
☐	-	DfltAccessPolicy			

Edit Dynamic Access Policy

Policy Name: grp-app-remax-saml-user-canal-plus-france

Description:

ACL Priority: 20

Selection Criteria

Define the AAA and endpoint attributes used to select this access policy. A policy is used when a user's authorization attributes match the AAA attribute criteria below and every endpoint attribute has been satisfied. These attributes can be created using the tables below and/or by expanding the Advanced option to specify the logical expression text.

User has ALL of the following AAA Attributes values...

AAA Attribute	Operation/Value
disco.tunnelgroup	= tg_remax_canal-plus_user
saml.disco_group_policy	= grp-app-remax-saml-user-ca...

= grp-app-remax-saml-user-canal-plus-france

and the following endpoint attributes are satisfied.

Endpoint ID	Name/Operation/Value
-------------	----------------------

Advanced

Access/Authorization Policy Attributes

Configure access/authorization attributes for this policy. Attribute values specified here will override those values obtained from the AAA system and the group-policy hierarchy. The resulting VPN authorization policy is an aggregation of DAP attributes, AAA attributes, and group-policy hierarchy attributes (those that are not specified in DAP).

Port Forwarding Lists	Bookmarks	Access Method	Secure Client	Secure Client Custom Attributes
Action	Network ACL Filters (client)		Webtype ACL Filters (clientless)	Functions

Action:

☒ Continue
☐ Quarantine
☐ Terminate

Specify the message that will be displayed when this record is selected.

User Message:

OK

Cancel

Help

[Configuration > Remote Access VPN > Clientless SSL VPN Access > Dynamic Access Policies](#)

Configure Dynamic Access Policies

For IPsec, Secure Client, Clientless SSL VPN, and Cut-Through-Proxy sessions, you can configure dynamic access policies (DAP) that define which network resources a user is authorized to access. All policies in the list are matched, the ASA will enforce the DfltAccessPolicy.

To use certain Endpoint attributes AV/AS/FW or AM/PFW, Enable [Posture Image](#) with valid package.

#	ACL Priority	Name
☐	20	grp-app-remax-saml-user-ca
☐	15	grp-app-remax-saml-dev-me
☐	10	grp-app-remax-saml-dev-fro
☐	5	grp-app-remax-saml-dev-me
☒	-	DfltAccessPolicy

Edit Dynamic Access Policy

Policy Name: DfltAccessPolicy

Description:

Access/Authorization Policy Attributes

Configure access/authorization attributes for this policy. Attribute values specified here will override those values obtained from the AAA system and the group-policy hierarchy. The resulting VPN authorization policy is an aggregation of DAP attributes, AAA attributes, and group-policy hierarchy attributes (those that are not specified in DAP).

Bookmarks

Access Method

Secure Client

Secure Client Custom Attributes

Action

Network ACL Filters (client)

Webtype ACL Filters (clientless)

Functions

Port Forwarding Lists

Action: ☐ Continue ☐ Quarantine ☒ Terminate ⓘ

Specify the message that will be displayed when this record is selected.

User Message:

*** DENY ***

OK

Cancel

Help