

# General Commands Reference Guide C



Release 02.2024

# General Commands Reference Guide C

TRACE32 Online Help

TRACE32 Directory

TRACE32 Index

TRACE32 Documents .....	
General Commands .....	
General Commands Reference Guide C .....	1
History .....	12
CACHE .....	13
CACHE .....	View and modify CPU cache contents 13
CACHE.CLEAN .....	Clean CACHE 13
CACHE.ComPare .....	Compare CACHE with memory 14
CACHE.DUMP .....	Dump CACHE 15
CACHE.FLUSH .....	Clean and invalidate CACHE 16
CACHE.GET .....	Get CACHE contents 17
CACHE.INFO .....	View all information related to an address 17
CACHE.INVALIDATE .....	Invalidate CACHE 18
CACHE.List .....	List CACHE contents 18
CACHE.ListFunc .....	List cached functions 19
CACHE.ListLine .....	List cached source code lines 20
CACHE.ListModule .....	List cached modules 20
CACHE.ListVar .....	List cached variables 21
CACHE.LOAD .....	Load previously stored cache contents 22
CACHE.RELOAD .....	Reload previously loaded cache contents 22
CACHE.SAVE .....	Save cache contents for postprocessing 22
CACHE.SNAPSHOT .....	Take cache snapshot for comparison 23
CACHE.UNLOAD .....	Unload previously loaded cache contents 24
CACHE.view .....	Display cache control register 25
CAnalyzer .....	26
CAnalyzer .....	Trace features of Compact Analyzer 26
CAnalyzer - Compact Analyzer specific Trace Commands .....	28
CAnalyzer.<specific_cmds> .....	Overview of CAnalyzer-specific commands 28
CAnalyzer.CLOCKDelay .....	Set clock delay 28
CAnalyzer.CLOSE .....	Close named pipes 28
CAnalyzer.DecodeMode .....	Define how to decode the received trace data 29
CAnalyzer.I2C .....	I2C control 30
CAnalyzer.PipeLOAD .....	Load a previously saved file 30
CAnalyzer.PipeRePlay .....	Replay a previously recorded stream 30

CAalyzer.PipeSAVE	Define a file that stores received data	31
CAalyzer.PipeWRITE	Define a named pipe as trace sink	31
CAalyzer.SAMPLE	Set sample time offset	32
CAalyzer.ShowFocus	Display data eye	33
CAalyzer.ShowFocusClockEye	Show clock eye	36
CAalyzer.ShowFocusEye	Show data eyes	37
CAalyzer.TERMination	Configure parallel trace termination	39
CAalyzer.TOut	Route trigger to POBBUS (CombiProbe/μTrace)	39
CAalyzer.TraceCLOCK	Configure the trace port frequency	40
CAalyzer.TracePORT	Select which trace port is used	41
CAalyzer.WRITE	Define a file as trace sink	42
<b>Generic CAalyzer Trace Commands .....</b>		<b>43</b>
CAalyzer.ACCESS	Define access path to program code for trace decoding	43
CAalyzer.Arm	Arm the trace	43
CAalyzer.AutoArm	Arm automatically	43
CAalyzer.AutoFocus	Calibrate AUTOFOCUS preprocessor	43
CAalyzer.AutoInit	Automatic initialization	43
CAalyzer.BookMark	Set a bookmark in trace listing	43
CAalyzer.BookMarkToggle	Toggles a single trace bookmark	44
CAalyzer.Chart	Display trace contents graphically	44
CAalyzer.CLOCK	Clock to calculate time out of cycle count information	44
CAalyzer.ComPare	Compare trace contents	44
CAalyzer.ComPareCODE	Compare trace with memory	44
CAalyzer.CustomTrace	Custom trace	44
CAalyzer.CustomTraceLoad	Load a DLL for trace analysis/Unload all DLLs	44
CAalyzer.DISable	Disable the trace	45
CAalyzer.DRAW	Plot trace data against time	45
CAalyzer.EXPORT	Export trace data for processing in other applications	45
CAalyzer.ExtractCODE	Extract code from trace	45
CAalyzer.FILE	Load a file into the file trace buffer	45
CAalyzer.Find	Find specified entry in trace	45
CAalyzer.FindAll	Find all specified entries in trace	45
CAalyzer.FindChange	Search for changes in trace flow	45
CAalyzer.FindProgram	Advanced trace search	46
CAalyzer.FindReProgram	Activate advanced existing trace search program	46
CAalyzer.FindViewProgram	State of advanced trace search programming	46
CAalyzer.FLOWPROCESS	Process flowtrace	46
CAalyzer.FLOWSTART	Restart flowtrace processing	46
CAalyzer.Get	Display input level	46
CAalyzer.GOTO	Move cursor to specified trace record	46
CAalyzer.Init	Initialize trace	47
CAalyzer.JOINFILE	Concatenate several trace recordings	47
CAalyzer.List	List trace contents	47

CAnalyzer.ListNesting	Analyze function nesting	47
CAnalyzer.ListVar	List variable recorded to trace	47
CAnalyzer.LOAD	Load trace file for offline processing	47
CAnalyzer.MERGEFILE	Combine two trace files into one	47
CAnalyzer.Mode	Set the trace operation mode	47
CAnalyzer.OFF	Switch off	48
CAnalyzer.PortFilter	Specify utilization of trace memory	48
CAnalyzer.PortType	Specify trace interface	48
CAnalyzer.PROfileChart	Profile charts	48
CAnalyzer.PROfileSTATistic	Statistical analysis in a table versus time	48
CAnalyzer.PROTOcol	Protocol analysis	48
CAnalyzer.PROTOcol.Chart	Graphic display for user-defined protocol	48
CAnalyzer.PROTOcol.Draw	Graphic display for user-defined protocol	49
CAnalyzer.PROTOcol.EXPORT	Export trace buffer for user-defined protocol	49
CAnalyzer.PROTOcol.Find	Find in trace buffer for user-defined protocol	49
CAnalyzer.PROTOcol.List	Display trace buffer for user-defined protocol	49
CAnalyzer.PROTOcol.PROfileChart	Profile chart for user-defined protocol	49
CAnalyzer.PROTOcol.PROfileSTATistic	Profile chart for user-defined protocol	49
CAnalyzer.PROTOcol.STATistic	Display statistics for user-defined protocol	49
CAnalyzer.REF	Set reference point for time measurement	50
CAnalyzer.RESet	Reset command	50
CAnalyzer.SAVE	Save trace for postprocessing in TRACE32	50
CAnalyzer.SelfArm	Automatic restart of trace recording	50
CAnalyzer.SIZE	Define buffer size	50
CAnalyzer.SnapShot	Restart trace capturing once	50
CAnalyzer.SPY	Adaptive stream and analysis	50
CAnalyzer.state	Display trace configuration window	50
CAnalyzer.STATistic	Statistic analysis	51
CAnalyzer.STREAMCompression	Select compression mode for streaming	51
CAnalyzer.STREAMFILE	Specify temporary streaming file path	51
CAnalyzer.STREAMFileLimit	Set size limit for streaming file	51
CAnalyzer.STREAMLOAD	Load streaming file from disk	51
CAnalyzer.STREAMSAVE	Save streaming file to disk	51
CAnalyzer.TDelay	Trigger delay	51
CAnalyzer.TestFocus	Test trace port recording	52
CAnalyzer.TestFocusClockEye	Scan clock eye	52
CAnalyzer.TestFocusEye	Check signal integrity	52
CAnalyzer.TestUtilization	Tests trace port utilization	52
CAnalyzer.THreshold	Optimize threshold for trace lines	52
CAnalyzer.Timing	Waveform of trace buffer	52
CAnalyzer.TraceCONNECT	Select on-chip peripheral sink	52
CAnalyzer.TRACK	Set tracking record	53
CAnalyzer.TSElect	Select trigger source	53

CAalyzer.View	Display single record	53
CAalyzer.ZERO	Align timestamps of trace and timing analyzers	53
<b>CIProbe</b> .....		<b>54</b>
CIProbe	Trace with Analog Probe and CombiProbe/?Trace (MicroTrace)	54
<b>CIProbe-specific Trace Commands</b> .....		<b>56</b>
CIProbe.<specific_cmds>	Overview of CIProbe-specific commands	56
CIProbe.ALOWerLIMit	Set lower trigger/filter comparator value	56
CIProbe.ATrigEN	Enable/disable trigger contribution of a channel	56
CIProbe.ATrigMODE	Set trigger/filter condition	58
CIProbe.AUPPerLIMit	Set upper trigger/filter comparator value	59
CIProbe.Mode	Set trace operation mode	59
CIProbe.state	Display CIProbe configuration window	60
CIProbe.TDelay	Define trigger delay	60
CIProbe.TOut	Route CIProbe trigger to PODBUS	61
CIProbe.TSElect	Route PODBUS trigger to CIProbe	62
CIProbe.TSYNC.SElect	Select trigger input pin and edge or state	62
<b>Generic CIProbe Trace Commands</b> .....		<b>64</b>
CIProbe.Arm	Arm the trace	64
CIProbe.AutoArm	Arm automatically	64
CIProbe.AutoInit	Automatic initialization	64
CIProbe.BookMark	Set a bookmark in trace listing	64
CIProbe.BookMarkToggle	Toggles a single trace bookmark	64
CIProbe.Chart	Display trace contents graphically	64
CIProbe.ComPare	Compare trace contents	65
CIProbe.DISable	Disable the trace	65
CIProbe.DisConfig	Trace disassembler configuration	65
CIProbe.DRAW	Plot trace data against time	65
CIProbe.EXPORT	Export trace data for processing in other applications	65
CIProbe.FILE	Load a file into the file trace buffer	65
CIProbe.Find	Find specified entry in trace	65
CIProbe.FindAll	Find all specified entries in trace	65
CIProbe.FindChange	Search for changes in trace flow	66
CIProbe.Get	Display input level	66
CIProbe.GOTO	Move cursor to specified trace record	66
CIProbe.Init	Initialize trace	66
CIProbe.List	List trace contents	66
CIProbe.ListNesting	Analyze function nesting	66
CIProbe.ListVar	List variable recorded to trace	66
CIProbe.LOAD	Load trace file for offline processing	66
CIProbe.OFF	Switch off	67
CIProbe.PROfile	Rolling live plots of trace data	67
CIProbe.PROfile.channel	Display profile of signal probe channels	67

CIProbe.PROfileChart	Profile charts	67
CIProbe.PROTOcol	Protocol analysis	67
CIProbe.PROTOcol.Chart	Graphic display for user-defined protocol	67
CIProbe.PROTOcol.Draw	Graphic display for user-defined protocol	67
CIProbe.PROTOcol.EXPORT	Export trace buffer for user-defined protocol	68
CIProbe.PROTOcol.Find	Find in trace buffer for user-defined protocol	68
CIProbe.PROTOcol.List	Display trace buffer for user-defined protocol	68
CIProbe.PROTOcol.PROfileChart	Profile chart for user-defined protocol	68
CIProbe.PROTOcol.PROfileSTATistic	Profile chart for user-defined protocol	68
CIProbe.PROTOcol.STATistic	Display statistics for user-defined protocol	68
CIProbe.REF	Set reference point for time measurement	68
CIProbe.RESet	Reset command	69
CIProbe.SAVE	Save trace for postprocessing in TRACE32	69
CIProbe.SIZE	Define buffer size	69
CIProbe.SPY	Adaptive stream and analysis	69
CIProbe.STATistic	Statistic analysis	69
CIProbe.STREAMCompression	Select compression mode for streaming	69
CIProbe.STREAMFILE	Specify temporary streaming file path	69
CIProbe.STREAMFileLimit	Set size limit for streaming file	70
CIProbe.Timing	Waveform of trace buffer	70
CIProbe.TRACK	Set tracking record	70
CIProbe.View	Display single record	70
CIProbe.ZERO	Align timestamps of trace and timing analyzers	70
<b>ClipStore .....</b>		<b>71</b>
ClipSTOre	Store settings to clipboard	71
<b>CLOCK .....</b>		<b>72</b>
CLOCK	Display date and time	72
CLOCK.BACKUP	Set backup clock frequency	72
CLOCK.DATE	Alias for DATE command	73
CLOCK.OFF	Disable clock frequency computation	73
CLOCK.ON	Enable clock frequency computation	73
CLOCK.OSCillator	Set board oscillator frequency	74
CLOCK.Register	Display PLL related registers	74
CLOCK.RESet	Reset CLOCK command group settings	74
CLOCK.state	Display clock frequencies	75
CLOCK.SYSCLock	Set external clock frequency	75
CLOCK.VCOBase	Set 'VCOBase' clock frequency	76
CLOCK.VCOBaseERAY	Set 'FlexRay VCOBase' clock frequency	76
<b>CMI .....</b>		<b>77</b>
CMI	Clock management interface	77
<b>CMN .....</b>		<b>78</b>
CMN	Coherent mesh network	78

<b>CMN&lt;trace&gt; - Trace Data Analysis</b>	<b>79</b>
CMN<trace>	Command groups for CMN<trace> 79
Overview CMN<trace>	79
CMNAnalyzer	Analyze CMN information recorded by TRACE32 PowerTrace 80
CMNCAAnalyzer	Analyze CMN information recorded by CombiProbe 80
CMNHAAnalyzer	Analyze CMN information captured by the host analyzer 81
CMNLA	Analyze CMN information from binary source 81
CMNONchip	Analyze CMN information captured in target onchip memory 81
<b>CORE</b>	<b>83</b>
CORE	Cores in an SMP system 83
Overview CORE	83
CORE.ADD	Add core/thread to the SMP system 84
CORE.ASSIGN	Assign a set of physical cores/threads to the SMP system 85
CORE.List	List information about cores 91
CORE.NUMber	Assign a number of cores/threads to the SMP system 92
CORE.ReMove	Remove core from the SMP system 93
CORE.select	Change currently selected core 93
CORE.SHOWACTIVE	Show active/inactive cores in an SMP system 94
CORE.SINGLE	Select single core for debugging 95
<b>Count</b>	<b>97</b>
Count	Universal counter 97
Overview Count	97
Counter of TRACE32-ICD	97
Counter Functions	98
Count.AutoInit	Automatic counter reset 99
Count.Gate	Gate time 99
Count.GO	Start measurement 100
Count.Init	Reset counter 100
Count.Mode	Mode selection 101
Count.OUT	Forward counter input signal to trigger system/output 103
Count.PROfile	Graphic counter display 103
Count.RESet	Reset command 105
Count.Select	Select input source 105
Count.state	State display 106
<b>COverage</b>	<b>107</b>
COverage	Trace-based code coverage 107
COverage.ADD	Add trace contents to database 107
COverage.Delete	Modify coverage 108
COverage.EXPORT	Export code coverage information to an XML file 109
COverage.EXPORT.CBA	Export HLL lines in CBA format 109
COverage.EXPORT.CSV	Export coverage data in CSV format 110
COverage.EXPORT.JSON	Export code coverage in JSON format 111

COVerage.EXPORT.JSONE	Export code coverage in extended JSON format	111
COVerage.EXPORT.ListCalleEs	Export the function callees	113
COVerage.EXPORT.ListCalleEs.<sub_cmd>	Export callees information	114
COVerage.EXPORT.ListCalleRs	Export the function callers	115
COVerage.EXPORT.ListCalleRs.<sub_cmd>	Export callers information	116
COVerage.EXPORT.ListFunc	Export HLL function	117
COVerage.EXPORT.ListFunc.<sub_cmd>	Export HLL function information	117
COVerage.EXPORT.ListInlineBlock	Export inlined code blocks	122
COVerage.EXPORT.ListInlineBlock.<sub_cmd>	Export cov. inlined	123
COVerage.EXPORT.ListLine	Export HLL lines	124
COVerage.EXPORT.ListLine.<sub_cmd>	Export HLL lines information	125
COVerage.EXPORT.ListModule	Export modules	126
COVerage.EXPORT.ListModule.<sub_cmd>	Export modules information	126
COVerage.EXPORT.ListVar	Export HLL variables	127
COVerage.EXPORT.ListVar.<sub_cmd>	Export HLL variables information	127
COVerage.Init	Clear coverage database	128
COVerage.List	Coverage display	128
COVerage.ListCalleEs	Display coverage for callees function	129
COVerage.ListCalleEs.<sub_cmd>	Display coverage for callees function	129
COVerage.ListCalleRs	Display coverage for callers function	132
COVerage.ListCalleRs.<sub_cmd>	Display coverage for callers function	132
COVerage.ListFunc	Display coverage for functions	135
COVerage.ListFunc.<sub_cmd>	Display coverage for HLL function	135
COVerage.ListInlineBlock	Display coverage for inlined block	139
COVerage.ListInlineBlock.<sub_cmd>	Display coverage for inlined block	139
COVerage.ListLine	Display coverage for HLL lines	142
COVerage.ListLine.<sub_cmd>	Display coverage for HLL lines	142
COVerage.ListModule	Display coverage for modules	144
COVerage.ListModule.<sub_cmd>	Display coverage for modules	144
COVerage.ListVar	Display coverage for variable	147
COVerage.ListVar.<sub_cmd>	Display coverage for variables	147
COVerage.LOAD	Load coverage database from file	150
COVerage.MAP	Map the coverage to a different range	151
COVerage.METHOD	Select code coverage method	152
COVerage.Mode	Activate code coverage for virtual targets	153
COVerage.OFF	Deactivate coverage	153
COVerage.ON	Activate coverage	154
COVerage.Option	Set coverage options	155
COVerage.Option.BLOCKMode	Enable/disable line block mode	155
COVerage.Option.ITrace	Enable instruction trace processing	156
COVerage.Option.SourceMetric	Select code coverage metric	156
COVerage.Option.StaticInfo	Perform code coverage precalculations	158
COVerage.RESet	Clear coverage database	159



COVerage.SAVE	Save coverage database to file	159
COVerage.Set	Coverage modification	160
COVerage.state	Configure coverage	161
COVerage.TreeWalkSETUP	Prepare a tree with code coverage symbols	162
COVerage.TreeWalkSETUP.<sub_cmd>	Prepare a coverage symbol tree	162
<b>CTS .....</b>		<b>164</b>
CTS	Context tracking system (CTS)	164
Trace-based Debugging		165
Full High-Level Language Trace Display		166
Reconstruction of Trace Gaps (TRACE32-ICD)		166
CTS Commands		167
CTS.CACHE	CTS cache analysis	167
CTS.CACHE.Allocation	Define the cache allocation technique	169
CTS.CACHE.CYcles	Define counting method for cache analysis	170
CTS.CACHE.DefineBus	Define bus interface	170
CTS.CACHE.L1Architecture	Define architecture for L1 cache	172
CTS.CACHE.LFSR	Linear-feedback shift register for random generator	172
CTS.CACHE.ListAddress	Address based cache analysis	173
CTS.CACHE.ListFunc	Function based cache analysis	174
CTS.CACHE.ListLine	HLL line based cache analysis	175
CTS.CACHE.ListModules	Module based cache analysis	175
CTS.CACHE.ListRequests	Display request for a single cache line	176
CTS.CACHE.ListSet	Cache set based cache analysis	177
CTS.CACHE.ListVar	Variable based cache analysis	177
CTS.CACHE.MMUArchitecture	Define MMU architecture for cache control	178
CTS.CACHE.Mode	Define memory coherency strategy	179
CTS.CACHE.Replacement	Define the replacement strategy	180
CTS.CACHE.RESet	Reset settings of CTS cache window	181
CTS.CACHE.SETS	Define the number of cache sets	181
CTS.CACHE.Sort	Define sorting for all list commands	181
CTS.CACHE.state	Display settings of CTS cache analysis	182
CTS.CACHE.Tags	Define address mode for cache lines	183
CTS.CACHE.TLBArchitecture	Define architecture for the TLB	184
CTS.CACHE.View	Display the results for the cache analysis	185
CTS.CACHE.ViewBPU	Display statistic for branch prediction unit	189
CTS.CACHE.ViewBus	Display statistics for the bus utilization	190
CTS.CACHE.ViewStalls	Display statistics for idles/stalls	191
CTS.CACHE.WAYS	Define number of cache ways	192
CTS.CACHE.Width	Define width of cache line	193
CTS.CAPTURE	Copy real memory to the virtual memory for CTS	193
CTS.Chart.ChildTREE	Display callee context of a function as chart	194
CTS.Chart.Func	Function activity chart	194
CTS.Chart.INTERRUPT	Display interrupt chart	194

CTS.Chart.INTERRUPTTREE	Display interrupt nesting	195
CTS.Chart.Nesting	Show function nesting at cursor position	195
CTS.Chart.RUNNABLE	Runnable activity chart	195
CTS.Chart.sYmbol	Execution time at different symbols as chart	196
CTS.Chart.TASK	Task activity chart	196
CTS.Chart.TASKINFO	Chart for context ID special messages	197
CTS.Chart.TASKINTR	Display ISR2 time chart (ORTI)	197
CTS.Chart.TASKKernel	Display task time chart with kernel markers (ORTI)	197
CTS.Chart.TASKORINTERRUPT	Task and interrupt activity chart	198
CTS.Chart.TASKSRV	Service routine run-time analysis	198
CTS.Chart.TASKVSINTERRUPT	Time chart of interrupted tasks	198
CTS.Chart.TASKVSINTR	Time chart of task-related interrupts	199
CTS.Chart.TREE	Display function chart as tree view	199
CTS.EXPORT	Export trace data	200
CTS.FixedControl	Execution time at different symbols as chart	200
CTS.GOTO	Select the specified record for CTS (absolute)	200
CTS.INCremental	CTS displays intermediate results while processing	201
CTS.Init	Restart CTS processing	201
CTS.List	List trace contents	202
CTS.ListNesting	Analyze function nesting	204
CTS.Mode	Operation mode	204
CTS.OFF	Switch off trace-based debugging	205
CTS.ON	Switch on trace-based debugging	205
CTS.PROCESS	Process cache analysis	205
CTS.PROfileChart	Profile charts	206
CTS.PROfileChart.CACHE	Display cache analysis results graphically	206
CTS.PROfileChart.sYmbol	Dynamic program behavior as profile chart	207
CTS.PROfileChart.TASK	Task profile chart	208
CTS.PROfileChart.TASKINFO	Profile chart for context ID special messages	208
CTS.PROfileChart.TASKINTR	ISR2 profile chart	208
CTS.PROfileChart.TASKKernel	Task profile chart with kernel markers	209
CTS.PROfileChart.TASKORINTERRUPT	Task and interrupt profile chart	209
CTS.PROfileChart.TASKSRV	OS service routines profile chart	209
CTS.PROfileChart.TASKVSINTR	Task-related interrupts profile chart	210
CTS.RESet	Reset the CTS settings	211
CTS.SELectiveTrace	Trace contains selective trace information	211
CTS.SKIP	Select the specified record for CTS (relative)	211
CTS.SmartTrace	CTS smart trace	212
CTS.state	Display CTS settings	213
CTS.STATistic	Nesting function runtime analysis	215
CTS.STATistic.ChildTREE	Show callee context of a function	215
CTS.STATistic.Func	Nesting function runtime analysis	215
CTS.STATistic.GROUP	Group run-time analysis	216

CTS.STATistic.INTERRUPT	Interrupt statistic	216
CTS.STATistic.INTERRUPTTREE	Interrupt nesting	216
CTS.STATistic.LINKage	Per caller statistic of function	217
CTS.STATistic.MODULE	Code execution broken down by module	217
CTS.STATistic.ParentTREE	Show the call context of a function	217
CTS.STATistic.PROGRAM	Code execution broken down by program	218
CTS.STATistic.RUNNABLE	Runnable runtime analysis	218
CTS.STATistic.sYmbol	Flat run-time analysis	218
CTS.STATistic.TASK	Task statistic	219
CTS.STATistic.TASKINFO	Statistic for context ID special messages	219
CTS.STATistic.TASKINTR	ISR2 statistic (ORTI)	219
CTS.STATistic.TASKKernel	Task statistic with kernel markers	220
CTS.STATistic.TASKORINTERRUPT	Task and interrupt statistic	220
CTS.STATistic.TASKSRV	OS service routines statistic	220
CTS.STATistic.TASKVSINTERRUPT	Statistic of interrupts, task-related	221
CTS.STATistic.TREE	Tree display of nesting function run-time analysis	221
CTS.TAKEOVER	Take memory/registers reconstructed by CTS over to target	222
CTS.UNDO	Revert last CTS command	222
CTS.UseConst	Use constants for the CTS processing	222
CTS.UseDataTrace	Use sampling cycles for CTS	223
CTS.UseFinalContext	Use the CPU registers for CTS	223
CTS.UseFinalMemory	Use memory contents for CTS	224
CTS.UseSIM	Use instruction set simulator for CTS	225
CTS.UseStartMemory	Use virtual memory contents as initial values for CTS	226

## History

---

- 25-Jan-2024    Description for command [COverage.EXPORT.JSONE](#) updated.
- 08-Dec-2023    Removed command **CTS.UseCache**.
- 07-Dec-2023    Removed **CTS.UseReadCycle** and **CTS.UseWriteCycle** commands and replaced them by [CTS.UseDataTrace](#).
- 07-Dec-2023    Removed **CTS.UseVM** command and replaced by [CTS.UseStartMemory](#).
- 04-Dec-2023    Renamed **CTS.UseMemory** to [CTS.UseFinalMemory](#).  
Renamed **CTS.UseRegister** to [CTS.UseFinalContext](#).
- 10-Oct-2023    Clean-up of [CAalyzer](#) description.
- 31-Jul-2023    TriCore DAP streaming via AUTO26 V3 debug cable has been added as a configuration for the [CAalyzer](#) command group.
- 18-Apr-2023    Updated description of [COverage.TreeWalkSETUP](#) and subcommands.
- 20-Mar-2023    Added  $\mu$ Trace (MicroTrace) with MIPI34 whisker to the list of setups that support advanced AutoFocus features to match software since build 156270, DVD 09/2023.
- 24-Jan-2022    Marked the command [COverage.StaticInfo](#) as deprecated.

CACHE

View and modify CPU cache contents

Using the **CACHE** command group, you can view and modify the CPU cache contents. Note that some targets support only a subset of the **CACHE.\*** commands.

When you are trying to execute a command that is not supported for your target, TRACE32 displays the error message “unknown command”.

For targets without accessible CPU cache, the entire **CACHE** command group is locked.

See also

- [■ CACHE.CLEAN](#)  
[■ CACHE.GET](#)  
[■ CACHE.ListFunc](#)  
[■ CACHE.LOAD](#)  
[■ CACHE.UNLOAD](#)
- [■ CACHE.ComPare](#)  
[■ CACHE.INFO](#)  
[■ CACHE.ListLine](#)  
[■ CACHE.RELOAD](#)  
[■ CACHE.view](#)
- [■ CACHE.DUMP](#)  
[■ CACHE.INVALIDATE](#)  
[■ CACHE.ListModule](#)  
[■ CACHE.SAVE](#)
- [■ CACHE.FLUSH](#)  
[■ CACHE.List](#)  
[■ CACHE.ListVar](#)  
[■ CACHE.SNAPSHOT](#)
- ▲ 'CACHE Functions' in 'General Function Reference'

CACHE.CLEAN

Clean CACHE

Format:

CACHE.CLEAN <cache>

<cache>:

IC | DC | L2

Writes back modified (dirty) lines to the next cache level or memory. Only the specified cache is affected.

In case the operation is not supported by the CPU, the result will be a “function not implemented” error message.

See also

- [■ CACHE](#)
- [■ CACHE.FLUSH](#)
- [■ CACHE.INVALIDATE](#)
- [■ CACHE.view](#)

Format:	<b>CACHE.ComPare</b> <i>&lt;cache&gt;</i>
<i>&lt;cache&gt;</i> :	<b>IC   DC   L2</b>

Compares CACHE contents with memory contents.

Example:

```
CACHE.ComPare DC          ; compare contents of the data CACHE with the
                           ; memory
```

See also


- [CACHE](#)
- [CACHE.view](#)
- ▲ 'Release Information' in 'Legacy Release History'

Format: **CACHE.DUMP** <cache> [/<options>]

<cache>: **IC | DC | L2**

<options>: **ALL | RAW | ValidOnly**

Displays a hex dump of the CACHE contents. This command extracts useful information from the raw data read from the target and present them in a table in sequential order of the sets and ways. By default, only valid cache lines are presented.

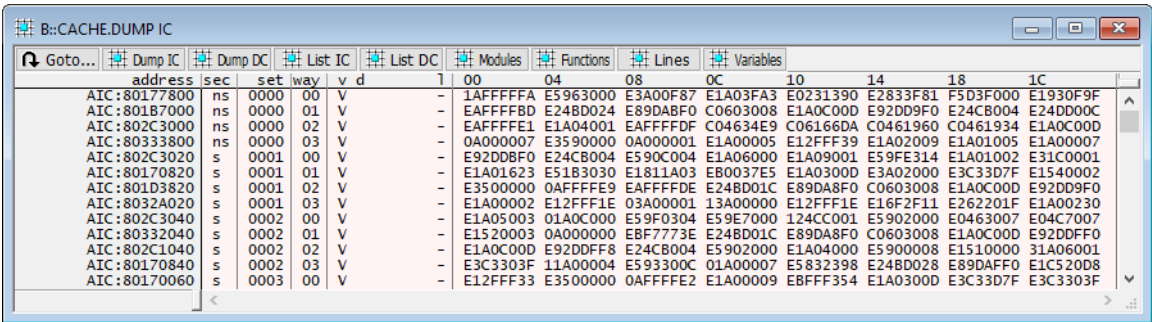

**RAW** **Dump also the raw data.** If the option **RAW** is used, all cache lines, no matter valid or not, will be displayed.

The **CACHE.DUMP** window typically involves multiple columns, some of which are used to present architecture-specific attributes of the cache lines. In the following table, we describe some commonly presented attributes. Please refer to the design manual of the respective architecture to understand the detailed meaning of these attributes.

Attribute	Description
<b>Valid</b>	<ul style="list-style-type: none"> <li>Column Name: "v".</li> <li>Value "V" : valid.</li> <li>Value "-" : invalid.</li> </ul>
<b>Dirty</b>	<ul style="list-style-type: none"> <li>Column Name: "d".</li> <li>Value "D" : dirty.</li> <li>Value "-" : not dirty.</li> </ul>
<b>Secure</b>	<ul style="list-style-type: none"> <li>Column Name: "sec".</li> <li>Value "s" : secure.</li> <li>Value "ns" : non-secure.</li> </ul>

Attribute	Description
Shared	<ul style="list-style-type: none"><li>Column Name: “s”.</li><li>Value “S”: shared.</li><li>value “-”: non-shared.</li></ul>
Coherence	<ul style="list-style-type: none"><li>Column Name: “c”</li><li>The possible values of this column depend on the cache coherence protocol used by the architecture. E.g, for the MOESI protocol:<ul style="list-style-type: none"><li>Value “M” : modified.</li><li>Value “O” : owned.</li><li>Value “E” : exclusive.</li><li>Value “S” : shared.</li><li>Value “I” : invalid.</li></ul></li></ul>

See also

- [CACHE](#)
- [CACHE.view](#)
- ▲ ['Release Information' in 'Legacy Release History'](#)

CACHE.FLUSH

Clean and invalidate CACHE

Format:	<b>CACHE.FLUSH</b> <i>&lt;cache&gt;</i>
<i>&lt;cache&gt;</i> :	<b>IC   DC   L2</b>

Writes back modified (dirty) lines to the next cache level or memory and invalidate the entire cache. Only the specified cache is affected.

In case the operation is not supported by the CPU, the result will be a “function not implemented” error message.

See also

- [CACHE](#)
- [CACHE.CLEAN](#)
- [CACHE.INVALIDATE](#)
- [CACHE.view](#)



Format:

CACHE.GET

Synchronizes the TRACE32 software with the target on the entire cache. TRACE32 loads all cache lines for which it does not have up-to-date data. For diagnostic purposes only.

Previously loaded data are not explicitly reloaded, unless they are marked for reload by the **CACHE.RELOAD** command executed before **CACHE.GET**.

See also

[■ CACHE](#)[■ CACHE.RELOAD](#)[■ CACHE.view](#)

CACHE.INFO

View all information related to an address

Format:

CACHE.INFO.<sub\_cmd> <address>

<sub\_cmd>:

create | scanSTART | scanRESUME | scanSTOP  
TaskPageTable <address> <task>

Displays all information related to a physical address. If the given address is logical, TRACE32 first translates it into physical. The information contains:

- All cache lines that cache the physical address, including both instruction and data cache.
- All TLB entries that contain translation rules for the physical address.
- All mmu entries that contain translation rules for the physical address (or all pages mapped to the given physical address), including both the task and kernel MMU entries.

create	Views all translation information related to an address.
scanSTART	Starts a scan in all MMU page tables for entries that contain translation rules for the physical address.
scanRESUME	Resumes the scan stopped with <b>scanSTOP</b> .
scanSTOP	Stops the scan.
TaskPageTable	Displays all translation information related to a give address and task page table. Refer to <a href="#">MMU.INFO.TaskPageTable</a> for more information.

See also

[■ CACHE](#)[■ CACHE.view](#)

Format:

CACHE.INVALIDATE <cache>

<cache>:

IC | DC | L2

Invalidates the entire cache. Only the specified cache is affected. In case the operation is not supported by the CPU, the result will be a “function not implemented” error message.

See also

■ [CACHE](#)

■ [CACHE.CLEAN](#)

■ [CACHE.FLUSH](#)

■ [CACHE.view](#)

CACHE.List

List CACHE contents


Format:

CACHE.List <cache>

<cache>:

IC | DC | L2

Displays a list of the CACHE contents.

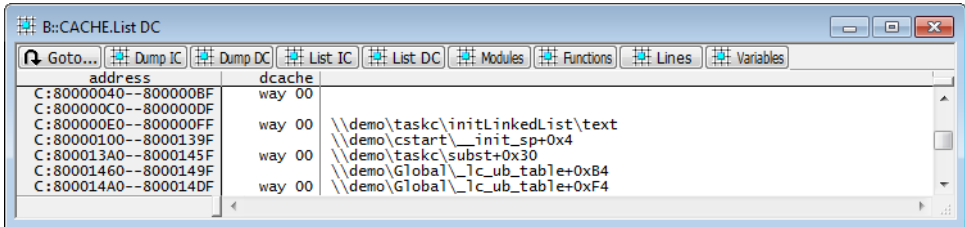

See also

■ [CACHE](#)

■ [CACHE.view](#)


Format:

CACHE.ListFunc <cache>


<cache>:

IC | DC | L2

Displays how much of each function is cached.

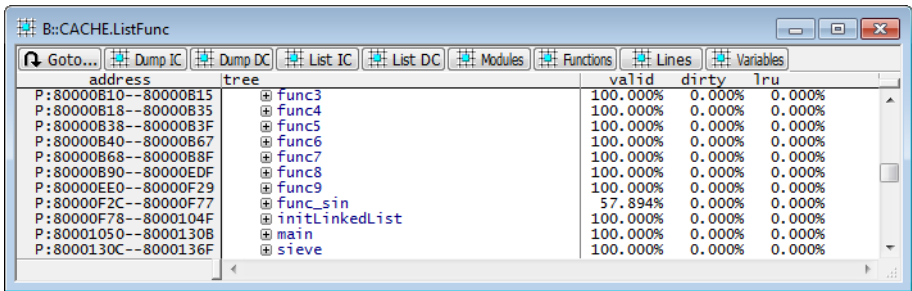

Detailed information about a function is displayed by double-clicking the function.

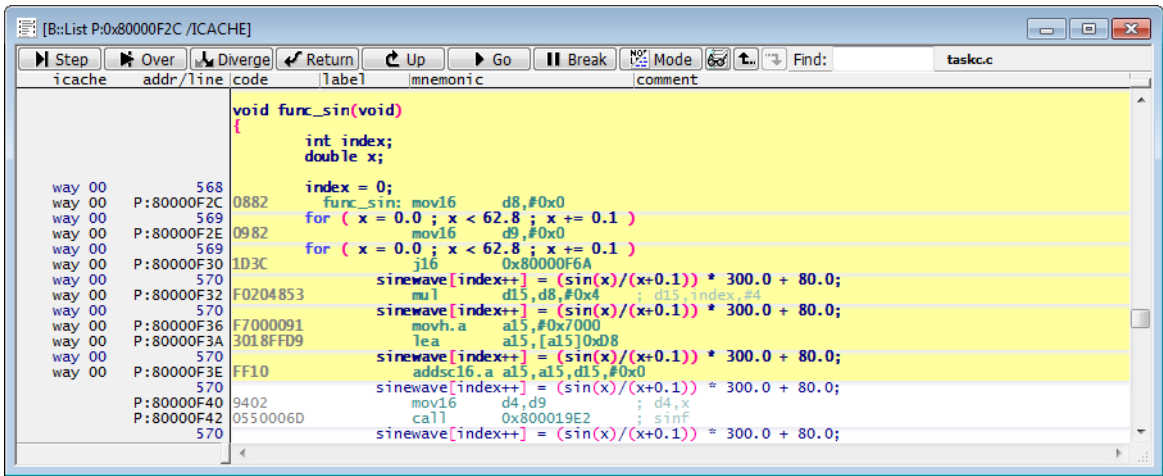

See also

- CACHE
- CACHE.view


Format:

CACHE.ListLine <cache>

<cache>:

IC | DC | L2

Displays how much of each high-level source code line is cached.

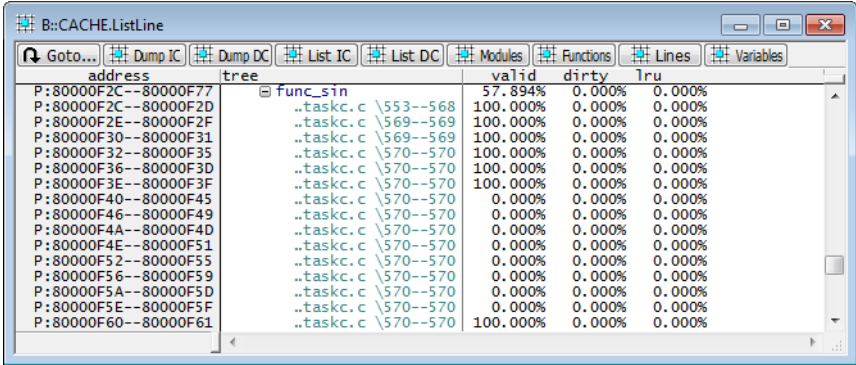

Detailed information about a line is displayed by double-clicking the line.

See also

- CACHE
- CACHE.view

Format:

CACHE.ListModule <cache>

<cache>:

IC | DC | L2

Displays how much of each module is cached.

See also

- CACHE
- CACHE.view


Format:

CACHE.ListVar <cache> [<range> | <address>]


<cache>:

IC | DC | L2

Displays all cached variables.

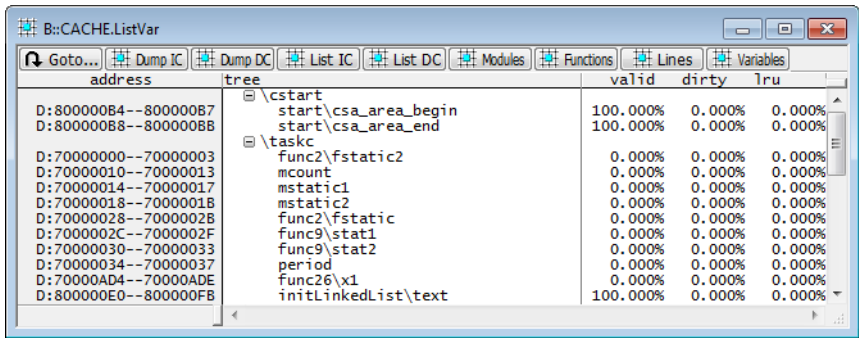

Detailed information about a variable is displayed by double-clicking the variable.

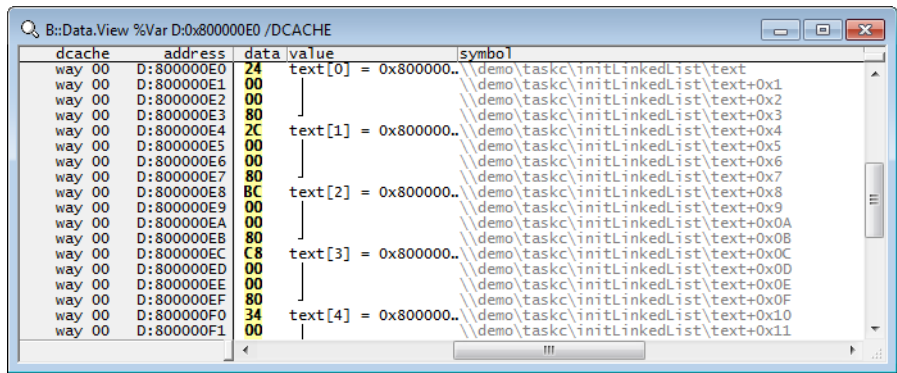

See also

- [CACHE](#)
- [CACHE.view](#)

Format: **CACHE.LOAD** [IC | DC | L2] <file.cd>

Loads the cache contents previously stored with **CACHE.SAVE**.

This command is not supported for all target processor architectures.

### See also

■ [CACHE](#)

■ [CACHE.view](#)

Format: **CACHE.RELOAD**

Deletes all cache data that TRACE32 already loaded. Cache data that is needed afterwards will be reloaded from the target. For diagnostic purpose only.

This command can be useful when the cache data are loaded during a subsequent operation that needs them, such as when executing **CACHE.List** or **CACHE.GET** command. It means that **Cache.RELOAD** does not trigger any immediate cache read operation but simply marks the data for reloading.

### See also

■ [CACHE](#)

■ [CACHE.GET](#)

■ [CACHE.view](#)

Format: **CACHE.SAVE** [IC | DC | L2] <file.cd>

The cache contents are stored to a selected file. The file can be loaded for post processing with the command **CACHE.LOAD**.

### See also

■ [CACHE](#)

■ [CACHE.view](#)

Format: **CACHE.SNAPSHOT** <cache> [/ComPare [/<cmp\_opt>]]

<cache>: **IC | DC | L2**

<cmp\_opt>: **AREA <area> | VERBOSE | RAW**


This command helps to investigate how the cache changes, e.g. before and after a function call. If the command is executed without option, it takes a snapshot of the specified cache.

If the command is executed with option /ComPare, it compares the previously taken snapshot to the current cache and prints the differences into the message **AREA**. Destination area and level of detail can be configured using the options outlined below. Without detail option, the output contains event and affected address.


<b>AREA &lt;area&gt;</b>	The message AREA with name <area> will receive the comparison result.
<b>VERBOSE</b>	Additionally print cache set and cache way of the affected cache line.
<b>RAW</b>	Additionally print cache set and way, all status flags, and old and new data stored in the affected cache line.


Examples:

```
CACHE.SNAPSHOT /ComPare
```

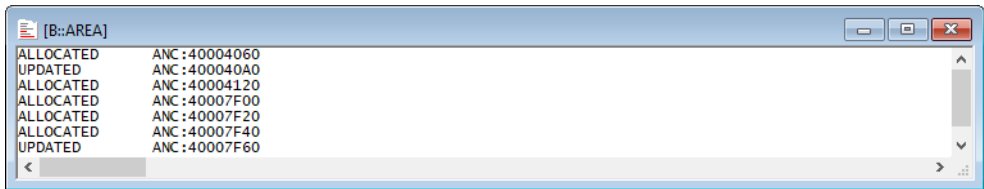

```
CACHE.SNAPSHOT /ComPare /VERBOSE
```

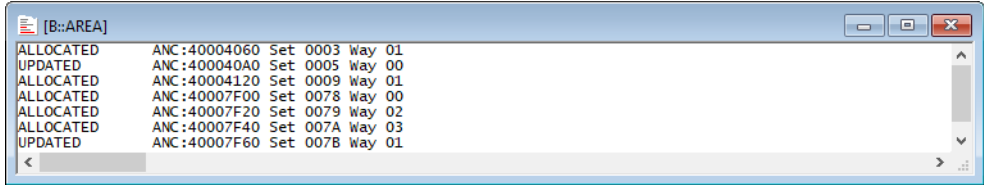

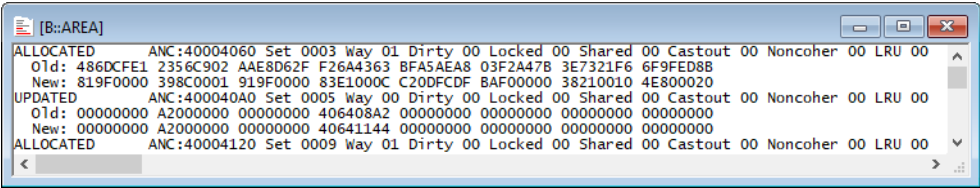

See also

- [CACHE](#)
- [CACHE.view](#)

CACHE.UNLOAD

Unload previously loaded cache contents

Format: **CACHE.UNLOAD [IC | DC | L2]**

Unloads cache contents previously loaded with the command [CACHE.LOAD](#).

See also


- [CACHE](#)
- [CACHE.view](#)



Format:

CACHE.view

Displays all cache registers (not available for all processor architectures).

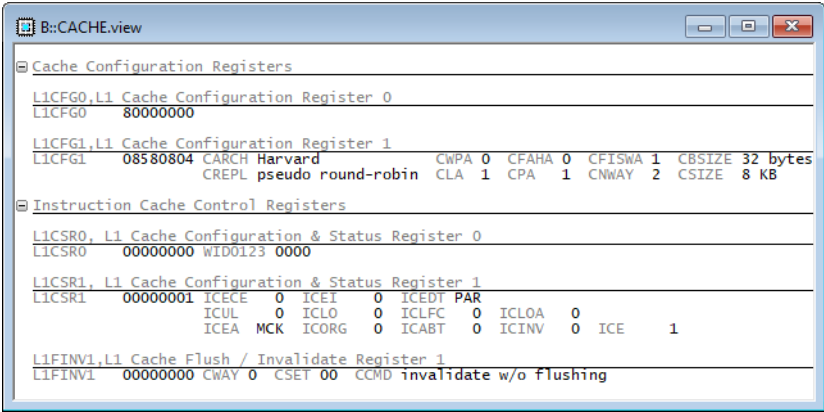

See also

- [CACHE](#)
  - [CACHE.CLEAN](#)
  - [CACHE.FLUSH](#)
  - [CACHE.GET](#)
  - [CACHE.List](#)
  - [CACHE.ListFunc](#)
  - [CACHE.ListVar](#)
  - [CACHE.LOAD](#)
  - [CACHE.SNAPSHOT](#)
  - [CACHE.UNLOAD](#)
- [CACHE.ComPare](#)
  - [CACHE.INFO](#)
  - [CACHE.ListLine](#)
  - [CACHE.RELOAD](#)
- [CACHE.DUMP](#)
  - [CACHE.INVALIDATE](#)
  - [CACHE.ListModule](#)
  - [CACHE.SAVE](#)
- ▲ 'Release Information' in 'Legacy Release History'

**CAnalyzer** (Compact Analyzer) is the command group that controls the trace of the following:

- **TRACE32 CombiProbe**

The TRACE32 CombiProbe can be used for the following type of trace information:

- Any type of trace information generated by a STM or a comparable trace generation unit.
- All types of trace information generated by the Cortex-M trace infrastructure.
- MCDS data exported from a AURIX™ TriCore™ microcontroller via DAP streaming.

Further information is provided by “[CombiProbe for Cortex-M User's Guide](#)” (combiprobe\_cortexm.pdf), by “[Intel® x86/x64 Debugger](#)” (debugger\_x86.pdf) or by “[MCDS User's Guide](#)” (mcds\_user.pdf).

- **μTrace (MicroTrace)**

The μTrace (MicroTrace) can record all types of trace information generated by the Cortex-M trace infrastructure.

Further information is provided by “[MicroTrace for Cortex-M User's Guide](#)” (microtrace\_cortexm.pdf).

- **Serial Wire Viewer (SWV) trace via Debug Cable**

With newer PowerDebug Module/Debug Cable configurations, TRACE32 can record ITM-generated trace information that is exported via the SWO (Serial Wire Output) pin of the debug connector. The trace memory is provided by the PowerDebug Module.

This is supported by the following debug cables:

- IDC20A DebugCable V5b (formerly ARM DebugCable V5b) and all its [successors](#).
- AUTO26 Debug Cable V2 (formerly Automotive-Pro Debug Cable) and all its [successors](#).

A PowerDebug module with trace memory is additionally required:

- PowerDebug PRO and all its [successors](#).
- PowerDebug X50 and all its [successors](#).

- **TriCore DAP streaming via Debug Cable**

With newer PowerDebug Module/Debug Cable configurations, TRACE32 can record trace data streamed off-chip via the DAP interface.

This is supported by the following debug cable:

- AUTO26 Debug Cable V3 and all its **successors**.

A PowerDebug module with trace memory is additionally required:


- PowerDebug PRO and all its **successors**.
- PowerDebug X50 and all its **successors**.

Further information is provided by “**MCDS User’s Guide**” (mcds\_user.pdf).

The amount of trace memory can be extended by using host memory (CAalyzer STREAM mode, see **CAalyzer.Mode STREAM**).

For selecting and configuring the trace method CAalyzer, use the TRACE32 command line or a PRACTICE script (\*.cmm) or the **CAalyzer.state** window [A].

Alternatively, use the **Trace.state** window: click the option **CAalyzer** or execute the command **Trace.METHOD CAalyzer** in order to select the trace method **CAalyzer** [B].

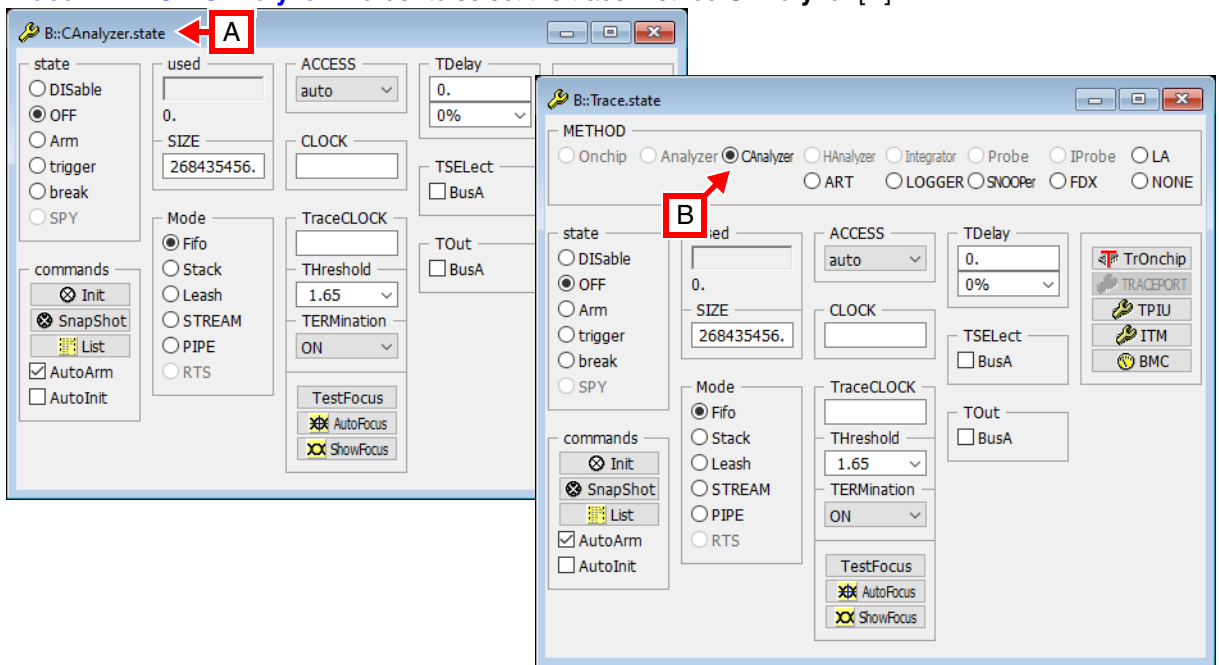

The chapter “**CAalyzer - Compact Analyzer specific Trace Commands**”, page 28 describes the CAalyzer-specific configuration commands. While the chapter “**Generic CAalyzer Trace Commands**”, page 43 lists the CAalyzer trace analysis and display commands, which are shared with other TRACE32 trace methods.

#### See also

##### ■ Trace.METHOD

- ▲ ‘CAalyzer - Compact Analyzer specific Trace Commands’ in ‘General Commands Reference Guide C’
- ▲ ‘Generic CAalyzer Trace Commands’ in ‘General Commands Reference Guide C’
- ▲ ‘Release Information’ in ‘Legacy Release History’

CAnalyzer.<specific\_cmds>

Overview of CAnalyzer-specific commands

See also

- CAnalyzer.SAMPLE
  - CAnalyzer.ShowFocusClockEye
  - <trace>.DRAW
  - CAnalyzer.PipeWRITE
  - CAnalyzer.TOut
  - CAnalyzer.WRITE
- CAnalyzer.ShowFocus
  - CAnalyzer.ShowFocusEye
  - CAnalyzer.DecodeMode
  - CAnalyzer.TERMination
  - CAnalyzer.TraceCLOCK
- ▲ 'CAnalyzer' in 'General Commands Reference Guide C'

CAnalyzer.CLOCKDelay

Set clock delay

Format:

CAnalyzer.CLOCKDelay <delay>

<delay>:

Auto | None | Small | MEDium | Large | MAXimum

Default: Auto. Sets the clock delay.

This command exists for setups with the CombiProbe and a whisker other than the MIPI20T-HS whisker. In this case, the command sets the configurable delay between the TRACECLK signal and the registers that sample the trace data, while the data delays cannot be configured.

If available, use [CAnalyzer.SAMPLE](#) for more precise control of the individual sample points.

CAnalyzer.CLOSE

Close named pipes

Format:

CAnalyzer.CLOSE

Closes all named pipes defined with [CAnalyzer.PipeWRITE](#).

Format:	<b>CAnalyzer.DecodeMode</b> <i>&lt;format&gt;</i>
<i>&lt;format&gt;</i> :	<b>AUTO</b> <b>SDTI</b> <b>STP</b> <b>STP64</b> <b>STPV2</b> <b>STPV2LE</b> <b>SWV</b> <b>CSITM</b> <b>CSETM</b> <b>CSSTM</b>

Default: AUTO.

This command can be used to explicitly define how the recorded trace data should be decoded. In general, the CombiProbe will try to use the correct setting automatically, dependent on the CPU selection and enabled debug features (like ITM for example). Nevertheless, it is possible that you explicitly need to specify the trace decoding in cases where the debugger chooses the wrong defaults; for example if you are debugging an ARM core, which implements an ITM and at the same time an STP module and you now need to specify which of the two outputs you are actually recording.

<b>AUTO</b>	Automatically derive settings. The chosen mode depends on <b>SYStem.CPU</b> , the <b>SYStem.CONFIG</b> settings and <b>CAnalyzer.TraceCONNECT</b> .
<b>SDTI</b>	System Debug Trace Interface (SDTI) by Texas Instruments.
<b>STP</b>	STP protocol (MIPI STPv1, D32 packets).
<b>STP64</b>	STP64 protocol (MIPI STPv1, D64 packets).
<b>STPV2</b>	STPv2 protocol (MIPI STPv2, big endian mode).
<b>STPV2LE</b>	STPv2 protocol (MIPI STPv2, little endian mode).
<b>SWV</b> ITM (deprecated)	ITM data transferred via Serial Wire Output.
<b>CSITM</b>	ITM data transferred via a TPIU continuous mode. The trace ID is taken from the ITM component configuration.

## CSETM

ETM + optionally ITM data transferred via TPIU continuous mode.  
The trace IDs are taken from the ETM and ITM component configuration.

## CSSTM

STM data transferred via TPIU continuous mode.  
The trace ID is taken from the STM component configuration.

### See also

■ [CAalyzer.<specific\\_cmds>](#)

## CAalyzer.I2C

## I2C control

Format: **CAalyzer.I2C.<sub\_cmd>**

Synonym for the [I2C](#) command group. Only makes sense if your debug hardware supports accessing an I2C bus on your target (e.g. CombiProbe with MIPI60-Cv2).

## CAalyzer.PipeLOAD

## Load a previously saved file

Format: **CAalyzer.PipeLOAD <file>**

Loads a file previously saved with [CAalyzer.PipeSAVE](#). Please note that the decoding will only work if your trace setup matches the setup you used when you did save the data via [CAalyzer.PipeSAVE](#) (selected CPU, trace component setup,...).

This command is used in conjunction with [CAalyzer.Mode PIPE](#).

## CAalyzer.PipeRePlay

## Replay a previously recorded stream

Format: **CAalyzer.PipeRePlay <file>**

Replays a previously recorded stream of data, which was stored via [CAalyzer.PipeSAVE](#).

This command is useful if you want to develop a PIPE mode processing DLL. Additionally you might also “replay” artificially produced mock-up data to test your DLL.

This command is used in conjunction with [CAalyzer.Mode PIPE](#).

CAalyzer.PipeSAVE

Define a file that stores received data

Format:

CAalyzer.PipeSAVE <file>

Defines a file into which all received data is stored in an **unprocessed** manner.

This command is used in conjunction with [CAalyzer.Mode PIPE](#). It might be used for developing PIPE mode processing DLLs (see [CAalyzer.PipeRePlay](#)).

[CAalyzer.Mode STREAM](#) offers a similar functionality.

CAalyzer.PipeWRITE

Define a named pipe as trace sink

Format:

CAalyzer.PipeWRITE <pipe\_name> [/<options>]

<options>:

ChannelID <channel\_id>  
MasterID <master\_id>  
XtiMaster DSP | CPU | MCU (XTlv2)  
XtiMaster DSP | CPU1 | CPU2 (SDTI)  
Payload

This command is used to define a Windows or Unix named pipe as trace sink. Up to 8 named pipes can be defined as trace sinks simultaneously.

The named pipe has to be created by the receiving application, before you can connect to the named pipe. If the pipe is not already connected to a receiving application, the debugger software will report an error.

If you use this command without specifying a pipe name, all open pipes currently used as trace sinks are closed.

The options are the same as for the [CAalyzer.WRITE](#) command.

See also

- [CAalyzer.<specific\\_cmds>](#)

Format:	CAnalyzer.SAMPLE [ <i>&lt;channel&gt;</i> ] <i>&lt;time&gt;</i>
<i>&lt;channel&gt;</i> : (parallel)	D0   D1   D2   D3   D4   D5   D6   D7
<i>&lt;channel&gt;</i> : (SWV)	SWO0   SWO1   SWO2   SWO3   SWO4   SWO5   SWO6   SWO7

Use this command to manually configure the sample times of the trace channels. It is typically used to restore values previously stored using the **Store...** button of the [CAnalyzer.ShowFocus](#) window or with the [STore CAnalyzerFocus](#) command.

The availability of this command depends on the plugged hardware. It is only available in the following scenarios:

- CombiProbe with MIPI20T-HS whisker
- CombiProbe 2 or  $\mu$ Trace (MicroTrace) with MIPI20T-HS or MIPI34 whisker
- CombiProbe 2 with MIPI60 whisker (parallel only)
- PowerDebug PRO/E50/X50 with ARM Debug Cable v5 (SWV only)

<i>&lt;channel&gt;</i>	Trace signal to be configured If the parameter is omitted, all signals are configured with the <i>&lt;time&gt;</i> setting.
<i>&lt;time&gt;</i> (parallel)	<b>Parameter Type:</b> <a href="#">Float</a> . The value is interpreted as time in nanoseconds. Sample time offset to trace clock: <ul style="list-style-type: none"><li>• Positive value: Data is sampled after the clock edge.</li><li>• Negative value: Data is sampled before the clock edge.</li></ul>
<i>&lt;time&gt;</i> (SWV)	<b>Parameter Type:</b> <a href="#">Float</a> . The value is interpreted as time in nanoseconds. Sample time offset to nominal sample point derived from <a href="#">CAnalyzer.TraceCLOCK</a> setting: <ul style="list-style-type: none"><li>• Positive value: Data is sampled after nominal sample point.</li><li>• Negative value: Data is sampled before nominal sample point.</li></ul>



Examples:

```
; Set the delay for all channels to 0
CAalyzer.SAMPLE , 0.0

; Set the delay for the D0 line to 0.4 ns
CAalyzer.SAMPLE D0 0.4
```

See also

- [CAalyzer.<specific\\_cmds>](#)
- ▲ ['Release Information' in 'Legacy Release History'](#)

CAalyzer.ShowFocus

Display data eye

Format:	<b>CAalyzer.ShowFocus</b> [ <i>&lt;channels&gt;</i> ...]
<i>&lt;channels&gt;</i> : (parallel)	<b>D0   D1   D2   D3   D4   D5   D6   D7</b> <b>CLK</b>
<i>&lt;channels&gt;</i> : (SWV)	<b>SW00   SW01   SW02   SW03   SW04   SW05   SW06   SW07</b> <b>SWOSTOP</b>


Use this command to get a quick overview of the data eyes for all signals of your trace port.

The availability of this command depends on the plugged hardware. It is only available in the following scenarios:

- CombiProbe with MIPI20T-HS whisker
- CombiProbe 2 or µTrace (MicroTrace) with MIPI20T-HS or MIPI34 whisker
- CombiProbe 2 with MIPI60 whisker (parallel only)
- PowerDebug PRO/E50/X50 with ARM Debug Cable v5 (SWV only)


If used without any arguments, the channels are chosen automatically based on the current **TPIU** settings.

## Result for parallel trace:

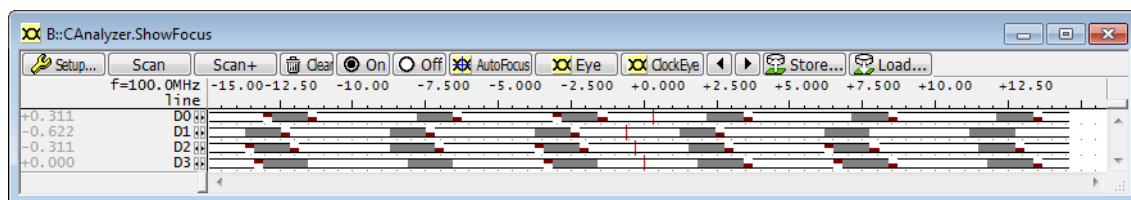

The horizontal axis is the time difference from the edge of the TRACECLK signal. Each row corresponds to one data channel **D0**, **D1**, etc. The sample point is also displayed numerically at the left of the window (in nanoseconds). Positive values mean that the data line is sampled after the rising clock edge.

## Result for SWV trace:

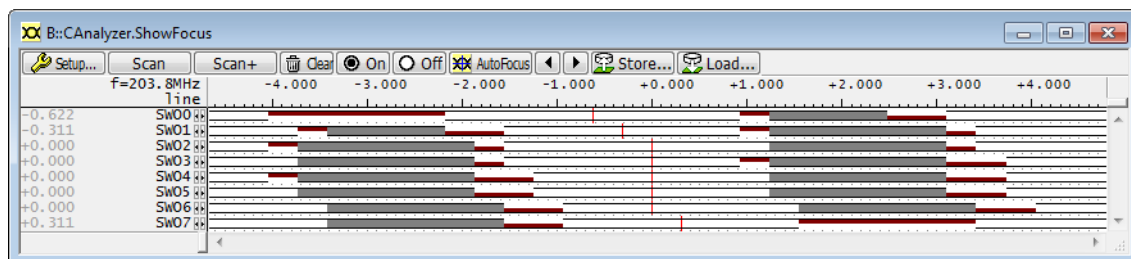



With SWV trace, there is only a single data line. This line is separated into eight virtual channels, one for each bit of a transmitted byte. For each channel, the delay 0 refers to the “ideal” sample point that is derived from the [CAnalyzer.TraceCLOCK](#) setting.

## Color Legend

- **White** areas represent periods where the corresponding data line was stable.
- **Gray** areas indicate that changes of the data line were detected for both rising and falling clock edges.
- Parallel trace: **Red** areas show that the data line changed only on rising or falling clock edges, not both.
- SWV and parallel trace: **Red** lines indicate the sample points for each data line.

Description of Buttons in the CAnalyzer.ShowFocus Window

The local buttons of the CAnalyzer.ShowFocus window have the following functions:

Setup...	Open CAnalyzer.state window to configure the trace.
Scan	Perform a CAnalyzer.TestFocus scan. This replaces the currently displayed data with a new scan of a test pattern.
Scan+	Perform a CAnalyzer.TestFocus /Accumulate scan. This works like Scan, but adds to the existing data.
Clear	Clear the currently displayed data.
On	Enable continuous capture. No specific test pattern is generated, but the capture can run in parallel to the recording of normal trace data. The CAnalyzer.ShowFocus window updates continuously.
Off	Disable continuous capture.
AutoFocus	Perform a CAnalyzer.AutoFocus scan.
Eye	Open a CAnalyzer.ShowFocusEye window.
ClockEye	Open a CAnalyzer.ShowFocusClockEye window.
Store...	Save the current configuration to a file (STORE <file> CAnalyzerFocus).
Load...	Load a configuration from a file (DO <file>).
	Move all sampling points one step to the left.
	Move all sampling points one step to the right.

See also

- CAnalyzer.<specific\_cmds>
- ▲ 'Release Information' in 'Legacy Release History'


Format:

CAnalyzer.ShowFocusClockEye

CAnalyzer.ShowFocusClockEye shows the clock eye. The data is captured by the [CAnalyzer.AutoFocus](#), [CAnalyzer.TestFocusClockEye](#) and [CAnalyzer.TestFocusEye](#) commands.

The availability of this command depends on the plugged hardware. It is only available in the following scenarios:

- CombiProbe with MIPI20T-HS whisker
- CombiProbe 2 or  $\mu$ Trace (MicroTrace) with MIPI20T-HS, MIPI34 or MIPI60 whisker

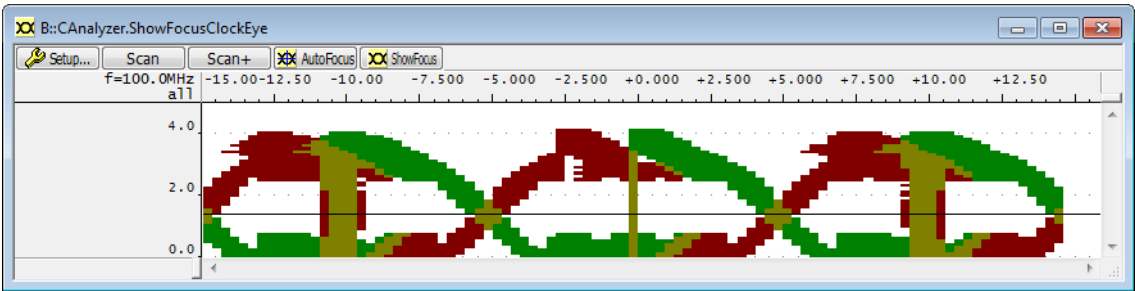

The horizontal axis represents time, measured in nanoseconds. The vertical axis represents the voltage. The visible voltage range depends on the hardware capabilities of the whisker.

To generate this view, the clock signal is sampled using the clock signal itself as the trigger. For example, a white area around the coordinate (2.0 V, 7.5 ns) means that there were no recorded clock crossings exactly 7.5 ns apart when using a 2.0 V threshold.

Color Legend

- **White** areas indicate that there were no pairs of clock crossings.
- **Green** indicates that the reference clock crossing at  $t = 0$  was rising.
- **Red** indicates that the reference clock crossing at  $t = 0$  was falling.
- **Olive green** areas indicate that both occurred.

Description of Buttons in the CAnalyzer.ShowFocusClockEye Window

Please see [CAnalyzer.ShowFocusEye](#).

See also

- [CAnalyzer.<specific\\_cmds>](#)
- ▲ ['Release Information' in 'Legacy Release History'](#)

Format:

CAnalyzer.ShowFocusEye [<channels> ...]

<channels>:


D0 | D1 | D2 | D3 | D4 | D5 | D6 | D7

CAnalyzer.ShowFocusEye shows the data eyes. The data is captured by the CAnalyzer.AutoFocus, CAnalyzer.TestFocusClockEye and CAnalyzer.TestFocusEye commands.


The availability of this command depends on the plugged hardware. It is only available in the following scenarios:

- CombiProbe with MIPI20T-HS whisker
- CombiProbe 2 or  $\mu$ Trace (MicroTrace) with MIPI20T-HS, MIPI34or MIPI60 whisker

This screenshot shows multiple eyes overlaid on each other.

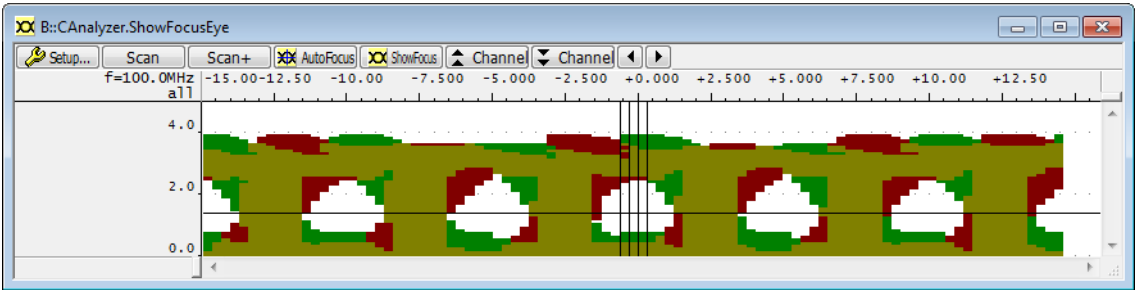

This screenshot shows a single data eye.

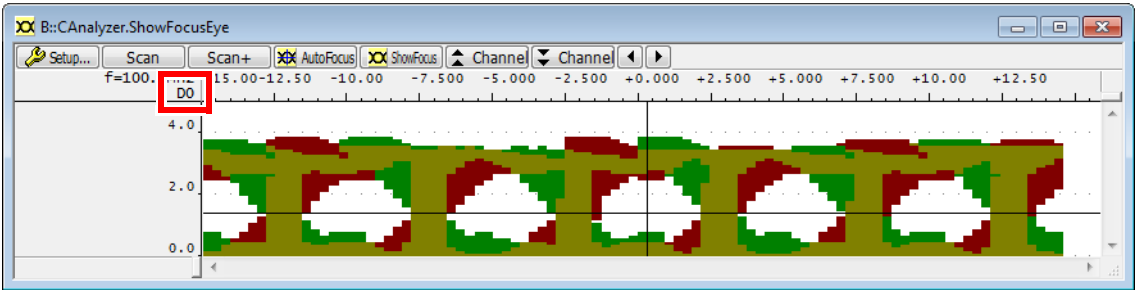



Color Legend

- **White** areas indicate that the data was stable (no changes were observed).
- **Green** indicates that the data changed in response to a rising clock edge at  $t = 0$ .
- **Red** indicates that the data changed in response to a falling clock edge at  $t = 0$ .
- **Olive green** areas indicate that both occurred.

Description of Buttons in the CAnalyzer.ShowFocusEye Window

The toolbar buttons of the CAnalyzer.ShowFocusEye window have the following functions:

Setup...	Open CAnalyzer.state window to configure the trace.
Scan	Perform a CAnalyzer.TestFocusEye scan. This replaces the currently displayed data with a new scan of a test pattern.
Scan+	Perform a CAnalyzer.TestFocusEye /Accumulate scan. This works like Scan, but adds to the existing data.
AutoFocus	Perform a CAnalyzer.AutoFocus scan.
ShowFocus	Open a CAnalyzer.ShowFocus window.
Channel up/down	Switch between displayed channels. The default view shows all selected channels overlaid onto each other.
	Move the sampling points of all visible channels one step to the left.
	Move the sampling points of all visible channels one step to the right.

See also

■ CAnalyzer.<specific\_cmds>

Format: CAnalyzer.TERMination [ON | OFF | ALways]

Configures the termination of the trace data and clock signals (TRACED0 to TRACED3 and TRACECLK) on the MIPI20T-HS whisker.

This command is only available if a MIPI20T-HS whisker is plugged. This whisker has a switchable 100 Ohm parallel termination to GND. It has no effect in Serial Wire Viewer (SWV) mode.

- ON
- Termination is enabled while the trace is armed.  
This is the default and recommended setting. Parallel termination reduces overshoots of the electrical signals.
- OFF
- Termination is disabled completely.  
Use this if your target’s drivers are too weak to drive against the termination.
- ALways
- Termination is always enabled.

See also

■ CAnalyzer.<specific\_cmds>

▲ ‘Release Information’ in ‘Legacy Release History’

CAnalyzer.TOut

Route trigger to PODBUS (CombiProbe/μTrace)

Format: CAnalyzer.TOut BusA ON | OFF

When the **BusA** check box is enabled, the CombiProbe/μTrace (MicroTrace) will send out a trigger on the PODBUS, as soon as a trigger event is detected in the trace data.

```
Trace.METHOD.CAnalyzer ; select the trace method Compact Analyzer
Trace.state              ; open the Trace.state window
Trace.TOut BusA ON       ; enable the BusA check box
```

For information about PODBUS devices, see "[Interaction between independent PODBUS devices](#)".

See also

■ CAnalyzer.<specific\_cmds>

Format:

CAnalyzer.TraceCLOCK <frequency>  
CAnalyzer.ExportClock <frequency> (deprecated)

This command is used to *manually* configure the frequency of the trace port.

The interpretation of this value is different depending on whether a parallel or a SWV trace port is used.

Interpretation when parallel trace is used

With parallel trace, this setting is optional and does not affect the capture of data. However, it is used to interpolate the timestamps in the recorded trace data where multiple logical records share a physical timestamp. Set the value to zero (0.0) to disable timestamp interpolation.

The given frequency must be the bit rate of the trace port. Since all parallel trace ports supported by the CAnalyzer operate in double data rate (DDR) mode, this is twice the frequency of the trace clock pin.

The command **CAnalyzer.AutoFocus** automatically sets this setting.

Interpretation when SWV trace is used

The bit rate of the Serial Wire Output (SWO) signal is used as frequency.

<frequency> (MIPI34 whisker and ARM Debug Cable v5)	Frequency range: <ul style="list-style-type: none"><li>Minimum: 60 kHz</li><li>Maximum: 100 MHz</li></ul>
<frequency> (MIPI20T-HS whisker)	Frequency range: <ul style="list-style-type: none"><li>Minimum: 60 kHz</li><li>Maximum: 200 MHz</li></ul>

You might need to select an appropriate SWO clock divider to remain in the allowed range. For an example, see **TPIU.SWVPrescaler**.

Examples:

```
CAnalyzer.TraceCLOCK 32MHz
```



To *auto-detect* the bit rate, click the **AutoFocus** button in the **CAAnalyzer** window or type at the command line:

```
CAalyzer.AutoFocus
```

See also

■ [CAalyzer.<specific\\_cmds>](#)

CAAnalyzer.TracePORT

Select which trace port is used

Format:	CAAnalyzer.TracePORT DEFault   TracePortA   TracePortB
---------	--

Selects which trace port is used for recording trace data. This command only makes sense if you have **two** whiskers connected to a **CombiProbe**.

DEFault	Use same whisker for tracing as is used for debugging. The debug port can be selected with the command <b>SYStem.CONFIG DEBUGPORT</b> . <b>TracePortA</b> is selected per default if only one debug port is available.
TracePortA	Select whisker A as trace port.
TracePortB	Select whisker B as trace port.

Format:	<b>CAalyzer.WRITE</b> <file> [/<options>]
<options>:	<b>ChannelID</b> <channel_id> <b>MasterID</b> <master_id> <b>XtiMaster DSP   CPU   MCU</b> (XTlv2) <b>XtiMaster DSP   CPU1   CPU2</b> (SDTI) <b>Payload</b>

This command is used to define a file as trace sink. Up to 8 files can be specified as trace sinks simultaneously.

<file>	If you use this command without specifying a <file> name, all open files currently used as trace sinks are closed.
<b>ChannelID</b> <b>MasterID</b>	If you record MIPIs STP trace (System Trace Protocol), then the options <b>/ChannelID</b> and <b>/MasterID</b> are available. You can use this options to only store messages into the file, which match the given ChannelID or MasterID. You can specify a single value, a range of values or a bitmask for the <b>ChannelID</b> and <b>MasterID</b> .  If you record ARMs ITM trace, the <b>MasterID</b> option is not available, because ITM does not use master IDs.
<b>Payload</b>	The <b>/Payload</b> option specifies, that only the payload of the ITM or STP messages is stored into the file.

See also

■ [CAalyzer.<specific\\_cmds>](#)

## CAnalyzer.ACCESS Define access path to program code for trace decoding

---

See command [`<trace>.ACCESS`](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 131).

## CAnalyzer.Arm Arm the trace

---

See command [`<trace>.Arm`](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 134).

## CAnalyzer.AutoArm Arm automatically

---

See command [`<trace>.AutoArm`](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 135).

## CAnalyzer.AutoFocus Calibrate AUTOFOCUS preprocessor

---

See command [`<trace>.AutoFocus`](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 135).

## CAnalyzer.AutoInit Automatic initialization

---

See command [`<trace>.AutoInit`](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 140).

## CAnalyzer.BookMark Set a bookmark in trace listing

---

See command [`<trace>.BookMark`](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 140).

See command [`<trace>.BookMarkToggle`](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 143).

See command [`<trace>.Chart`](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 144).

See command [`<trace>.CLOCK`](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 191).

See command [`<trace>.ComPare`](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 192).

See command [`<trace>.ComPareCODE`](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 194).

See command [`<trace>.CustomTrace`](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 195).

See command [`<trace>.CustomTraceLoad`](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 196).

See command [\*\*<trace>.DISable\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 197).

See command [\*\*<trace>.DRAW\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 201).

See command [\*\*<trace>.EXPORT\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 212).

See command [\*\*<trace>.ExtractCODE\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 232).

See command [\*\*<trace>.FILE\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 233).

See command [\*\*<trace>.Find\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 235).

See command [\*\*<trace>.FindAll\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 237).

See command [\*\*<trace>.FindChange\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 238).

See command [\*\*<trace>.FindProgram\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 239).

---

**CAalyzer.FindReProgram**      Activate advanced existing trace search program

---

See command [\*\*<trace>.FindReProgram\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 240).

---

**CAalyzer.FindViewProgram**      State of advanced trace search programming

---

See command [\*\*<trace>.FindViewProgram\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 240).

---

**CAalyzer.FLOWPROCESS**      Process flowtrace

---

See command [\*\*<trace>.FLOWPROCESS\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 241).

---

**CAalyzer.FLOWSTART**      Restart flowtrace processing

---

See command [\*\*<trace>.FLOWSTART\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 241).

---

**CAalyzer.Get**      Display input level

---

See command [\*\*<trace>.Get\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 242).

---

**CAalyzer.GOTO**      Move cursor to specified trace record

---

See command [\*\*<trace>.GOTO\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 244).

See command [`<trace>.Init`](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 246).

**CAAnalyzer.JOINFILE**Concatenate several trace recordings

---

See command [`<trace>.JOINFILE`](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 246).

**CAAnalyzer.List**List trace contents

---

See command [`<trace>.List`](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 248).

**CAAnalyzer.ListNesting**Analyze function nesting

---

See command [`<trace>.ListNesting`](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 263).

**CAAnalyzer.ListVar**List variable recorded to trace

---

See command [`<trace>.ListVar`](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 266).

**CAAnalyzer.LOAD**Load trace file for offline processing

---

See command [`<trace>.LOAD`](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 270).

**CAAnalyzer.MERGEFILE**Combine two trace files into one

---

See command [`<trace>.MERGEFILE`](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 272).

**CAAnalyzer.Mode**Set the trace operation mode

---

See command [`<trace>.Mode`](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 276).

See command [<trace>.OFF](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 278).

---

CAalyzer.PortFilter

Specify utilization of trace memory

---

See command [<trace>.PortFilter](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 279).

---

CAalyzer.PortType

Specify trace interface

---

See command [<trace>.PortType](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 280).

---

CAalyzer.PROfileChart

Profile charts

---

See command [<trace>.PROfileChart](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 283).

---

CAalyzer.PROfileSTATistic

Statistical analysis in a table versus time

---

See command [<trace>.PROfileSTATistic](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 322).

---

CAalyzer.PROTOcol

Protocol analysis

---

See command [<trace>.PROTOcol](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 339).

---

CAalyzer.PROTOcol.Chart

Graphic display for user-defined protocol

---

See command [<trace>.PROTOcol.Chart](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 339).



See command [<trace>.PROTOcol.Draw](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 341).

See command [<trace>.PROTOcol.EXPORT](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 342).

See command [<trace>.PROTOcol.Find](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 343).

See command [<trace>.PROTOcol.List](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 344).

See command [<trace>.PROTOcol.PROfileChart](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 347).

See command [<trace>.PROTOcol.PROfileSTATistic](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 348).

See command [<trace>.PROTOcol.STATistic](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 350).

See command [<trace>.REF](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 357).

See command [<trace>.RESet](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 357).

See command [<trace>.SAVE](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 358).

See command [<trace>.SelfArm](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 362).

See command [<trace>.SIZE](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 373).

See command [<trace>.SnapShot](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 373).

See command [<trace>.SPY](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 374).

See command [<trace>.state](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 376).

See command [<trace>.STATistic](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 378).

---

**CAalyzer.STREAMCompression**

Select compression mode for streaming

See command [<trace>.STREAMCompression](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 483).

---

**CAalyzer.STREAMFILE**

Specify temporary streaming file path

See command [<trace>.STREAMFILE](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 484).

---

**CAalyzer.STREAMFileLimit**

Set size limit for streaming file

See command [<trace>.STREAMFileLimit](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 485).

---

**CAalyzer.STREAMLOAD**

Load streaming file from disk

See command [<trace>.STREAMLOAD](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 486).

---

**CAalyzer.STREAMSAVE**

Save streaming file to disk

See command [<trace>.STREAMSAVE](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 488).

---

**CAalyzer.TDelay**

Trigger delay

See command [<trace>.TDelay](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 489).

See command [\*\*<trace>.TestFocus\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 492).

See command [\*\*<trace>.TestFocusClockEye\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 494).

See command [\*\*<trace>.TestFocusEye\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 495).

See command [\*\*<trace>.TestUtilization\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 495).

See command [\*\*<trace>.THreshold\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 496).

See command [\*\*<trace>.Timing\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 497).

See command [\*\*<trace>.TraceCONNECT\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 499).

See command [\*\*<trace>.TRACK\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 500).

See command [\*\*<trace>.TSElect\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 501).

See command [\*\*<trace>.View\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 502).

See command [\*\*<trace>.ZERO\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 503).

**CIProbe** is the command group that is used to configure, display, and evaluate signal trace information recorded with one of the following setups:

- **Analog Probe connected to port B of a CombiProbe or μTrace (MicroTrace)**

Using the converter LA-4508, a PowerIntegrator Analog probe can be used to capture analog trace data, which can be correlated with flow trace, e. g. for Energy Trace Analysis (ETA).

- **Mixed-Signal Probe connected to port B of a CombiProbe 2 or μTrace (MicroTrace)**

A Mixed-Signal probe can be connected directly to port B of a CombiProbe 2 or μTrace (MicroTrace). Like the analog probe, it can be used for ETA, but it is also possible to capture digital signals for protocol analysis or for measuring interrupt latency for external events.

- **Built-in logic analyzer for debug signals**

With a PowerDebug PRO/E40/X50 and a regular Debug Cable, it is possible to trace the signals that form the debug port (e. g. JTAG). This can be useful when analyzing problems with the debug connection.

For the IDC20A and AUTO26 Debug Cables, a script to set up signal names and JTAG protocol analysis can be found at `~/demo/etc/diagnosis/debug_cable_probe_setup.cmm`.



The Analog Probe must be connected to the port B of the CombiProbe/μTrace (MicroTrace) using a special adapter (LA-4508). Please do not connect the Analog Probe directly to the CombiProbe/μTrace (MicroTrace).

The **CIProbe** feature set and usage is very similar to the **IProbe**, which refers to the analog or logic analyzer port of a PowerTrace module. Notable differences include:

- The **CIProbe** only supports the TRACE32 Analog Probe and Mixed-Signal Probe.
- The **CIProbe** uses the main trace memory of the CombiProbe/μTrace (MicroTrace). The maximum depth is 16/32/64 million records when used with a CombiProbe/μTrace (MicroTrace)/CombiProbe 2, respectively. The built-in logic analyzer for debug signals can store 16 million records.
- The **CIProbe** supports TRACE32 streaming to the host to provide virtually unlimited recording time, limited only by hard drive or SSD capacity of the host PC. Simultaneous **CIProbe** and **CAnalyzer** streaming is also supported.

Due to the similarities, there is no dedicated **CIProbe** user's guide. For general instructions on how to use the **CIProbe** or to learn about its analog capabilities, please refer to [“IProbe User's Guide”](#) (iprobe\_user.pdf). When commands starting with **IProbe** are mentioned, remember to use their **CIProbe** equivalents instead.

The chapter [“CIProbe-specific Trace Commands”](#), page 56 describes the CIProbe-specific configuration commands. While the chapter [“Generic CIProbe Trace Commands”](#), page 64 lists the CIProbe trace analysis and display commands, which are shared with other TRACE32 trace methods.

CIProbe.<specific\_cmds>

Overview of CIProbe-specific commands

See also

- [CIProbe.ALOWerLIMit](#)[CIProbe.ATrigEN](#)[CIProbe.ATrigMODE](#)[CIProbe.AUPPerLIMit](#)
- [CIProbe.Mode](#)[CIProbe.state](#)[CIProbe.TDelay](#)[CIProbe.TOut](#)
- [CIProbe.TSElect](#)

CIProbe.ALOWerLIMit

Set lower trigger/filter comparator value

Format:

CIProbe.ALOWerLIMit <channel> <value>

<channel>:

V0 | V1 | V2 | V3 |  
I0 | I1 | I2

Sets the lower limit for the trigger and filter logic of a physical ADC channel. The <value> must be given in Volts for voltage channels or Amperes for current channels.

The actual comparison performed depends on the [CIProbe.ATrigMODE](#) setting.

See also

- [CIProbe.<specific\\_cmds>](#)

CIProbe.ATrigEN

Enable/disable trigger contribution of a channel

Format:

CIProbe.ATrigEN <channel> [ON | OFF]

<channel>:

V0 | V1 | V2 | V3 |  
I0 | I1 | I2

Enables or disables the contribution of a physical channel's comparator logic to the CIProbe trigger. If this setting is enabled for multiple channels, a trigger condition is generated when the trigger condition of any channels is satisfied.



If no **[ON | OFF]** argument is given, the current state of the setting is toggled.

**NOTE:**

Even if this setting is **OFF** for a given channel, the comparator may still be used for filtering. Refer to the **POD.ADC** command for details.

**See also**

---

■ [CIProbe.<specific\\_cmds>](#)

Format:	CIPProbe.ATrigMODE <channel> <mode>
<channel>:	V0   V1   V2   V3   I0   I1   I2
<mode>:	DISabled   GreaterUPPer   SmallerUPPer   GreaterLOWer   SmallerLOWer   INBound   BEYONDbound

Sets the condition for a physical channel's comparator logic.

DISabled	No value matches.
GreaterUPPer	Value must be greater than upper limit. See <a href="#">CIPProbe.AUPPerLIMit</a> .
SmallerUPPer	Value must be less than upper limit. See <a href="#">CIPProbe.AUPPerLIMit</a> .
GreaterLOWer	Value must be greater than lower limit. See <a href="#">CIPProbe.ALLOWerLIMit</a> .
SmallerLOWer	Value must be less than lower limit. See <a href="#">CIPProbe.ALLOWerLIMit</a> .
INBound	Value must be greater than lower limit and less than upper limit. See <a href="#">CIPProbe.ALLOWerLIMit</a> and <a href="#">CIPProbe.AUPPerLIMit</a> .
BEYONDbound	Value must be less than lower limit or greater than upper limit. See <a href="#">CIPProbe.ALLOWerLIMit</a> and <a href="#">CIPProbe.AUPPerLIMit</a> .

See also

- [CIPProbe.<specific\\_cmds>](#)

Format:	CIProbe.AUPPerLIMit <channel> <value>
<channel>:	V0   V1   V2   V3   I0   I1   I2

Sets the upper limit for the trigger and filter logic of a physical ADC channel. The <value> is in Volts for voltage channels and Amperes for current channels.

The actual comparison performed depends on the [CIProbe.ATrigMODE](#) setting.

See also

---

■ [CIProbe.<specific\\_cmds>](#)

CIProbe.Mode

Set trace operation mode

Format:	CIProbe.Mode Fifo   Stack
---------	---------------------------

- Fifo

If the trace is full, new records will overwrite older records. The trace records always the last cycles before the break.
- Stack

If the trace is full recording will be stopped. The trace always records the first cycles after starting the trace.

See also


---

■ [CIProbe.<specific\\_cmds>](#)    ■ [<trace>.Mode](#)

Format: CIProbe.state

Displays the main CIProbe configuration window. Use the **advanced** button to get access to analog trigger settings.

Use the **Analog Settings** button or the command **POD.state CIP** to enable and configure channels. Note that by default, all channels are disabled, so no data will be recorded.

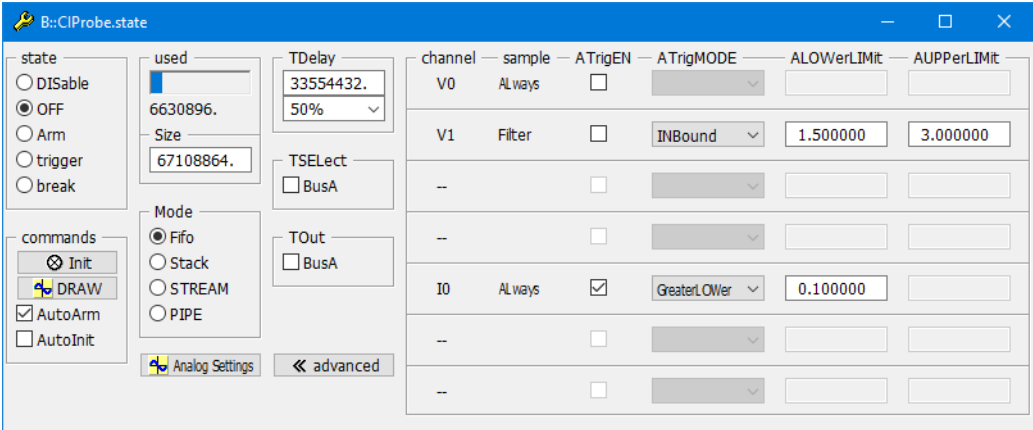

See also

■ CIProbe.<specific\_cmds>

CIProbe.TDelay

Define trigger delay

Format: CIProbe.TDelay <records> | <percent>%

Selects the delay between the trigger point and the time where the trace stops recording. This delay is always defined as a number of records. For convenience, you can also specify a the delay as a percentage of the current **CIProbe.SIZE** setting.

When the trigger point occurs (either from the trigger comparator or from the **BusA** source), the CIProbe will enter the **trigger** state and keep recording. After the number of records specified in this setting, the CIProbe will then enter the **break** state and no longer record new samples.

## Examples:

```
; Stop immediately after the trigger condition. All recorded samples  
; will have been sampled before or at the trigger point.  
CIProbe.TDelay 0.
```

```
; After the trigger condition occurs, fill the entire trace buffer with  
; new samples. All recorded samples will have been sampled after the  
; trigger point.  
CIProbe.TDelay 100%
```

```
; Stop such that the sample point is exactly in the middle of the  
; recorded data.  
CIProbe.TDelay 50%
```

## See also

■ [CIProbe.<specific\\_cmds>](#)

## CIProbe.TOut

## Route CIProbe trigger to PODBUS

Format:            **CIProbe.TOut BusA [ON | OFF]**

When this setting is enabled, the CIProbe will send out a trigger on the PODBUS as soon as a trigger event is detected in the trace data.

Regardless of this setting, a trigger condition will cause the CIProbe to enter the **trigger** and eventually the **break** state.

If no **[ON | OFF]** argument is given, the current state of the setting is toggled.

For information about PODBUS devices, see "[Interaction between independent PODBUS devices](#)".

## See also

■ [CIProbe.<specific\\_cmds>](#)

Format:	<b>CIProbe.TSElect BusA [ON   OFF]</b>
---------	--

When this setting is enabled, a trigger condition on the PODBUS will trigger the CIProbe, This will cause the CIProbe to enter the **trigger** and eventually the **break** state.

If other trigger conditions are configured with **CIProbe.ATrigEN**, these conditions can independently trigger the CIProbe.

If no **[ON | OFF]** argument is given, the current state of the setting is toggled.

For information about PODBUS devices, see "**Interaction between independent PODBUS devices**".

See also

---

■ [CIProbe.<specific\\_cmds>](#)

CIProbe.TSYNC.SELECT

Select trigger input pin and edge or state

Format:	<b>CIProbe.TSYNC.SELECT</b> [ <i>&lt;channel&gt;</i> <i>&lt;mode&gt;</i> ]
<i>&lt;mode&gt;</i> :	<b>Low   High   Falling   Rising</b> <i>&lt;value&gt;</i> <i>&lt;mask&gt;</i>

Set the trigger condition for digital trace. Only available for the Mixed-Signal Probe.

The *<channel>* can be one of the digital CIProbe channels (e. g. CIProbe.00 or an alias set with the command **NAME.Set**) or a Word or Group channel (created with **NAME.Word** or **NAME.Group**). The *<mode>* can be either a level (**Low**, **High**), an edge (**Falling**, **Rising**) or a numeric value or mask, which will assign Low, High or don't care to each of the bits in *<channel>*.

It is possible to specify multiple pairs of [*<channel>* *<mode>*] with this command. The trigger condition will be the logical AND of the given conditions. If no condition is given at all, no digital trigger will be generated.

While it is possible to specify edge triggers for multiple channels, these edges would have to occur within the same digital sample period. Since the CIProbe's sample clock is asynchronous to the target, this makes it impossible to guarantee that two edges will be sampled at the same time. Therefore, a sensible trigger condition will have at most one edge channel in addition to any number of level channels.

**Example:**

```
; set up a named word and two named signals
NAME.Word data CIProbe.00 CIProbe.01 CIProbe.02 CIProbe.03
NAME.Set CIProbe.04 clk
NAME.Set CIProbe.05 valid

; set up a trigger condition:
; - CLK (channel 04) must have a rising edge
; - VALID (channel 05) must be a logic 1
; - DATA (channels 00 to 03) must have the value 0x8 or 0xA
CIProbe.TSYNC.SELect CIProbe.clk Rising \
                    CIProbe.valid High \
                    CIProbe.data 0b10x0
```

# Generic CIProbe Trace Commands

---

## CIProbe.Arm

Arm the trace

See command [`<trace>.Arm`](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 134).

## CIProbe.AutoArm

Arm automatically

See command [`<trace>.AutoArm`](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 135).

## CIProbe.AutoInit

Automatic initialization

See command [`<trace>.AutoInit`](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 140).

## CIProbe.BookMark

Set a bookmark in trace listing

See command [`<trace>.BookMark`](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 140).

## CIProbe.BookMarkToggle

Toggles a single trace bookmark

See command [`<trace>.BookMarkToggle`](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 143).

## CIProbe.Chart

Display trace contents graphically

See command [`<trace>.Chart`](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 144).



See command **<trace>.ComPare** in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 192).

---

**CIProbe.DISable****Disable the trace**

---

See command **<trace>.DISable** in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 197).

---

**CIProbe.DisConfig****Trace disassembler configuration**

---

See command **<trace>.DisConfig** in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 198).

---

**CIProbe.DRAW****Plot trace data against time**

---

See command **<trace>.DRAW** in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 201).

---

**CIProbe.EXPORT****Export trace data for processing in other applications**

---

See command **<trace>.EXPORT** in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 212).

---

**CIProbe.FILE****Load a file into the file trace buffer**

---

See command **<trace>.FILE** in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 233).

---

**CIProbe.Find****Find specified entry in trace**

---

See command **<trace>.Find** in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 235).

---

**CIProbe.FindAll****Find all specified entries in trace**

---

See command **<trace>.FindAll** in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 237).

See command [<trace>.FindChange](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 238).

---

**CIProbe.Get**

Display input level

See command [<trace>.Get](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 242).

---

**CIProbe.GOTO**

Move cursor to specified trace record

See command [<trace>.GOTO](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 244).

---

**CIProbe.Init**

Initialize trace

See command [<trace>.Init](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 246).

---

**CIProbe.List**

List trace contents

See command [<trace>.List](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 248).

---

**CIProbe.ListNesting**

Analyze function nesting

See command [<trace>.ListNesting](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 263).

---

**CIProbe.ListVar**

List variable recorded to trace

See command [<trace>.ListVar](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 266).

---

**CIProbe.LOAD**

Load trace file for offline processing

See command [<trace>.LOAD](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 270).

See command [<trace>.OFF](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 278).

---

## CIProbe.PROfile

Rolling live plots of trace data

See command [<trace>.PROfile](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 282).

---

## CIProbe.PROfile.channel

Display profile of signal probe channels

See command [<trace>.PROfile.channel](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 282).

---

## CIProbe.PROfileChart

Profile charts

See command [<trace>.PROfileChart](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 283).

---

## CIProbe.PROTOcol

Protocol analysis

See command [<trace>.PROTOcol](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 339).

---

## CIProbe.PROTOcol.Chart

Graphic display for user-defined protocol

See command [<trace>.PROTOcol.Chart](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 339).

---

## CIProbe.PROTOcol.Draw

Graphic display for user-defined protocol

See command [<trace>.PROTOcol.Draw](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 341).

See command [<trace>.PROTOcol.EXPORT](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 342).

See command [<trace>.PROTOcol.Find](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 343).

See command [<trace>.PROTOcol.List](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 344).

See command [<trace>.PROTOcol.PROfileChart](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 347).

See command [<trace>.PROTOcol.PROfileSTATistic](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 348).

See command [<trace>.PROTOcol.STATistic](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 350).

See command [<trace>.REF](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 357).

See command [\*\*<trace>.RESet\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 357).

See command [\*\*<trace>.SAVE\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 358).

See command [\*\*<trace>.SIZE\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 373).

See command [\*\*<trace>.SPY\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 374).

See command [\*\*<trace>.STATistic\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 378).

See command [\*\*<trace>.STREAMCompression\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 483).

See command [\*\*<trace>.STREAMFILE\*\*](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 484).

See command [<trace>.STREAMFileLimit](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 485).

See command [<trace>.Timing](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 497).

See command [<trace>.TRACK](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 500).

See command [<trace>.View](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 502).

See command [<trace>.ZERO](#) in 'General Commands Reference Guide T' (general\_ref\_t.pdf, page 503).

ClipSTOre

Store settings to clipboard

Format:	ClipSTOre [%<format>] [<item> ...]
<format>:	sYmbol   NosYmbol
<item>:	default   ALL   Win   WinPAGE   Symbolic   HEX   SYStem ...

Stores settings in the format of PRACTICE commands to the clipboard.

<item>, <format>      For a detailed descriptions, refer to the [STOre](#) command.

Example:

```
ClipSTOre SYStem           ; store the settings of the SYStem.state window
                           ; to the clipboard
```

Result (example):

```
B::

SYStem.RESet
SYStem.CPU CortexA9
SYStem.CONFIG CORE 1.
SYStem.MemAccess Enable
SYStem.CpuBreak Enable
SYStem.CpuSpot Enable
SYStem.Option.IMASKASM  ON
SYStem.Mode Up

ENDDO
```

See also

- [AutoSTOre](#)
- [STOre](#)
- [SETUP.STOre](#)

CLOCK

Display date and time

The command group **CLOCK** is used to display and calculate the system clock configuration. The results are also used to decode the on-chip trace timestamp information in complex scenarios.

Currently this feature is only implemented for TriCore, PCP, and GTM.

For architectures that do not have the **CLOCK** command group, **CLOCK** is an alias for [DATE](#).

See also

- [■ CLOCK.BACKUP](#)  
[■ CLOCK.OSCillator](#)  
[■ CLOCK.SYSCLock](#)
- [■ CLOCK.DATE](#)  
[■ CLOCK.Register](#)  
[■ CLOCK.VCOBase](#)
- [■ CLOCK.OFF](#)  
[■ CLOCK.RESet](#)  
[■ CLOCK.VCOBaseERAY](#)
- [■ CLOCK.ON](#)  
[■ CLOCK.state](#)  
[■ DATE](#)
- [▲ 'Release Information' in 'Legacy Release History'](#)

CLOCK.BACKUP

Set backup clock frequency

TriCore only, device dependent

Format:           **CLOCK.BACKUP** *<frequency>*

Default: 100.0MHz (TriCore, device dependent)

Configure the backup clock frequency. Required to compute the clock frequencies when TriCore switches to the backup clock. Check CPU data sheet for details.

See also

- [■ CLOCK](#)
- [■ CLOCK.state](#)



Format:	CLOCK.DATE
---------	------------

Alias for the [DATE](#) command.

See also

---

[CLOCK](#)[CLOCK.state](#)

CLOCK.OFF

Disable clock frequency computation

Format:	CLOCK.OFF
---------	-----------

Default: OFF

Disables the computation of clock frequencies.

See also

---

[CLOCK](#)[CLOCK.state](#)

CLOCK.ON

Enable clock frequency computation

Format:	CLOCK.ON
---------	----------

Enables the computation of clock frequencies.

Prior to enabling the computation of clock frequencies, it is recommended to configure the clock sources (oscillator, backup, VCOBase). The resulting clock frequencies are also used for decoding on-chip trace timestamps, if supported by device and TRACE32.

See also

---

[CLOCK](#)[CLOCK.state](#)

Format:

CLOCK.OSCillator <frequency>

Default: 20.0MHz (TriCore)

Configures the board oscillator clock frequency. Check board oscillator and/or schematics.

See also

CLOCK

CLOCK.state

Format:

CLOCK.Register

Opens the PLL or system clock register section within the device's peripheral file.

See also

CLOCK

CLOCK.state

Format:

CLOCK.RESet

Resets all CLOCK command group related settings to defaults.


See also

CLOCK

CLOCK.state

Format: **CLOCK.state**

Opens a dialog with all computed clock frequencies and related settings.

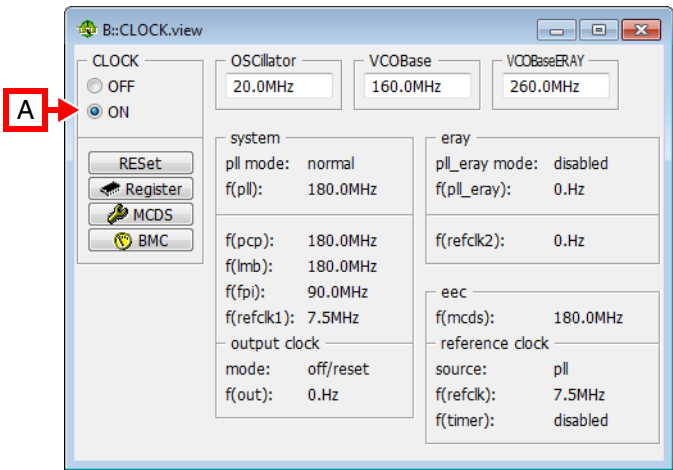

**A** For descriptions of the commands in the **CLOCK.state** window, please refer to the **CLOCK.\*** commands in this chapter.  
**Example:** For information about **ON**, see **CLOCK.ON**.

See also

- CLOCK
  - CLOCK.ON
  - CLOCK.SYSClock
- CLOCK.BACKUP
  - CLOCK.OSCillator
  - CLOCK.VCOBase
- CLOCK.DATE
  - CLOCK.Register
  - CLOCK.VCOBaseERAY
- CLOCK.OFF
  - CLOCK.RESet

CLOCK.SYSClock

Set external clock frequency

TriCore only, device dependent

Format: **CLOCK.SYSClock** <frequency>

Configure the external clock frequency when the SYSCLOCK pin is used as clock source. Check CPU data sheet for details.

See also

- CLOCK
- CLOCK.state

TriCore only, device dependent

Format:

CLOCK.VCOBase <frequency>

Default: device dependent

Configures the VCO base clock frequency. Required when TriCore PLL operates in free-running mode. Check CPU data sheet for details.

See also

- CLOCK
- CLOCK.state

TriCore only, device dependent

Format:

CLOCK.VCOBaseERAY <frequency>

Default: device dependent

Configures the FlexRay VCO base clock frequency. Required when TriCore FlexRay PLL operates in free-running mode. Check CPU data sheet for details.

See also

- CLOCK
- CLOCK.state

For a description of the **CMI** commands and **CMITrace** commands, see **“System Trace User’s Guide”** (trace\_stm.pdf).

The Coherent Mesh Network (CMN) is a scalable and configurable coherent interconnect which enables the developer to output the messages of the coherence protocol without affecting the run-time behavior of the system.

For a description of the **CMN** commands, see [“System Trace User’s Guide”](#) (trace\_stm.pdf).

### Overview CMN<trace>

Using the **CMN<trace>** command group, you can configure the trace recording as well as analyze and display the recorded CMN trace data. The command groups consist of the name of the trace source, here **CMN**, plus the TRACE32 trace method you have chosen for recording the CMN trace data.

For more information about the TRACE32 convention of combining *<trace\_source>* and *<trace\_method>* to a *<trace>* command group that is aimed at a specific trace source, see [“Replacing <trace> with Trace Source and Trace Method - Examples”](#) (general\_ref\_t.pdf).

Not any arbitrary combination of *<trace\_source>* and *<trace\_method>* is possible. For an overview of the available command groups [“Related Trace Command Groups”](#) (general\_ref\_t.pdf).

#### Example:

```
CMNTrace.state           ;optional step: open the window in which the
                        ;trace recording is configured.
CMNTrace.METHOD Analyzer ;select the trace method Analyzer for
; <configuration>        ;recording trace data.

CMN.state                ;optional step: open the window in which
                        ;the trace source CMN is configured.
CMN.ON                   ;switch the trace source CMN on.
; <configuration>

;trace data is recorded using the commands Go, WAIT, Break

CMNAnalyzer.List         ;display the CMN trace data recorded with the
                        ;trace method Analyzer as a trace listing.

CMNTrace.List            ;this is the generic replacement for the above
                        ;CMNAnalyzer.List command.
```

Format:	<b>CMNAnalyzer.</b> <i>&lt;sub_cmd&gt;</i>
---------	--

The **CMNAnalyzer** command group allows to display and analyze the information emitted by the Coherent Mesh Network (CMN) component.

The CMN information emitted off-chip via the Trace Port Interface Unit (**TPIU**) is recorded by the TRACE32 PowerTrace.

<i>&lt;sub_cmd&gt;</i>	<p>For descriptions of the subcommands, please refer to the general <i>&lt;trace&gt;</i> command descriptions in “<b>General Commands Reference Guide T</b>” (<i>general_ref_t.pdf</i>).</p> <p><b>Example:</b> For a description of <b>CMNAnalyzer.List</b> refer to <i>&lt;trace&gt;.List</i></p>
------------------------	---

CMNCAnalyzer

Analyze CMN information recorded by CombiProbe

Format:	<b>CMNCAnalyzer.</b> <i>&lt;sub_cmd&gt;</i>
---------	---

The **CMNCAnalyzer** command group allows to display and analyze the information emitted by the Coherent Mesh Network (CMN) component.

The CMN information emitted off-chip via the Trace Port Interface Unit (**TPIU**) is recorded by the TRACE32 CombiProbe.

<i>&lt;sub_cmd&gt;</i>	<p>For descriptions of the subcommands, please refer to the general <i>&lt;trace&gt;</i> command descriptions in “<b>General Commands Reference Guide T</b>” (<i>general_ref_t.pdf</i>).</p> <p><b>Example:</b> For a description of <b>CMNCAnalyzer.List</b> refer to <i>&lt;trace&gt;.List</i></p>
------------------------	--



Format:

CMNHAnalyzer.<sub\_cmd>

The **CMNHAnalyzer** command group allows to display and analyze the information emitted by the Coherent Mesh Network (CMN) component. Trace data is transferred off-chip via the USB port and is recorded in the trace memory of the TRACE32 host analyzer.

<sub_cmd>	<p>For descriptions of the subcommands, please refer to the general &lt;trace&gt; command descriptions in <b>“General Commands Reference Guide T”</b> (general_ref_t.pdf).</p> <p><b>Example:</b> For a description of <b>CMNHAnalyzer.List</b> refer to <b>&lt;trace&gt;.List</b></p>
-----------	--

Format:

CMNLA.<sub\_cmd>

The **CMNLAnalyzer** command group allows to display and analyze the information emitted by the Coherent Mesh Network (CMN) component. Trace data is collected form Lauterbach’s Logic Analyzer or from a binary file.

<sub_cmd>	<p>For descriptions of the subcommands, please refer to the general &lt;trace&gt; command descriptions in <b>“General Commands Reference Guide T”</b> (general_ref_t.pdf).</p> <p><b>Example:</b> For a description of <b>CMNLAnalyzer.List</b> refer to <b>&lt;trace&gt;.List</b></p>
-----------	--

Format:

CMNOnchip.<sub\_cmd>

The **CMNOnchip** command group allows to display and analyze the information emitted by the Coherent Mesh Network (CMN) component.

The CMN trace is sent to the device-specific onchip trace memory and is read by TRACE32 via debug cable (JTAG).

<code>&lt;sub_cmd&gt;</code>	<p>For descriptions of the subcommands, please refer to the general <code>&lt;trace&gt;</code> command descriptions in “<a href="#">General Commands Reference Guide T</a>” (<code>general_ref_t.pdf</code>).</p> <p><b>Example:</b> For a description of <b>CMNOnchip.List</b> refer to <a href="#">&lt;trace&gt;.List</a></p>
------------------------------	---

See also

- [■ CORE.ADD](#)  
[■ CORE.ReMove](#)
- [■ CORE.ASSIGN](#)  
[■ CORE.select](#)
- [■ CORE.List](#)  
[■ CORE.SHOWACTIVE](#)
- [■ CORE.NUMber](#)  
[■ CORE.SINGLE](#)
- [▲ 'CORE Functions' in 'General Function Reference'](#)


Overview CORE

With the **CORE** command group, TRACE32 supports debugging of SMP systems (symmetric multiprocessing).

For various architectures like ARM, MIPS, PowerPC, and SH4 there are chips containing two or more identical cores.

When debugging SMP systems with TRACE32, the context (**Register** window, **List** window, etc.) of a **single core** is displayed at a time, but it is possible to switch to another core within the same TRACE32 instance. In contrast to this, all debug actions as **Go** or **Break** are effected on **all cores** to maintain synchronicity between the cores.

To set up an SMP System the commands **SYStem.CONFIG.CoreNumber** and **CORE.ASSIGN** or **CORE.NUMber** are necessary. The **SYStem.CONFIG** window and commands define how the access to a certain hardware thread can be achieved and how many hardware threads are available. The **CORE** commands assign the hardware threads to the SMP system that is handled by this TRACE32 instance. In case there are multiple SMP systems configured on the chip, the command **SYStem.CONFIG.CORE** is necessary to define different SMP System indices (Y) that are used as start value for the command **CORE.NUMber** and the information whether the SMP System is located at a different or the same chip by the chip index (X).

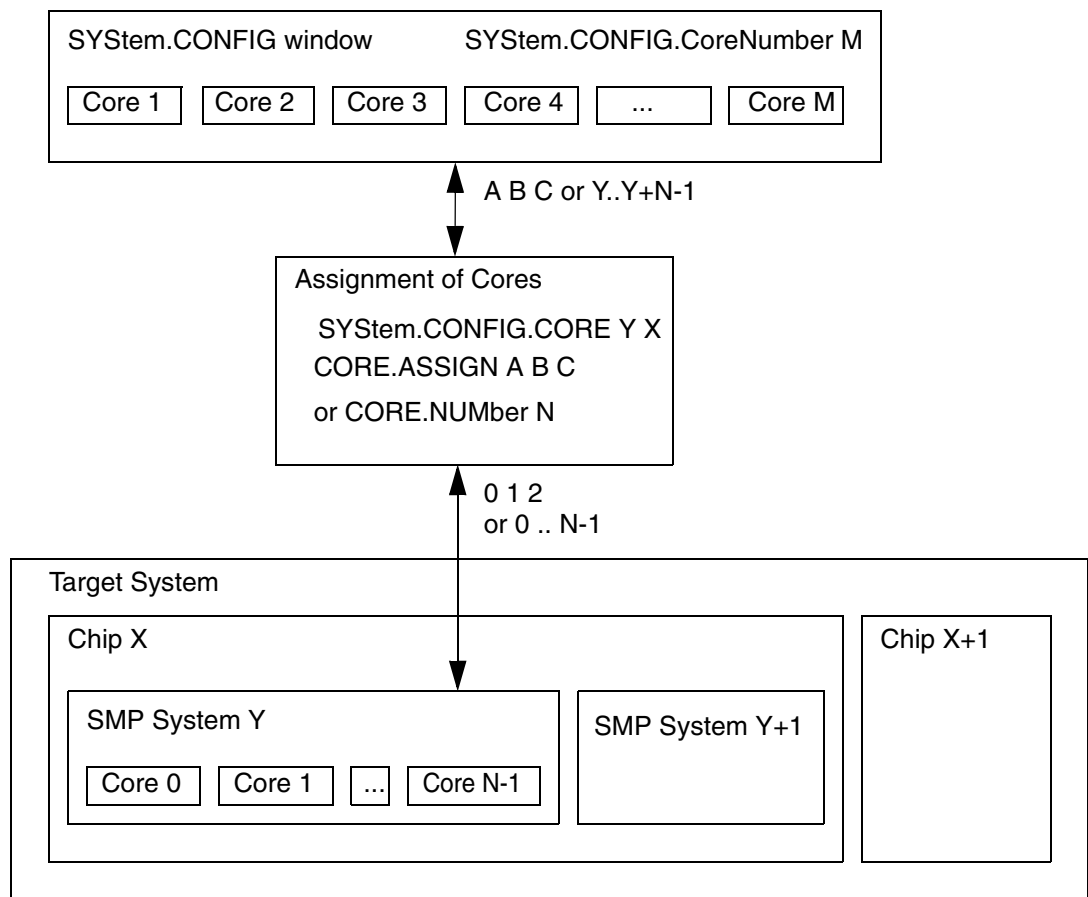

Setup of SMP Systems

## CORE.ADD

Add core/thread to the SMP system

Format: **CORE.ADD** <core> | <thread>  
**THREAD.ADD** (deprecated)

Adds a physical core/thread to the SMP System. This synchronizes it with other cores/threads when debug features are applied to the SMP System.

### See also

■ [CORE](#)

■ [CORE.select](#)

Format 1:	<b>CORE.ASSIGN</b> <core1> [<core2> ...]
Format 2:	<b>CORE.ASSIGN</b> <thread1> [<thread2> ...] MIPS64, XLR, XLS, XLP, QorlQ64 only

The command configures an instance of the TRACE32 PowerView GUI so that this particular instance knows for which physical cores or physical threads of the target system it is “responsible”. Typically this configuration is required in multicore systems:

- In AMP (asynchronous multiprocessing) systems, each TRACE32 PowerView instance is responsible for a single physical core/thread.
- In SMP (symmetric multiprocessing) systems, an instance of TRACE32 PowerView may be responsible for multiple physical cores/threads.
- Mixed AMP SMP systems may have several TRACE32 PowerView instances, where one or more TRACE32 PowerView instances are responsible for more than one physical core/thread.

<core>	The physical <core> number refers to the respective physical core in the chip. This applies to CPUs that have only physical cores (i.e. no physical threads at all, or just one thread).
<thread>	The physical <thread> number refers to the respective physical thread in the chip. This applies to CPUs with physical cores that have more than one thread per core.  The physical threads are numbered sequentially throughout all cores. Thus, the cores themselves can be ignored in the multicore setup of TRACE32.

Each core/thread assignment is also referred to as TRACE32 configuration. A TRACE32 configuration contains information about how to access a specific *physical core/thread* in a multicore chip, e.g.:

- TAP coordinates (IRPRE, IRPOST, DRPRE, DRPOST)
- CoreSight addresses for ARM chips
- Other physical access parameters for the core/thread

The setup of the individual cores/threads is done in the **SYStem.CONFIG** window.

<b>NOTE:</b>	For each assigned physical core/thread, TRACE32 uses a logical core number, which serves as an alias for the physical core/thread.
--------------	--

## Examples

To illustrate the **CORE.ASSIGN** command, the following examples are provided:

- [Example 1 - Assignment of Physical Cores](#)
- [Example 2 - Assignment of Physical Threads \(MIPS specific\)](#)
- [Example 3 - Core Assignment for an SMP-4 / AMP-3 Setup \(MIPS specific\)](#)
- [Example 4 - Core Assignment for an AMP-2 Setup \(MIPS specific\)](#)


### Example 1 - Assignment of Physical Cores

In this example, the *physical* cores 1, 2, 4, and 5 of a multicore chip are assigned to TRACE32; core 3 is not used in this example setup. The resulting *logical* cores can be seen from the **Cores** pull-down list in TRACE32.

```
CORE.ASSIGN 1. 2. 4. 5. ;assign the physical cores 1, 2, 4, and 5
```

Assigned *physical* cores

Resulting *logical* cores

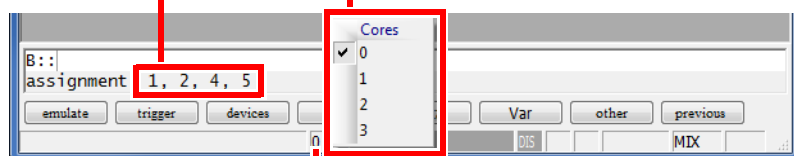


Right-click to open the **Cores** pull-down list.

In the status line, this box shows the currently selected core, here core 0.

Example 2 - Assignment of Physical Threads


In this example, a CPU has 3 physical cores, each core has 2 physical threads. That means for TRACE32, this CPU has 6 physical threads in total. Use **CORE.ASSIGN** as shown below to assign the 6 *physical* threads. The resulting *logical* threads can be seen from the **Cores** pull-down list in TRACE32.

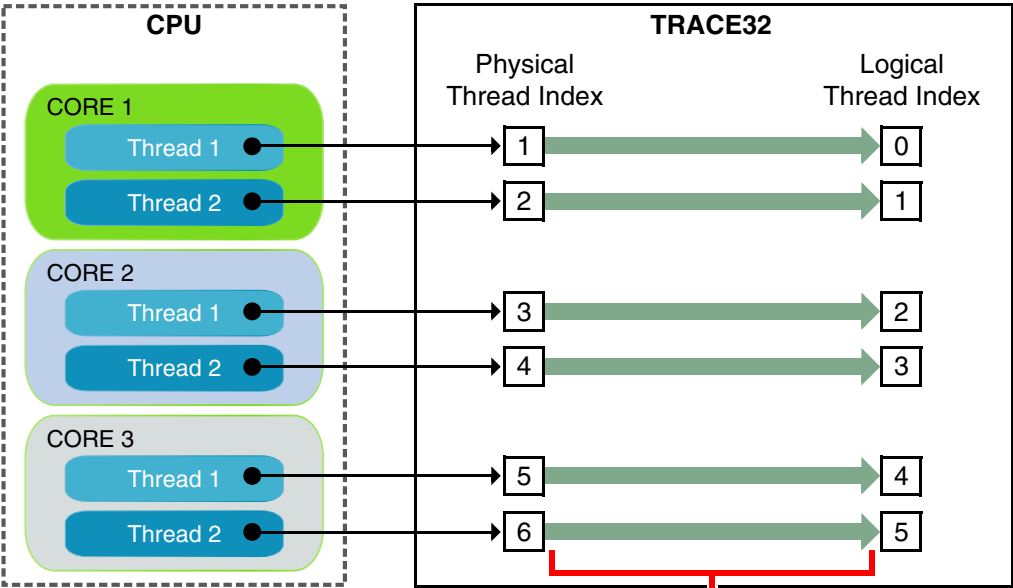

```
CORE.ASSIGN 1. 2. 3. 4. 5. 6. ;assign the physical threads 1 to 6
```

### Example 3: Core Assignment for an SMP-4 / AMP-3 Setup (MIPS specific)

The figure shows an SMP-4 / AMP-3 setup. For this kind of setup, the six cores need to be assigned to three TRACE32 PowerView GUIs. The target is a MIPS64 with six cores (CPU CN6335).

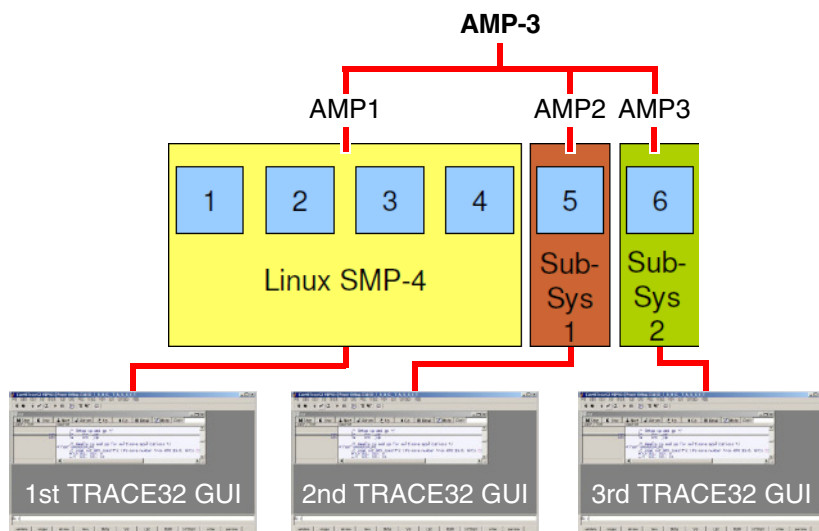

Code required for assigning the cores 1 to 4 to the first TRACE32 PowerView GUI:

```
SYStem.CPU CN63XX ; Select the target CPU (MIPS CN6335).

; Inform TRACE32 about the total number of cores of this multicore chip.
SYStem.CONFIG.CoreNumber 6.

; Start core assignment at this <core> of this <chip>.
SYStem.CONFIG.CORE          1.          1.

; Assign the cores 1 to 4 to the first TRACE32 PowerView GUI.
CORE.ASSIGN 1. 2. 3. 4.
```

Code required for assigning core 5 to the second TRACE32 PowerView GUI:

```
; This step needs to be repeated for the second TRACE32 PowerView GUI:
SYStem.CPU CN63XX ;Select the target CPU (MIPS CN6335).

; This step needs to be repeated for the second TRACE32 PowerView GUI:
; Inform TRACE32 about the total number of cores of this multicore chip.
SYStem.CONFIG.CoreNumber 6.

; Start core assignment at this <core> of this <chip>.
SYStem.CONFIG.CORE          5.          1.

; Assign the core 5 to the second TRACE32 PowerView GUI.
CORE.ASSIGN 5.
```



Code required for assigning core 6 to the third TRACE32 PowerView GUI:

```
; This step needs to be repeated for the third TRACE32 PowerView GUI:
SYStem.CPU CN63XX ;Select the target CPU (MIPS CN6335).


; This step needs to be repeated for the third TRACE32 PowerView GUI:
; Inform TRACE32 about the total number of cores of this multicore chip.
SYStem.CONFIG.CoreNumber 6.

; Start core assignment at this <core> of this <chip>.
SYStem.CONFIG.CORE          6.          1.

; Assign the core 6 to the third TRACE32 PowerView GUI.
CORE.ASSIGN 6.
```

#### Example 4: AMP-2 Setup (MIPS specific)

The figure shows an AMP-2 setup, which in turn consists of an SMP-2 and SMP-4 setup. For this kind of setup, the six cores need to be assigned to two TRACE32 PowerView GUIs. The target is a MIPS64 with six cores (CPU CN6335).

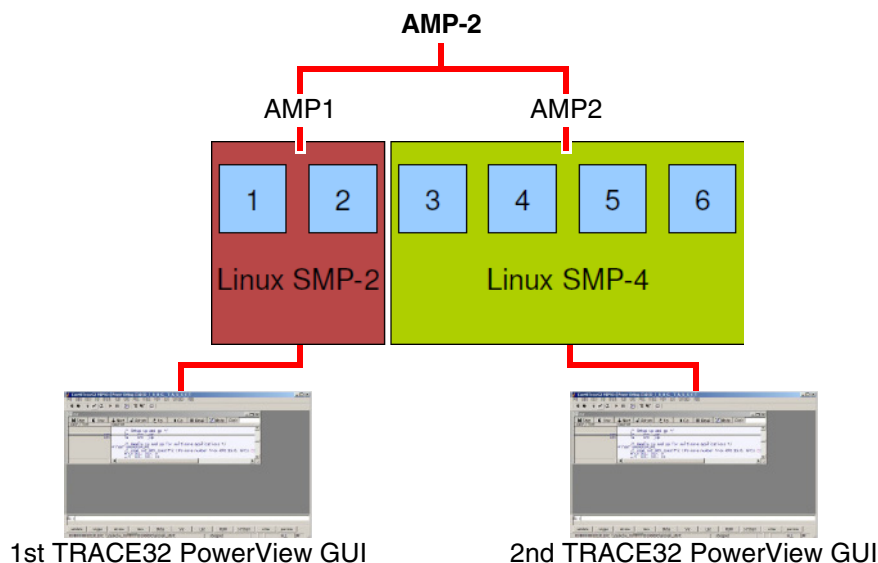

Code required for assigning the cores 1 and 2 to the first TRACE32 PowerView GUI:

```
SYStem.CPU CN63XX ; Select the target CPU (MIPS CN6335).

; Inform TRACE32 about the total number of cores of this multicore chip.
SYStem.CONFIG.CoreNumber 6.

; Start core assignment at this <core> of this <chip>.
SYStem.CONFIG.CORE          1.          1.

; Assign the cores 1 and 2 to the first TRACE32 PowerView GUI.
CORE.ASSIGN 1. 2.
```

## Code required for assigning the cores 3 to 6 to the second TRACE32 PowerView GUI:

```
; This step needs to be repeated for the second TRACE32 PowerView GUI:  
SYStem.CPU CN63XX ; Select the target CPU (MIPS CN6335).  
  
; This step needs to be repeated for the second TRACE32 PowerView GUI:  
; Inform TRACE32 about the total number of cores of this multicore chip.  
SYStem.CONFIG.CoreNumber 6.  
  
; Start core assignment at this <core> of this <chip>.  
SYStem.CONFIG.CORE          3.          1.  
; Assign the cores 3 to 6 to the first TRACE32 PowerView GUI.  
CORE.ASSIGN 3. 4. 5. 6.
```

### NOTE:

The numbering of physical and logical cores is as follows:

- “Physical cores” may have numbers starting with 1.
- “Logical cores” have numbers starting with 0.

### See also

■ [CORE](#)

■ [CORE.select](#)


■ [SYStem.CONFIG.CORE](#)

□ [CORE.ISASSIGNED\(\)](#)

Format:

CORE.List

Lists for each core the location of the PC (program counter) and the current task. The list is empty while the cores are running and updated as soon as the program execution is stopped.

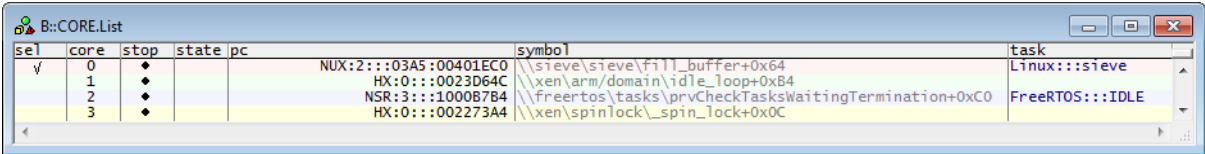

Description of Columns in the CORE.List Window

sel	Currently selected core.
core	Logical core number.
stop	Stopped cores.
state	Architecture-specific states, e.g. power down.
pc	Location of the PC.
symbol	Symbol information about the PC
task	Active task on core.

See also

- CORE

■ CORE.select

■ TASK.List.tasks

□ CORE()
- ▲ 'PowerView - Screen Display' in 'PowerView User's Guide'


Format:

CORE.NUMber <number\_of\_cores> | <number\_of\_threads>

Assigns multiple physical cores/threads to the SMP system. The cores/threads are assigned in a linear sequence and without gaps.

The setup of the cores/threads is done in the **SYStem.CONFIG** window. The assignment starts with the <core> parameter of the **SYStem.CONFIG.CORE** command and iterates through the number of cores/threads passed to the **CORE.NUMber** command.


**Example 1** shows how to assign the first 4 cores of a chip. In our example, chip 1 has 7 cores.

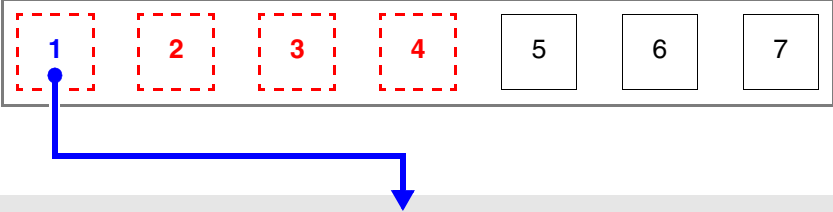

```
;                                <core>    <chip> i.e. start at core 1 of chip 1
SYStem.CONFIG.CORE              1.          1.

CORE.NUMber 4. ;assign the first 4 cores.
                ;this assignment corresponds to: CORE.ASSIGN 1. 2. 3. 4.
```

**Example 2** shows how to assign the cores 3 to 6 of a chip. In our example, chip 1 has 7 cores.

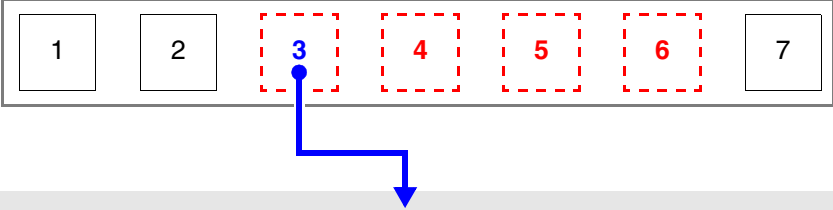

```
;                                <core>    <chip> i.e. start at core 3 of chip 1
SYStem.CONFIG.CORE              3.          1.

CORE.NUMber 4. ;assign cores 3 to 6, i.e. 4 cores.
                ;this assignment corresponds to: CORE.ASSIGN 3. 4. 5. 6.
```

See also

- CORE
- CORE.select

Format:

CORE.ReMove <core>  
THREAD.ReMove (deprecated)

Removes a physical core from the SMP system.

See also

- CORE
- CORE.select

CORE.select

Change currently selected core

Format:

CORE.select <logical\_core>  
THREAD.select (deprecated)

Changes the currently selected core to the specified <logical\_core>. As a result the debugger view is changed to <logical\_core> and all commands without **/CORE** <number> option apply to <logical\_core>.

The number of the selected core is displayed in the state line at the bottom of the TRACE32 main window.

NOTE:

CORE.List shows the states of all cores and allows to switch between cores with a simple mouse-click.

See also

- CORE
- CORE.ADD
- CORE.ASSIGN
- CORE.List
- CORE.NUMber
- CORE.ReMove
- CORE.SHOWACTIVE
- CORE.SINGLE
- MACHINE.select
- TASK.select
- CORE()

Format:


CORE.SHOWACTIVE

Opens a window with a color legend, displaying individual colors and numbers for the cores assigned to TRACE32:

- Gray indicates that a core is inactive.  
An inactive core is not executing any code. The debugger can neither control nor talk to this core. A core is inactive if it is not clocked or not powered or held in reset.
- Colors other than gray (e.g. orange, green, yellow) indicate that a core is active.  
An active core is executing code and the debugger has full control. A core is active if it is clocked, powered and not in reset.

Clicking a number switches the debugger view to the selected core. The window background is highlighted in the same color as the selected core.

For example, when you click **1** in the **CORE.SHOWACTIVE** window, the **Register.view** window updates accordingly. The green background color tells you that this register information refers to core 1 (see screenshots below):

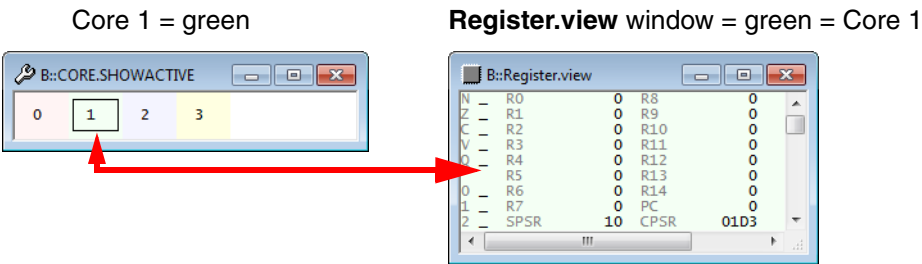

**Example:** Let's assume a multicore chip has 6 cores, and just 4 cores of them are assigned to the TRACE32 PowerView GUI. The **CORE.SHOWACTIVE** window lets you switch between the assigned 4 cores. If you want to pin a window to a particular core, append **/CORE <number>** to the window command (see source example below):

```
;- The cores 1, 2, 4, 5 (= four cores) are assigned to the TRACE32
; PowerView GUI
;- The cores 3 and 6 are skipped (= two cores)
CORE.ASSIGN 1. 2. 4. 5.
SYStem.Up

;Open the CORE.SHOWACTIVE window. It has four entries because
;four cores were assigned to the TRACE32 PowerView GUI via CORE.ASSIGN
CORE.SHOWACTIVE ;To select a core, click the core number you want

;alternatively, use this command to select the core you want:
CORE.select 1 ;e.g. select core 1

Register.view ;displays register information and source listing
Data.List func1 ;from the core currently selected in the
;CORE.SHOWACTIVE window, i.e. core 1

Register.view /CORE 3. ;displays register information from core 3
Data.List func1 /CORE 3. ;and source listing from core 3,
;independently of the core currently selected
;in the CORE.SHOWACTIVE window
```

See also

- [■ CORE](#)  
[■ SETUPCOLOR](#)
- [■ CORE.select](#)  
[□ CORE.ISACTIVE\(\)](#)
- [■ CmdPOS](#)
- [■ FramePOS](#)
- [▲ 'PowerView - Screen Display' in 'PowerView User's Guide'](#)


CORE.SINGLE

Select single core for debugging

[build 137288 - DVD 09/2021]

Format: CORE.SINGLE <logical\_core>

Selects single core for debugging on SMP systems. As a result the debugger view is changed to <logical\_core> and all commands, as **Go** and **Step**, are only valid for this core. The core number field in the TRACE32 state line will display the number of the selected core with a turquoise background color.

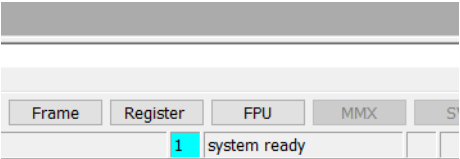

The command **CORE.select** can be used to revert this selection when the CPU is stopped.

#### See also

---

■ [CORE](#)

■ [CORE.select](#)



See also

- |                                  |                               |                                     |                               |
|----------------------------------|-------------------------------|-------------------------------------|-------------------------------|
| ■ <a href="#">Count.AutoInit</a> | ■ <a href="#">Count.Gate</a>  | ■ <a href="#">Count.GO</a>          | ■ <a href="#">Count.Init</a>  |
| ■ <a href="#">Count.Mode</a>     | ■ <a href="#">Count.OUT</a>   | ■ <a href="#">Count.PROfile</a>     | ■ <a href="#">Count.RESet</a> |
| ■ <a href="#">Count.Select</a>   | ■ <a href="#">Count.state</a> | □ <a href="#">Count.Frequency()</a> |                               |
- ▲ ['Count' in 'EPROM/FLASH Simulator'](#)
  - ▲ ['Count Functions' in 'General Function Reference'](#)
  - ▲ ['Release Information' in 'Legacy Release History'](#)

## Overview Count

---

### Counter of TRACE32-ICD

---


The universal counter system TRACE32-ICD can measure the frequency of the target clock (if the target clock is connected to the debug cable) or the signal on the count line of the **Stimuli Generator** (see [“Stimuli Generator User’s Guide”](#) (stg\_user.pdf)).

The input multiplexer enables the target clock line if a debug module is used and [Count.Select](#) is entered while the device **B:** (TRACE32-ICD) is selected.

The input multiplexer enables the count line of the Stimuli Generator if a Stimuli Generator is connected and [Count.Select](#) is entered while the device **ESI:** (EPROM Simulator) is selected.

If only the debug module or only the Stimuli Generator is connected, the input multiplexer enables the present input signal independent of the device selection.

Using the [Count.OUT](#) command the input signal is issued to the trigger connector on the PODBUS interface. By that the trigger output is disabled.

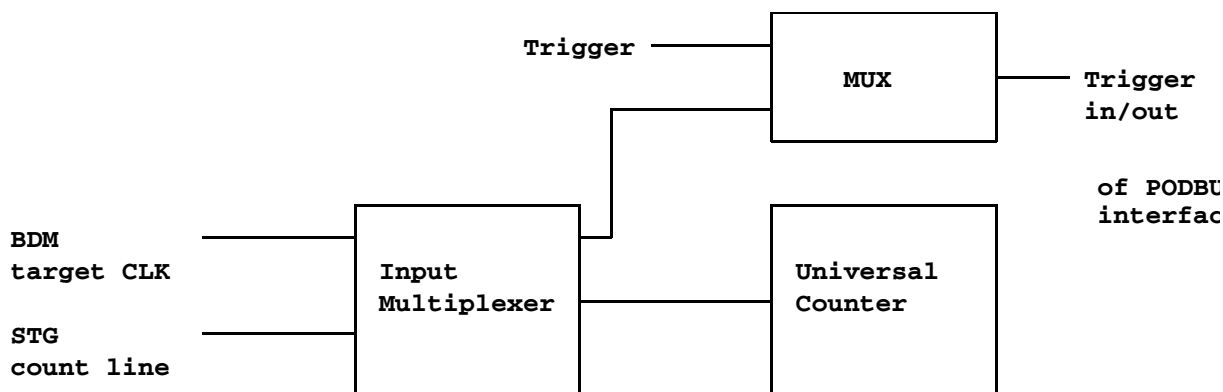

## Counter Functions

---

To use the result of the measurement in automatic test programs, some functions are defined to get the counter state. The functions are valid only if the **Count.Go** command is executed.

### **Count.Frequency()**

The result of a frequency measurement

### **Count.LEVEL()**

The actual level of the counter signal (Low = 0, High = 1)

### **Count.Time()**

The result of a period or pulse duration measurement

### **Count.VALUE()**

The result of a event count measurement

Format:	<b>Count.AutoInit</b> [ON   OFF]
---------	----------------------------------

If AutoInit is selected, the counter is initialized when emulation is started ([Go](#) or [Step](#)).

See also

- [■ Count](#)
- [■ Count.state](#)
- [▲ 'Count' in 'EPROM/FLASH Simulator'](#)

Count.Gate

Gate time

Format:	<b>Count.Gate</b> [ <i>&lt;time&gt;</i> ]
<i>&lt;time&gt;</i> :	<b>0.01s ... 10.0s</b> <b>0.</b> (= infinite gate time)

The gate time has two functions. On measuring frequencies it defines the sample time (gate time). The precision of the measurement increases with the gate time. If pulse measurement is selected, the gate time is the max. time for the pulse width. To measure very long pulses the gate time must be set to infinite.

Count.Gate 0.1s	; set gate time to 0.1 s
Count.Gate 0.	; infinite gate time

See also

- [■ Count](#)
- [■ Count.state](#)

Format:

Count.GO

Start single measurement of the frequency counter. This command is usually used only in PRACTICE scripts.

```
Count.Select Cycle
Count.Mode Frequency
Count.Gate 0.1s
Count.GO                ; start measurement
PRINT COUNT.VALUE()    ; print value
```

See also

■ Count

■ Count.state

□ Count.Frequency()

□ Count.Time()

□ Count.VALUE()

▲ 'Count' in 'EPROM/FLASH Simulator'

Format:

Count.Init

The counter is reset (counter value to zero), running measurement cycles are stopped. The counter modes and the channel selection are not changed.

See also

■ Count

■ Count.state

▲ 'Count' in 'EPROM/FLASH Simulator'

Format:	<b>Count.Mode</b> [ <i>&lt;mode&gt;</i> ]
<i>&lt;mode&gt;</i> :	<b>Frequency</b> <b>Period</b> <b>PulsLow</b> <b>PulsHigh</b> <b>EventLow</b> <b>EventHigh</b> <b>EventHOLD</b>


Select mode of the counter.

Frequency

Frequency measurement. The range is up to 20 MHz on external signals and up to 80 MHz for CLOCK and VCO measurement. Depending on the gate time the resolution is from 0.2 Hz to 800 Hz, which is displayed behind the result in the display window.


Period

Period time. The resolution is 100 ns, the maximum range up to 300 days



PulsHigh

Measurement of time between the rising and the falling edge




PulsLow

Measurement of time between the falling and the rising edge




### EventHigh

Event count on rising edges




### EventLow

Event count on falling edges



### EventHOLD

The event count is stopped. On starting the previous event count mode, the counter is not cleared.



```
Count.Mode PulsHigh      ; pulse time high
Count.Mode Period        ; period duration
Count.Mode EventHigh     ; event count rising edge
Count.Mode EventHOLD     ; stop event count
Count.Mode EventHigh     ; continue event count
```

### See also

- [Count](#)
- [Count.state](#)
- ▲ ['Count' in 'EPROM/FLASH Simulator'](#)

Format:	<b>Count.OUT</b> [ON   OFF]
---------	-----------------------------

Default: OFF.

When enabled, the input signal of the counter module is forwarded to the Podbus Trigger system. From there it can be used with other devices connected to the Podbus chain. It is also possible to forward the signal to the trigger connector on the debug interface. This is done with [TrBus.Connect Out](#).

See also

- [■ Count](#)
- [■ Count.state](#)
- [▲ 'Count' in 'EPROM/FLASH Simulator'](#)

Count.PROfile

Graphic counter display

Format:	<b>Count.PROfile</b> [<gate>] [<scale>]
<gate>:	<b>0.1s   1.0s   10.0s</b>
<scale>:	<b>1 ... 32768.</b>

The count rate is displayed in graphic mode. The counter mode must be **EventHigh** or **EventLow**. The display is updated and shift every 100 ms or slower. The profiler system is a very effective subsystem to show transfer or interrupt rates in a running system (see also [Analyzer.PROfile](#)). An opened window may be zoomed by the function keys. An auto zooming feature displays the results always with the best vertical scaling. The auto zoom is switched off by supplying a scale factor, manual zoom or vertical scrolling. The scale factor must be a power of 2.

<b>NOTE:</b>	Open windows that make dualport memory access may influence the profiling window!
--------------	---

```

;---- profile interrupt rate -----

Break.Set INT_routine /Alpha      ; set address mark on beginning of
                                   ; interrupt routine
TrEvent.Select Alpha              ; set event selector to breakpoint
                                   ; alpha


Count.Mode EventLow               ; event measurement
Count.Select Event
Go                                ; start emulation
Count.PROfile                     ; display window

;---- profile data transfer rate -----

Break.Set V.RANGE(buffer1) /Alpha ; mark buffer area
TrEvent.Select Alpha              ; set event selector to breakpoint
                                   ; alpha

Count.Mode EventLow               ; event measurement
Count.Select Event
Go                                ; start emulation
Count.PROfile                     ; display window

```

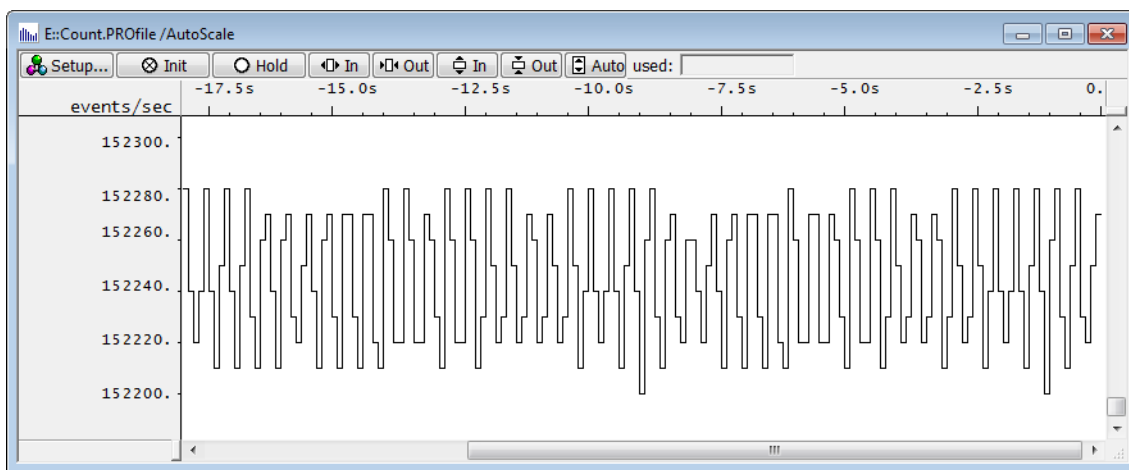

#### See also

- [Count](#)                      ■ [Count.state](#)
- ▲ ['Count' in 'EPROM/FLASH Simulator'](#)



Format:	Count.RESet
---------	-------------

The counter system is initialized to the reset state after power up.

See also

- [Count](#)
- [Count.state](#)
- ▲ ['Count' in 'EPROM/FLASH Simulator'](#)

Count.Select

Select input source

Format:	Count.Select [ <i>&lt;signal&gt;</i> ]
<i>&lt;signal&gt;</i> :	<div>VCO Clock CYcle ExtComp EXT Event PODBUS Port AlphaBreak BetaBreak CharlyBreak OUTD RESet Halt BusReq BusErr Vpa VCC BusGrant BusGrantAck E0   E1   E2   E3   E4   E5   E6   E7 T0   T1   T2   T3   T4   T5   T6   T7 T8   T9   T10   T11   T12   T13   T14   T15 B0   B1   B2   B3   B4   B5   B6   B7</div>

**Count.Select** controls the input multiplexer of the universal counter. The selected signal (named SIG) may be used as trigger source too. To see this signal on the EVENT output on the rear of the ECU box, use the **TriggerEvent.Select** command.

<b>Clock</b>	Clock frequency of the emulation CPU (external or internal)
<b>CYcle</b>	OUT.D Signal of the trigger unit (additional event counter or profiler).
<b>RESet, Halt, Bus-Req, BusGrant, ...</b>	Cycle signal of emulation CPU. Normally generated by the data strobe.
<b>PODBUS</b>	Signal selected by the external PODBUS probes.
<b>Port</b>	This signal is the channel selected by the port analyzer.
<b>B0, B1, B2, B3, B4, B5, B6, B7</b>	Inputs lines on BANK probe
<b>T0, T1, T2, T3, T4, T5, T6, T7</b>	Input lines on TRIGGER probe

See also

- [Count](#)
- [Count.state](#)
- ▲ ['Count' in 'EPROM/FLASH Simulator'](#)

Count.state

State display

Format:

Count.state

Displays the measurement value and setup of the frequency counter. The number of channels and the configuration depends on the development tool and the CPU used.


See also

- [Count](#)
- [Count.AutoInit](#)
- [Count.Gate](#)
- [Count.GO](#)
- [Count.Init](#)
- [Count.Mode](#)
- [Count.OUT](#)
- [Count.PROfile](#)
- [Count.RESet](#)
- [Count.Select](#)
- [Count.Frequency\(\)](#)
- [Count.LEVEL\(\)](#)
- [Count.Time\(\)](#)
- [Count.VALUE\(\)](#)
- ▲ ['Count' in 'EPROM/FLASH Simulator'](#)

COverage

Trace-based code coverage

The **COverage** command group uses the program flow information from the trace for a detailed code coverage analysis. The manual [“Application Note for Trace-Based Code Coverage”](#) (app\_code\_coverage.pdf) gives a detailed introduction to the topic.

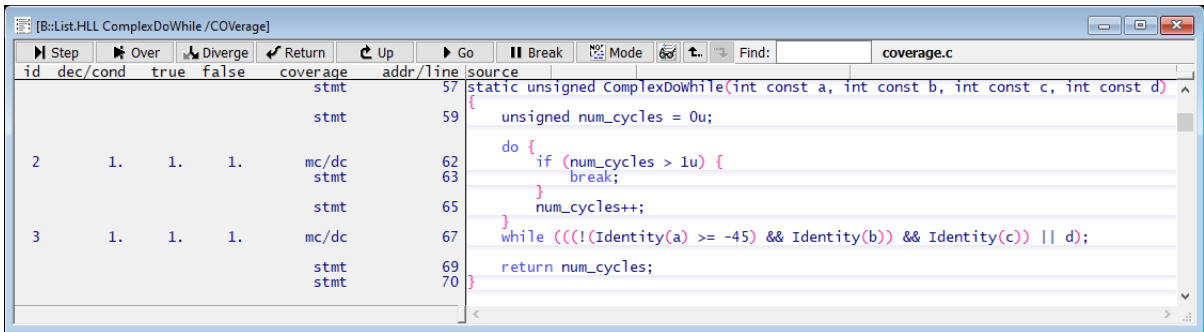

A demo script is included in your TRACE32 installation. To access the script, run this command:

```
ChDir.PSTEP ~/demo/t32cast/eca/measure_mcdc.cmm
```

See also

- COverage.ADD
  - COverage.List
  - COverage.ListInlineBlock
  - COverage.LOAD
  - COverage.OFF
  - COverage.SAVE
  - BookMark
  - COverage.SCOPE()
- COverage.Delete
  - COverage.ListCalleEs
  - COverage.ListLine
  - COverage.MAP
  - COverage.ON
  - COverage.Set
  - RTS
  - COverage.SourceMetric()
- COverage.EXPORT
  - COverage.ListCalleRs
  - COverage.ListModule
  - COverage.METHOD
  - COverage.Option
  - COverage.state
  - COverage.BDONE()
  - COverage.TreeWalk()
- COverage.Init
  - COverage.ListFunc
  - COverage.ListVar
  - COverage.Mode
  - COverage.RESet
  - COverage.TreeWalkSETUP
  - COverage.Percentage()
- ▲ 'Introduction' in 'Application Note for t32cast'

▲ 'COverage Functions' in 'General Function Reference'

COverage.ADD

Add trace contents to database

Format:

**COverage.ADD** [/<option>]  
<trace>.**COverage.add** (deprecated)

<option>:

**FILE**  
**FlowTrace** | **BusTrace**

The trace contents is processed and added to the coverage database.

<b>FILE</b>	Takes trace memory contents loaded by <a href="#">Trace.FILE</a> .
<b>FlowTrace</b>	The trace works as a program flow trace. This option is usually not required.
<b>BusTrace</b>	Trace works as a bus trace. This option is usually not required.

**Example:**

```
Analyzer.Mode Stack           ; clear trace buffer and use stack mode
Go sieve                      ; run a part of the application
...
COverage.ADD                  ; process the trace buffer
```

**See also**

- [COverage](#)
- [COverage.state](#)
- ▲ 'Trace Data Collection' in 'Application Note for Trace-Based Code Coverage'

COverage.Delete

Modify coverage

Format:

COverage.Delete [<address> | <range>]

Marks the defined range as '**never**' executed.

**See also**

- [COverage](#)
- [COverage.state](#)
- ▲ 'Trace Data Collection' in 'Application Note for Trace-Based Code Coverage'

Using the **COverage.EXPORT** commands, you can export code coverage information for all HLL functions, lines, modules, or variables to an XML file.

In addition, TRACE32 provides an XSL transformation template for formatting the XML file. The formatting is automatically applied to the XML file when it is opened in an external browser window. Prerequisite: The XSL file is placed in the same folder as the XML file.

For an export example and demo scripts, see [COverage.EXPORT.ListFunc](#).

See also

- [COverage.EXPORT.CBA](#)
  - [COverage.EXPORT.JSON](#)
  - [COverage.EXPORT.ListCalleEs](#)
  - [COverage.EXPORT.ListCalleRs](#)
  - [COverage.EXPORT.ListFunc](#)
  - [COverage.EXPORT.ListInlineBlock](#)
  - [COverage.EXPORT.ListLine](#)
  - [COverage.EXPORT.ListModule](#)
  - [COverage.EXPORT.ListVar](#)
  - [COverage](#)
  - [ISTATistic.EXPORT](#)
  - [SETUPXSLTSTYLESHEET](#)
  - ▲ ['Release Information' in 'Legacy Release History'](#)
- [COverage.EXPORT.CSV](#)
  - [COverage.EXPORT.JSONE](#)
  - [COverage.EXPORT.ListCalleEs.<sub\\_cmd>](#)
  - [COverage.EXPORT.ListCalleRs.<sub\\_cmd>](#)
  - [COverage.EXPORT.ListFunc.<sub\\_cmd>](#)
  - [COverage.EXPORT.ListInlineBlock.<sub\\_cmd>](#)
  - [COverage.EXPORT.ListLine.<sub\\_cmd>](#)
  - [COverage.EXPORT.ListModule.<sub\\_cmd>](#)
  - [COverage.EXPORT.ListVar.<sub\\_cmd>](#)
  - [COverage.state](#)
  - [List.EXPORT](#)

COverage.EXPORT.CBA

Export HLL lines in CBA format

Format:

**COverage.EXPORT.CBA** *<file>* [/Append]



Exports coverage information about HLL lines to a file in CBA format for import to VectorCAST/CBA.

<i>&lt;file&gt;</i>	The default extension of the file name is <b>*.cba</b> . If you omit the extension, it is added automatically on file creation.
---------------------	---

Example:

```
COverage.state
COverage.Option.SourceMetric Statement
COverage.Option.BLOCKMode ON ;for a comparison of ON and OFF, see below

COverage.EXPORT.CBA ~~\hll-lines-blockmode-on.cba
```

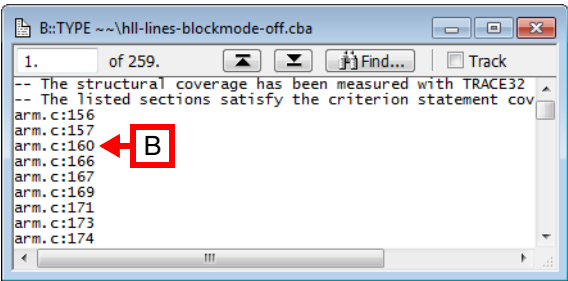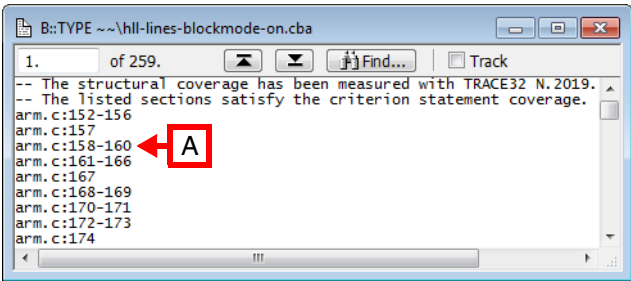

- A With **COVERAGE.Option.BLOCKMode** ON, the line number range for each entry is printed.
- B With **COVERAGE.Option.BLOCKMode** OFF, only the number of the last line is printed.

See also

- [COVERAGE.EXPORT](#)
- [COVERAGE.Option.BLOCKMode](#)

COVERAGE.EXPORT.CSV

Export coverage data in CSV format

Format:	<b>COVERAGE.EXPORT.CSV</b> <i>&lt;file&gt;</i> [ <i>&lt;string&gt;</i>   <i>&lt;range&gt;</i> ] [ <i>/&lt;option&gt;</i> ]
<i>&lt;option&gt;</i> :	<b>Append</b>

Exports coverage information in CSV format.

<i>&lt;file&gt;</i>	The default extension of the file name is <b>*.csv</b> . If you omit the extension, it is added automatically on file creation.
---------------------	---

For a description of the command line arguments, a screenshot of an export example, and PRACTICE script examples, see [COVERAGE.EXPORT.ListFunc](#).

<b>Append</b>	Appends the coverage information to an existing CSV file - without overwriting the current file contents.
---------------	---

See also

- [COVERAGE.EXPORT](#)
- ▲ 'Release Information' in 'Legacy Release History'

Format:	<b>COverage.EXPORT.JSON</b> <file>
---------	------------------------------------

Exports coverage information about functions and lines to a file in JSON format compatible to Gcov.

<file>	The default extension of the file name is <b>*.json</b> . If you omit the extension, it is added automatically on file creation.
--------	--

Example 1:

```
; Process trace data for coverage
COverage.Add
; Export to JSON
COverage.EXPORT.JSON ~/result.json
```

Example 2:

```
; Process trace data for coverage
COverage.Add
; Process trace for ISTATistic (needed for export of execution count)
ISTATistic.Add
; Export to JSON
COverage.EXPORT.JSON ~/result.json
```

See also

- [COverage.EXPORT.JSONE](#) ■ [COverage.EXPORT](#)
- ▲ ['Release Information' in 'Legacy Release History'](#)

COverage.EXPORT.JSONE

Export code coverage in extended JSON format

Format:	<b>COverage.EXPORT.JSONE</b> <file>
---------	-------------------------------------

Exports coverage information about functions and lines measured with TRACE32 to a file in an extended JSON format. Only functions for which symbols have been loaded are exported.

Unlike JSON files exported with the [COverage.EXPORT.JSON command](#), JSONE files are not Gcov compatible.

Files in extended JSON format are used as input for t32covertool. This format can also be used by third-party tools to generate a code coverage report from code coverage data measured with TRACE32.

<code>&lt;file&gt;</code>	The default extension of the file name is <b>*.json</b> . If you omit the extension, it is added automatically on file creation.
---------------------------	--

#### Example 1:

```
; Process trace data for coverage
COverage.Add
; Export to JSON
COverage.EXPORT.JSONE ~/result.json
```

#### Example 2:

```
; Process trace data for coverage
COverage.Add
; Process trace for ISTATistic (needed for export of execution count)
ISTATistic.Add
; Export to JSON
COverage.EXPORT.JSONE ~/result.json
```

#### See also

- [COverage.EXPORT.JSON](#)    ■ [COverage.EXPORT](#)
- ▲ ['TRACE32 Merge and Report Tool' in 'Application Note for Trace-Based Code Coverage'](#)



See also

- [COverage.EXPORT.ListCalleEs.<sub\\_cmd>](#)
- [COverage.EXPORT](#)
- ▲ ['Release Information' in 'Legacy Release History'](#)

Format:	<b>COverage.EXPORT.ListCalleEs.&lt;sub_cmd&gt;</b>
<sub_cmd>:	<b>ADDRESS</b> [<file>] [<source_file>...] [/<option>] <b>preset</b> [<file>] [%<format>] [<filter>] [/<option>] <b>SOURCE</b> [<file>] [<source_file>...] [/<option>] <b>sYmbol</b> [<file>] [<symbol>...] [/<option>]
<option>:	<b>Append</b>

Exports coverage information for function callees to an XML file.

The following <sub\_cmd> are possible:

<b>ADDRESS</b>	Uses addresses to control which coverage information for function callees to export.
<b>preset</b>	If the command contains no parameters, then all function callees are exported. The <filter> parameter allows to reduce the number of functions to that which is in the focus of the code coverage analysis.
<b>SOURCE</b>	Uses the names of source files to control which coverage information for function callees to export. The syntax of the pathname is oriented towards the <b>symbol</b> and <b>path</b> columns in the <b>sYmbol.Browse.SOURCE</b> window.
<b>sYmbol</b>	Defines a filter for the symbols of the HLL function callees to export.
<file>, <option>	For descriptions, see <b>COverage.EXPORT.ListFunc.</b>
<source_file>, <symbol>	You can use one or more items as filter criteria. The wildcards ‘*’ and ‘?’ are supported. Only items matching the filter criteria are displayed.

See also

- [COverage.EXPORT.ListCalleEs](#)
- [COverage.EXPORT](#)
- [COverage.ListCalleEs](#)

See also

- [COverage.EXPORT.ListCalleRs.<sub\\_cmd>](#)
- [COverage.EXPORT](#)
- ▲ ['Release Information' in 'Legacy Release History'](#)

Format:	<b>COverage.EXPORT.ListCalleRs.&lt;sub_cmd&gt;</b>
<sub_cmd>:	<b>ADDRESS</b> [<file>] [<source_file>...] [/<option>] <b>preset</b> [<file>] [%<format>] [<filter>] [/<option>] <b>SOURCE</b> [<file>] [<source_file>...] [/<option>] <b>sYmbol</b> [<file>] [<symbol>...] [/<option>]
<option>:	<b>Append</b>

Exports coverage information for function callers to an XML file.

The following <sub\_cmd> are possible:

<b>ADDRESS</b>	Uses addresses to control which coverage information for function callers to export.
<b>preset</b>	If the command contains no parameters, then all function callers are exported. The <filter> parameter allows to reduce the number of functions to that which is in the focus of the code coverage analysis.
<b>SOURCE</b>	Uses the names of source files to control which coverage information for function callers to export. The syntax of the pathname is oriented towards the <b>symbol</b> and <b>path</b> columns in the <b>sYmbol.Browse.SOURCE</b> window.
<b>sYmbol</b>	Defines a filter for the symbols of the HLL function callers to export.
<file>, <option>	For descriptions, see <a href="#">COverage.EXPORT.ListFunc.</a>
<source_file>, <symbol>	You can use one or more items as filter criteria. The wildcards ‘*’ and ‘?’ are supported. Only items matching the filter criteria are displayed.

See also

- [COverage.EXPORT.ListCalleRs](#)
- [COverage.EXPORT](#)
- [COverage.ListCalleRs](#)

See also

- COverage.EXPORT.ListFunc.<sub\_cmd>
- COverage.EXPORT
- COverage.ListFunc

COverage.EXPORT.ListFunc.<sub\_cmd>

Export HLL function information

Format:

COverage.EXPORT.ListFunc.<sub\_cmd>

<sub\_cmd>:

ADDRESS [<file>] [<source\_file>...] [/<option>]  
preset [<file>] [%<format>] [<filter>] [/<option>]  
SOURCE [<file>] [<source\_file>...] [/<option>]  
sYmbol [<file>] [<symbol>...] [/<option>]

<option>:

Append

Exports coverage information about the HLL function to an XML file.

The following <sub\_cmd> are possible:

ADDRESS	Exports code coverage information for functions filtered by source file.
preset	If the command contains no parameters, then all the HLL function are exported. The <filter> parameter allows to reduce the number of functions to that which is in the focus of the code coverage analysis.
SOURCE	Exports code coverage information for source code lines filtered by source file. The syntax of the pathname is oriented towards the <b>symbol</b> and <b>path</b> columns in the <b>sYmbol.Browse.SOURCE</b> window.
sYmbol	Defines a filter for the symbols of the HLL function to export.
<file>, <option>	For descriptions, see <b>COverage.EXPORT.ListFunc</b> .
<source_file>, <symbol>	You can use one or more items as filter criteria. The wildcards ‘*’ and ‘?’ are supported. Only items matching the filter criteria are displayed.

Examples:

```
COVerage.EXPORT.ListFunc.ADDRESS output.xml P:0x00000000--0x90000000
```

```
COVerage.EXPORT.ListFunc.SOURCE output.xml "*sieve.c"
```

```
;In this script line, only the symbol main as well as symbols matching  
;the patterns func? and *eve* are exported  
COVerage.EXPORT.ListFunc.sYmbol ~~\coverage.xml    main    func?    *eve*
```

Example of an XML export file opened in an external browser window:

### TRACE32 Export

1. COVerage.ListModule

2. COVerage.ListFunc

3. COVerage.ListLine

4. COVerage.ListVar

Table of Contents: Click to jump to the table you want.

#### 1. COVerage.ListModule

address	tree	coverage	executed	0%	50%	100%	branches	ok	taken	not taken	never	bytes	bytesok
R:104C--22F7	\armle\arm	partial	87.531%				83.673%	41	3	0	5	4780	4184
	none						?		?	?	?		
R:104C--22F7	total	partial	87.531%				83.673%	41	3	0	5	4780	4184

#### 2. COVerage.ListFunc

address	tree	coverage	executed	0%	50%	100%	branches	ok	taken	not taken	never	bytes	bytesok
R:104C--22F7	\armle\arm	partial	87.531%				83.673%	41	3	0	5	4780	4184
R:104C--1053	func0	never	0.000%				-	0	0	0	0	8	0
R:1054--1063	func1	ok	100.000%				-	0	0	0	0	16	16
R:1064--110F	func2	partial	100.000%				100.000%	1	0	0	0	172	172
R:1110--115F	func2a	ok	100.000%				100.000%	1	0	0	0	80	80
R:1160--11A3	func2b	ok	100.000%				100.000%	1	0	0	0	68	68

☐ ASM

☒ Mixed

☐ HLL

Keys: t:Top, s:Source, b:Bookmarks, m:Modules, f:Functions, v:Variables, l:List, a:ASM, x:Mixed, h:HLL

color☒

Click to toggle the display of the listing.

Press these keys to jump to the table you want.

<file>

Name of the XML file that stores the code coverage information. The file extension \*.xml can be omitted.

<string>

Defines a filter for the source files that you want to export. The filter consists of the file path and refers only to source files that are listed in the **tree** column of a **COVerage.ListFunc**, **COVerage.ListModule**, etc. window.

Example for <string>:

```
;export the code coverage information for all HLL functions with
;a source path that matches the pattern "*/gnu/sub/*"
COVerage.EXPORT.ListFunc C:\t32\coverage.xml "*/gnu/sub/*"

;export the code coverage information for all modules with a file path
;that matches the pattern "*crt0.s"
COVerage.EXPORT.ListModule C:\t32\coverage.xml "*crt0.s" /Append
```

<range>

Filter for exporting the specified address range or symbol range.

The address range can be specified as follows:

- Start and end address.
- Only start address. Exports items from the start address up to the maximum address of the current address space.

The symbol range can be specified as program, module, or function.

**Example:** This script line exports code coverage information for three symbol ranges.

```
;export the code coverage information for three symbol ranges
COVerage.EXPORT.ListFunc C:\t32\coverage.xml \\myprog\func13 func10 \
                                                    \\prog2
```

**NOTE:**

The backslash \ can be used as a line continuation character in PRACTICE script files (\*.cmm). No white space permitted after the backslash.

APPEND

Appends the coverage information to an existing XML file - without overwriting the current file contents.

SOrder, TOrder

SOrder	Sort in source line order.
TOrder	Sort by address.

## Example 1:

**Prerequisite:** The debug symbols have been loaded and trace data has been recorded.

This script shows how to export code coverage information for all modules, HLL functions, lines, and variables to the same XML file. The formatted file is then opened in an external browser window.

```
COVerage.ADD                ;update the coverage database
COVerage.ListModule         ;display coverage of all modules
COVerage.ListFunc          ;display coverage of all functions
COVerage.ListLine          ;display coverage of all source lines
COVerage.ListVar           ;display coverage of all variables

;export the code coverage information for all modules of
;program "armle"
COVerage.EXPORT.ListModule "~/coverage.xml" \\armle

;export the code coverage information for all HLL functions of the
;module "arm" and append to an existing file
COVerage.EXPORT.ListFunc   "~/coverage.xml" \arm    /Append

;export the code coverage information for all HLL lines of the
;function "sieve" and append to an existing file
COVerage.EXPORT.ListLine   "~/coverage.xml" sieve  /Append

;export the code coverage information for HLL variables
;and append to an existing file
COVerage.EXPORT.ListVar    "~/coverage.xml" ,      /Append

;for demo purposes: let's open the unformatted result in TRACE32
EDIT "~/coverage.xml"

;place the transformation template in the same folder as the XML file
COPY "~/demo/coverage/single_file_report/t32transform.xsl" \
    "~/t32transform.xsl"

;you can now open the formatted result in an external browser window
OS.Command start iexplore.exe "file:///C:/t32/coverage.xml"
```

The tildes ~ expand to your TRACE32 system directory, (e.g. C:\T32).



## Example 2:

---

A more complex demo script is included in your TRACE32 installation. To access the script, run this command:

```
CD.PSTEP ~/demo/coverage/example.cmm
```

This demo script also tells you how to include a listing in the XML export file.

## See also

---

■ [COVerage.EXPORT.ListFunc](#)

■ [COVerage.ListFunc](#)

■ [COVerage.EXPORT](#)

See also

- [COverage.EXPORT.ListInlineBlock.<sub\\_cmd>](#)
- [COverage.EXPORT](#)

Format:	<b>COVerge.EXPORT.ListInlineBlock.&lt;sub_cmd&gt;</b>
<sub_cmd>:	<b>ADDRESS</b> [<file>] [<source_file>...] [/<option>] <b>preset</b> [<file>] [%<format>] [<filter>] [/<option>] <b>SOURCE</b> [<file>] [<source_file>...] [/<option>] <b>sYmbol</b> [<file>] [<symbol>...] [/<option>]
<option>:	<b>Append</b>

Exports coverage information about inlined code blocks to an XML file.

The following <sub\_cmd> are possible:

<b>ADDRESS</b>	Uses addresses to control which coverage information for inlined code blocks to export.
<b>preset</b>	If the command contains no parameters, then all inlined code blocks are exported. The <filter> parameter allows to reduce the number of functions to that which is in the focus of the code coverage analysis.
<b>SOURCE</b>	Uses the names of source files to control which coverage information for inlined code blocks to export. The syntax of the pathname is oriented towards the <b>symbol</b> and <b>path</b> columns in the <b>sYmbol.Browse.SOURCE</b> window.
<b>sYmbol</b>	Defines a filter for the symbols of the inlined code blocks to export.
<file>, <option>	For descriptions, see <a href="#">COVerge.EXPORT.ListFunc</a> .
<source_file>, <symbol>	You can use one or more items as filter criteria. The wildcards ‘*’ and ‘?’ are supported. Only items matching the filter criteria are displayed.

See also

- [■ COVerge.EXPORT.ListInlineBlock](#)
- [■ COVerge.EXPORT](#)
- [■ COVerge.ListInlineBlock](#)

See also

- [COverage.EXPORT.ListLine.<sub\\_cmd>](#)
- [COverage.EXPORT](#)
- [COverage.ListLine](#)

Format:	<b>COVerge.EXPORT.ListLine.&lt;sub_cmd&gt;</b>
<sub_cmd>:	<b>ADDRESS</b> [<file>] [<source_file>...] [/<option>] <b>preset</b> [<file>] [%<format>] [<filter>] [/<option>] <b>SOURCE</b> [<file>] [<source_file>...] [/<option>] <b>sYmbol</b> [<file>] [<symbol>...] [/<option>]
<option>:	<b>Append</b>

Exports coverage information about HLL lines to an XML file.

The following <sub\_cmd> are possible:

<b>ADDRESS</b>	Uses addresses to control which coverage information for source code lines to export.
<b>preset</b>	If the command contains no parameters, then all HLL lines are exported. The <filter> parameter allows to reduce the number of functions to that which is in the focus of the code coverage analysis.
<b>SOURCE</b>	Uses the names of source files to control which coverage information for source code lines to export. The syntax of the pathname is oriented towards the <b>symbol</b> and <b>path</b> columns in the <b>sYmbol.Browse.SOURCE</b> window.
<b>sYmbol</b>	Defines a filter for the symbols of the HLL lines to export.
<file>, <option>	For descriptions, see <a href="#">COVerge.EXPORT.ListFunc</a> .
<source_file>, <symbol>	You can use one or more items as filter criteria. The wildcards ‘*’ and ‘?’ are supported. Only items matching the filter criteria are displayed.

See also

- [COVerge.EXPORT.ListLine](#)
- [COVerge.EXPORT](#)
- [COVerge.ListLine](#)

See also

- [COverage.EXPORT.ListModule.<sub\\_cmd>](#)
- [COverage.EXPORT](#)
- [COverage.ListModule](#)

COverage.EXPORT.ListModule.<sub\_cmd>

Export modules information

Format:

COverage.EXPORT.ListModule.<sub\_cmd>

<sub\_cmd>:

ADDRESS [*<file>*] [*<source\_file>...*] [/<option>]  
preset [*<file>*] [%<format>] [<filter>] [/<option>]  
SOURCE [*<file>*] [*<source\_file>...*] [/<option>]  
sYmbol [*<file>*] [<symbol>...] [/<option>]

<option>:

Append

Exports coverage information bout modules to an XML file.

The following <sub\_cmd> are possible:

ADDRESS	Uses addresses to control which coverage information for modules to export.
preset	If the command contains no parameters, then all modules are exported. The <filter> parameter allows to reduce the number of functions to that which is in the focus of the code coverage analysis.
SOURCE	Uses the names of source files to control which coverage information for modules to export. The syntax of the pathname is oriented towards the <b>symbol</b> and <b>path</b> columns in the <a href="#">sYmbol.Browse.SOURCE</a> window.
sYmbol	Defines a filter for the symbols of the modules to export.
<file>, <option>	For descriptions, see <a href="#">COverage.EXPORT.ListFunc</a> .
<source_file>, <symbol>	You can use one or more items as filter criteria. The wildcards ‘*’ and ‘?’ are supported. Only items matching the filter criteria are displayed.

See also

- [COverage.EXPORT.ListModule](#)
- [COverage.EXPORT](#)
- [COverage.ListModule](#)

See also

- COVerage.EXPORT.ListVar.<sub\_cmd>
- COVerage.EXPORT
- COVerage.ListVar

COVerage.EXPORT.ListVar.<sub\_cmd>

Export HLL variables information

Format:	COVerage.EXPORT.ListVar.<sub_cmd>
<sub_cmd>:	<b>ADDRESS</b> [<file>] [<source_file>...] [/<option>] <b>preset</b> [<file>] [%<format>] [<filter>] [/<option>] <b>SOURCE</b> [<file>] [<source_file>...] [/<option>] <b>sYmbol</b> [<file>] [<symbol>...] [/<option>]
<option>:	<b>Append</b>

Exports coverage information for HLL variables to an XML file.

The following <sub\_cmd> are possible:

<b>ADDRESS</b>	Uses addresses to control which coverage information for variables to export.
<b>preset</b>	If the command contains no parameters, then all HLL variables are exported. The <filter> parameter allows to reduce the number of functions to that which is in the focus of the code coverage analysis.
<b>SOURCE</b>	Uses the names of source files to control which coverage information for variables to export. The syntax of the pathname is oriented towards the <b>symbol</b> and <b>path</b> columns in the <b>sYmbol.Browse.SOURCE</b> window.
<b>sYmbol</b>	Defines a filter for the symbols of the HLL variables to export.
<file>, <option>	For descriptions, see <b>COVerage.EXPORT.ListFunc</b> .
<source_file>, <symbol>	You can use one or more items as filter criteria. The wildcards '*' and '?' are supported. Only items matching the filter criteria are displayed.

See also

- COVerage.EXPORT.ListVar
- COVerage.EXPORT
- COVerage.ListVar

Format:

COverage.Init  
<trace>.COverage.Init (deprecated)

Deletes all code coverage information for HLL source code statements, assembly instructions and data values.

See also

- COverage
- COverage.state


COverage.List

Coverage display

Format:

COverage.List [<address> | <range>]  
<trace>.COverage.List (deprecated)

Displays the results of the coverage analysis.

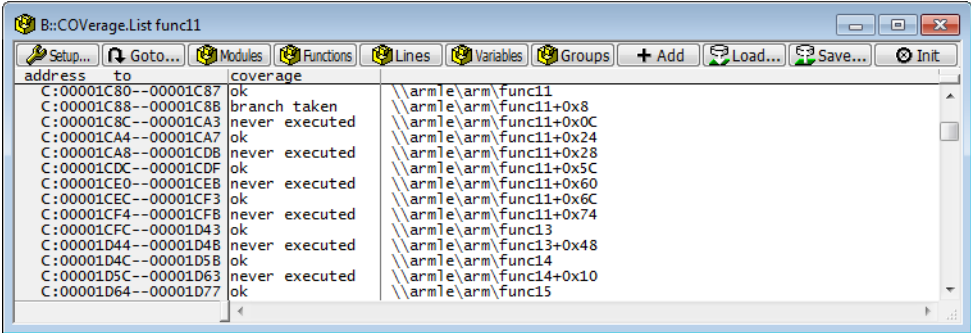

Double-clicking a line opens a **List** window, showing the context of and more details about the covered code.

See also

- COverage.ListCalleEs
- COverage.ListFunc
- COverage.ListLine
- COverage.ListModule
- COverage.ListVar
- COverage
- COverage.state



See also

- [COverage.ListCalleRs](#)
  - [COverage.ListFunc](#)
  - [COverage.ListLine](#)
  - [COverage.ListVar](#)
  - [COverage](#)
  - [COverage.state](#)

▲ 'Release Information' in 'Legacy Release History'
- [COverage.List](#)
  - [COverage.ListInlineBlock](#)
  - [COverage.ListModule](#)
  - [COverage.LOAD](#)
  - [COverage.EXPORT.ListCalleEs.<sub\\_cmd>](#)

COverage.ListCalleEs.<sub\_cmd>

Display coverage for callees function

Format:	<b>COverage.ListCalleEs.&lt;sub_cmd&gt;</b>
<sub_cmd>:	<b>ADDRESS</b> [%<format>] [<address>   <address_range>] [/<option>] <b>preset</b> [%<format>] [<filter>] [/<option>] <b>SOURCE</b> [%<format>] [<source>...] [/<option>] <b>sYmbol</b> [%<format>] [<symbol>...] [/<option>]
<format>:	<b>SINGLE   MULTI   DO178</b>
<option>:	<b>SOrder   TOrder</b>

Displays the results of the code coverage analysis related to function callees. If the metric Call is set (see [COverage.Option SourceMetric Call](#)) callee details are part of the report generated with the help of the TRACE32 Coverage Report Utility.

The following <sub\_cmd> are possible:

<b>ADDRESS</b>	Allows to restrict the displayed function callees to a specified address range.
<b>preset</b>	If the command contains no parameters, then all function callees are displayed (see example 1). The <filter> parameter allows to reduce the number of functions to that which is in the focus of the code coverage analysis (see example 2).
<b>SOURCE</b>	Allows to restrict the displayed function callees to the specified source files. The syntax of the pathname is oriented towards the <b>symbol</b> and <b>path</b> columns in the <a href="#">sYmbol.Browse.SOURCE</a> window (see example 3).

<b>sYmbol</b>	Allows to restrict the displayed callees to the specified symbol ranges. The symbol names are oriented towards the <b>symbol</b> column in the <b>sYmbol.Browse.Function</b> or <b>sYmbol.Browse.Module</b> window (see example 4).
<code>&lt;symbol&gt;</code> , <code>&lt;source&gt;</code>	You can use one or more items as filter criteria. The wildcards '*' and '?' are supported. Only items matching the filter criteria are displayed. See commands <b>sYmbol.FILTER.ADD.sYmbol</b> and <b>sYmbol.FILTER.ADD.SOURCE</b> .

## Format Parameters SINGLE, MULTI, DO178

<b>SINGLE</b>	The code coverage results are displayed only for the selected metric.
<b>MULTI</b>	The code coverage results are displayed for the selected metric and all included metrics. E.g. the MCDC metric includes also CONdition, Decision and Statement coverage.
<b>DO178</b>	The code coverage results are displayed for the selected metric and all included metrics that are relevant for DO178. E.g. the MCDC metric includes also Decision and Statement coverage.

## Option SOrder, TOrder

<b>SOrder</b>	Display the source code lines belonging to a function in <b>source order</b> .
<b>TOrder</b>	Display the source code lines belonging to a function in <b>target order</b> (default).

## Example 1:

```
COverage.Option SourceMetric Call
...
COverage.ListCalleEs
```

address	tree	coverage	call	0%	50%	100%	func	ok	calls	ok	bytes	ok
P:08000798--08000823	TestSwitchCase	incomplete	41.666%				1.	0.	12.	5.	140.	80.
SR:08000788--08000788	coverage\coverage \175--176	never	0.000%				0.	0.	0.	0.	4.	0.
SR:080007C0--080007C3	coverage\coverage \177--177	never	0.000%				0.	0.	0.	0.	4.	0.
SR:080007C8--080007C8	coverage\coverage \178--178	never	0.000%				0.	0.	0.	0.	4.	0.
SR:080007D0--080007D3	coverage\coverage \179--179	never	0.000%				0.	0.	0.	0.	4.	0.
SR:080007D8--080007D8	coverage\coverage \180--180	never	0.000%				0.	0.	0.	0.	4.	0.
SR:080007E0--080007E3	coverage\coverage \181--182	never	0.000%				0.	0.	0.	0.	4.	0.
SR:080007E8--080007EB	coverage\coverage \183--183	never	0.000%				0.	0.	0.	0.	4.	0.
SR:080007F4--080007F7	coverage\coverage \184--187	ok	100.000%				0.	0.	0.	0.	4.	4.
SR:080007FC--080007FF	coverage\coverage \188--188	ok	100.000%				0.	0.	0.	0.	4.	4.
SR:08000804--08000807	coverage\coverage \189--189	ok	100.000%				0.	0.	0.	0.	4.	4.
SR:0800080C--0800080F	coverage\coverage \190--190	ok	100.000%				0.	0.	0.	0.	4.	4.
SR:08000814--08000817	coverage\coverage \191--191	ok	100.000%				0.	0.	0.	0.	4.	4.
P:08000824--080008AF	MultiLine	call	100.000%				1.	1.	0.	0.	140.	108.
P:080008B0--08000947	TestMultiLine	call	100.000%				1.	1.	2.	2.	152.	148.
SR:08000914--08000917	coverage\coverage \231--231	ok	100.000%				0.	0.	0.	0.	4.	4.
SR:08000934--08000937	coverage\coverage \236--236	ok	100.000%				0.	0.	0.	0.	4.	4.

Double-clicking a line displays the function or call and detailed information about the code coverage in a [List](#) window.

### Example 2:

```
COverage.Option SourceMetric Call
...
sYmbol.Browse.Module
sYmbol.FILTER.ADD.sYmbol jd_modules \jdcolor \jdmarker \jdtrans
COverage.ListCalleEs.preset jd_modules
```

### Example 3:

```
sYmbol.Browse.SOURCE
COverage.ListCalleEs.SOURCE \
"D:/work/demo/mpc5xxx/mpc5646c_jpeg/jdapistd.c" \
"D:/work/demo/mpc5xxx/mpc5646c_jpeg/jdinput.c" \
"D:/work/demo/mpc5xxx/mpc5646c_jpeg/jdpostct.c"
```

```
COverage.ListCalleEs.SOURCE \ "*jdc*.c"
```

### Example 4:

```
sYmbol.Browse.Module
COverage.ListCalleEs.sYmbol \jdapistd \jdmaster \jidctred
```

```
COverage.ListCalleEs.sYmbol \jda*
```

See also

- COverage.ListCalleEs
- COverage.EXPORT.ListCalleRs.<sub\_cmd>
- ▲ 'Release Information' in 'Legacy Release History'
- COverage
- COverage.state

COverage.ListCalleRs.<sub\_cmd>

Display coverage for callers function

Format:	COverage.ListCalleRs.<sub_cmd>
<sub_cmd>:	<b>ADDRESS</b> [%<format>] [<address>   <address_range>] [/<option>] <b>preset</b> [%<format>] [<filter>] [/<option>] <b>SOURCE</b> [%<format>] [<source>...] [/<option>] <b>sYmbol</b> [%<format>] [<symbol>...] [/<option>]
<format>:	<b>SINGLE</b>   <b>MULTI</b>   <b>DO178</b>
<option>:	<b>SOrder</b>   <b>TOrder</b>

Displays the results of the code coverage analysis related to function callees. If the metric Call is set (see [COverage.Option SourceMetric Call](#)) callee details are part of the report generated with the help of the TRACE32 Coverage Report Utility.

The following <sub\_cmd> are possible:

<b>ADDRESS</b>	Allows to restrict the displayed function callers to a specified address range.
<b>preset</b>	If the command contains no parameters, then all function callers are displayed (see example 1). The <filter> parameter allows to reduce the number of functions to that which is in the focus of the code coverage analysis (see example 2).
<b>SOURCE</b>	Allows to restrict the displayed function callers to the specified source files. The syntax of the pathname is oriented towards the <b>symbol</b> and <b>path</b> columns in the <a href="#">sYmbol.Browse.SOURCE</a> window (see example 3).

<b>sYmbol</b>	Allows to restrict the displayed callers to the specified symbol ranges. The symbol names are oriented towards the <b>symbol</b> column in the <b>sYmbol.Browse.Function</b> or <b>sYmbol.Browse.Module</b> window (see example 4).
<i>&lt;symbol&gt;</i> , <i>&lt;source&gt;</i>	You can use one or more items as filter criteria. The wildcards '*' and '?' are supported. Only items matching the filter criteria are displayed. See commands <b>sYmbol.FILTER.ADD.sYmbol</b> and <b>sYmbol.FILTER.ADD.SOURCE</b> .

## Format Parameters SINGLE, MULTI, DO178


<b>SINGLE</b>	The code coverage results are displayed only for the selected metric.
<b>MULTI</b>	The code coverage results are displayed for the selected metric and all included metrics. E.g. the MCDC metric includes also CONdition, Decision and Statement coverage.
<b>DO178</b>	The code coverage results are displayed for the selected metric and all included metrics that are relevant for DO178. E.g. the MCDC metric includes also Decision and Statement coverage.

## Option SOrder, TOrder

<b>SOrder</b>	Display the source code lines belonging to a function in <b>source order</b> .
<b>TOrder</b>	Display the source code lines belonging to a function in <b>target order</b> (default).

## Example 1:

```
COverage.Option SourceMetric Call
...
COverage.ListCallers
```

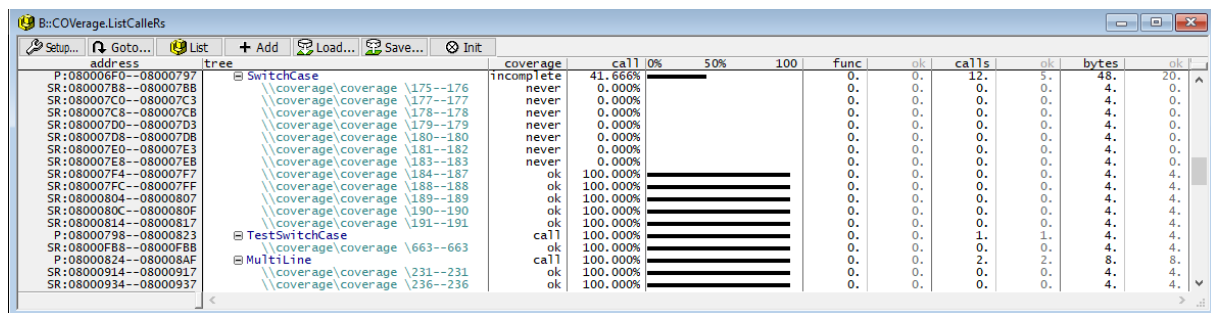

address	tree	coverage	call	0%	50%	100%	func	ok	calls	ok	bytes	ok
P:080006F0--08000797	SwitchCase	incomplete	41.666%				0.	0.	12.	5.	48.	20.
SR:080007B8--080007B8	\\coverage\coverage \175--176	never	0.000%				0.	0.	0.	0.	4.	0.
SR:080007C0--080007C3	\\coverage\coverage \177--177	never	0.000%				0.	0.	0.	0.	4.	0.
SR:080007C8--080007C8	\\coverage\coverage \178--178	never	0.000%				0.	0.	0.	0.	4.	0.
SR:080007D0--080007D3	\\coverage\coverage \179--179	never	0.000%				0.	0.	0.	0.	4.	0.
SR:080007D8--080007D8	\\coverage\coverage \180--180	never	0.000%				0.	0.	0.	0.	4.	0.
SR:080007E0--080007E3	\\coverage\coverage \181--182	never	0.000%				0.	0.	0.	0.	4.	0.
SR:080007E8--080007E8	\\coverage\coverage \183--183	never	0.000%				0.	0.	0.	0.	4.	0.
SR:080007F4--080007F7	\\coverage\coverage \184--187	ok	100.000%				0.	0.	0.	0.	4.	4.
SR:080007FC--080007FF	\\coverage\coverage \188--188	ok	100.000%				0.	0.	0.	0.	4.	4.
SR:08000804--08000807	\\coverage\coverage \189--189	ok	100.000%				0.	0.	0.	0.	4.	4.
SR:0800080C--0800080F	\\coverage\coverage \190--190	ok	100.000%				0.	0.	0.	0.	4.	4.
SR:08000814--08000817	\\coverage\coverage \191--191	ok	100.000%				0.	0.	0.	0.	4.	4.
P:08000798--08000823	TestSwitchCase	call	100.000%				0.	0.	1.	1.	4.	4.
SR:08000FB8--08000FB8	\\coverage\coverage \663--663	ok	100.000%				0.	0.	0.	0.	4.	4.
P:08000824--080008AF	MultiLine	call	100.000%				0.	0.	2.	2.	8.	8.
SR:08000914--08000917	\\coverage\coverage \231--231	ok	100.000%				0.	0.	0.	0.	4.	4.
SR:08000934--08000937	\\coverage\coverage \236--236	ok	100.000%				0.	0.	0.	0.	4.	4.

Double-clicking a line displays the function or call and detailed information about the code coverage in a [List](#) window.

### Example 2:

```
COverage.Option SourceMetric Call
...
sYmbol.Browse.Module
sYmbol.FILTER.ADD.sYmbol jd_modules \jdcolor \jdmarker \jdtrans
COverage.ListCalleRs.preset jd_modules
```

### Example 3:

```
sYmbol.Browse.SOURCE
COverage.ListCalleRs.SOURCE \
"D:/work/demo/mpc5xxx/mpc5646c_jpeg/jdapistd.c" \
"D:/work/demo/mpc5xxx/mpc5646c_jpeg/jdinput.c" \
"D:/work/demo/mpc5xxx/mpc5646c_jpeg/jdpostct.c"
```

```
COverage.ListCalleRs.SOURCE \ "*jdc*.c"
```

### Example 4:

```
sYmbol.Browse.Module
COverage.ListCalleRs.sYmbol \jdapistd \jdmaster \jidctred
```

```
COverage.ListCalleRs.sYmbol \jda*
```

See also

- COverage.ListFunc.<sub\_cmd>
  - COverage.ListCalleEs
  - COverage.ListModule
  - COverage.EXPORT.ListFunc
  - COverage.state
  - ▲ 'Trace Data Collection' in 'Application Note for Trace-Based Code Coverage'
  - ▲ 'Release Information' in 'Legacy Release History'
- COverage.List
  - COverage.ListLine
  - COverage
  - COverage.EXPORT.ListFunc.<sub\_cmd>

COverage.ListFunc.<sub\_cmd>

Display coverage for HLL function

Format:

COverage.ListFunc.<sub\_cmd>

<sub\_cmd>:

ADDRESS [%<format>] [<address> | <address\_range>] [/<option>]  
preset [%<format>] [<filter>] [/<option>]  
SOURCE [%<format>] [<source>...] [/<option>]  
sYmbol [%<format>] [<symbol>...] [/<option>]

<format>:

SINGLE | MULTI | DO178 | OBC

<option>:

SOrder | TOrder

Displays the results of the code coverage analysis related to HLL functions based on the selected metric (see [COverage.Option SourceMetric](#)).

The following <sub\_cmd> are possible:

<b>ADDRESS</b> <b>COverage.ListFunc</b> (deprecated)	Allows to restrict the displayed functions to a specified address range.
<b>preset</b> <b>COverage.ListFunc</b> (deprecated)	If the command contains no parameters, then all HLL functions are displayed (see example 1). The <filter> parameter allows to reduce the number of functions to that which is in the focus of the code coverage analysis (see example 2).
<b>SOURCE</b>	Allows to restrict the displayed functions to the specified source files. The syntax of the pathname is oriented towards the <b>symbol</b> and <b>path</b> columns in the <a href="#">sYmbol.Browse.SOURCE</a> window (see example 3).

<b>sYmbol</b>	Allows to restrict the displayed functions to the specified symbol ranges. The symbol names are oriented towards the <b>symbol</b> column in the <b>sYmbol.Browse.Function</b> or <b>sYmbol.Browse.Module</b> window (see example 4).
<i>&lt;symbol&gt;</i> , <i>&lt;source&gt;</i>	You can use one or more items as filter criteria. The wildcards '*' and '?' are supported. Only items matching the filter criteria are displayed. See commands <b>sYmbol.FILTER.ADD.sYmbol</b> and <b>sYmbol.FILTER.ADD.SOURCE</b> .

**Format Parameters SINGLE, MULTI, DO178, OBC**

<b>SINGLE</b>	The code coverage results are displayed only for the selected metric.
<b>MULTI</b>	The code coverage results are displayed for the selected metric and all included metrics. E.g. the MCDC metric includes also CONdition, Decision and Statement coverage.
<b>DO178</b>	The code coverage results are displayed for the selected metric and all included metrics that are relevant for DO178. E.g. the MCDC metric includes also Decision and Statement coverage.
<b>OBC</b>	Includes object code branch coverage results if <b>COverage.Option.SourceMetric Statement</b> is set.

**Option SOrder, TOrder**

<b>SOrder</b>	Display the source code lines belonging to a function in <b>source order</b> .
<b>TOrder</b>	Display the source code lines belonging to a function in <b>target order</b> (default).

**Example 1:**

```
COverage.Option SourceMetric Statement

...

COverage.ListFunc
```





```
COVerage.ListFunc.SOURCE \ "*jdc*.c"
```

#### Example 4:

```
sYmbol.Browse.Module
```

```
COVerage.ListFunc.sYmbol \jdapistd \jdmaster \jidctred
```

```
COVerage.ListFunc.sYmbol \jda*
```

#### See also

---

■ [COVerage.ListFunc](#)

See also

- COverage.ListCalleEs
- COverage.EXPORT.ListInlineBlock.<sub\_cmd>
- COverage
- COverage.state

COverage.ListInlineBlock.<sub\_cmd>

Display coverage for inlined block

Format:	COverage.ListInlineBlock.<sub_cmd>
<sub_cmd>:	ADDRESS [%<format>] [<address>   <address_range>] [/<option>] preset [%<format>] [<filter>] [/<option>] SOURCE [%<format>] [<source>...] [/<option>] sYmbol [%<format>] [<symbol>...] [/<option>]
<format>:	SINGLE   MULTI   DO178
<option>:	SOrder   TOrder

Displays the result of the code coverage analysis related to inlined code blocks based on the selected metric (see [COverage.Option SourceMetric](#)). The command [sYmbol.List.InlineBlock](#) provides a list of all inlined code blocks.

The following <sub\_cmd> are possible:

ADDRESS	Allows to restrict the displayed blocks to a specified address range.
preset	<p>When compiling with optimization the compiler may insert functions or parts of a function directly instead of adding a call to the function. This command lists all parts of the code where function parts have been inlined by the compiler and displays the code coverage result for the individual blocks.</p> <p>If the command contains no parameters, then all inline blocks are displayed (see example1).</p> <p>The commands <a href="#">sYmbol.FILTER.ADD.SOURCE</a> and <a href="#">sYmbol.FILTER.ADD.sYmbol</a> allow to combine source files/symbols of interest under a &lt;filter&gt;. The &lt;filter&gt; parameter allows to reduce the number of inlined blocks to that which is in the focus of the code coverage analysis. This is especially useful for very large projects (see example 2).</p>
SOURCE	Allows to restrict the displayed inlined blocks to the specified source files. The syntax of the pathname is oriented towards the <b>symbol</b> and <b>path</b> columns in the <a href="#">sYmbol.Browse.SOURCE</a> window (see example 3).

<b>sYmbol</b>	Allows to restrict the displayed inlined blocks to the specified symbol ranges. The symbol names are oriented towards the <b>symbol</b> column in the <b>sYmbol.Browse.Function</b> or <b>sYmbol.Browse.Module</b> window (see example 4).
<code>&lt;symbol&gt;</code> , <code>&lt;source&gt;</code>	Instead of listing the sources individually, they can also be combined under a filter name. See commands <b>sYmbol.FILTER.ADD.sYmbol</b> and <b>sYmbol.FILTER.ADD.SOURCE</b> . The wildcards '*' and '?' are supported.

## Format Parameters SINGLE, MULTI, DO178

<b>SINGLE</b>	The code coverage results are displayed only for the selected metric.
<b>MULTI</b>	The code coverage results are displayed for the selected metric and all included metrics. E.g. the MCDC metric includes also CONdition, Decision and Statement coverage.
<b>DO178</b>	The code coverage results are displayed for the selected metric and all included metrics that are relevant for DO178. E.g. the MCDC metric includes also Decision and Statement coverage.

## Option SOrder, TOrder

<b>SOrder</b>	Display the source code lines belonging to a function in <b>source order</b> .
<b>TOrder</b>	Display the source code lines belonging to a function in <b>target order</b> (default).

## Example 1:

```
COVerge.Option SourceMetric Statement
```

```
...
```

```
COVerge.ListInlineBlock
```

address	tree	coverage	objectcode	0%	50%	100	branches	ok	taken	not taken	never
C:FFFFFFFF--00000000	⊟ Funcl										
P:000006A2--000006A5	\sieveopt\sieve \146--149	ok	100.000%					0.	0.	0.	
P:0000089C--0000089F	\sieveopt\sieve \146--149	ok	100.000%					0.	0.	0.	
P:00000896--00000899	\sieveopt\sieve \146--149	ok	100.000%					0.	0.	0.	
P:000008AA--000008AF	\sieveopt\sieve \146--149	ok	100.000%					0.	0.	0.	
P:000008C6--000008C9	\sieveopt\sieve \146--149	ok	100.000%					0.	0.	0.	
P:000008D8--000008DB	\sieveopt\sieve \146--149	ok	100.000%					0.	0.	0.	
C:FFFFFFFF--00000000	⊟ subst										
P:00000928--00000981	\sieveopt\sieve \568--573	partial	66.666%					0.	0.	1.	
P:00000A08--00000A1F	\sieveopt\sieve \568--573	partial	33.333%					0.	0.	0.	
P:00000A20--00000A9F	\sieveopt\sieve \568--573	partial	62.500%					1.	0.	0.	
P:00000098--000000AF	⊟ func2a										
P:000006B6--000006B8	\sieveopt\sieve \181--185	ok	100.000%					0.	0.	0.	
P:000006BE--000006BF	\sieveopt\sieve \181--185	ok	100.000%					0.	0.	0.	
P:000006C6--000006C9	\sieveopt\sieve \186--188	ok	100.000%					0.	0.	0.	

Double-clicking a line displays the block and detailed information about the code coverage in a [List](#) window.

### Example 2:

```
COverage.Option SourceMetric Statement
...
sYmbol.Browse.Module
sYmbol.FILTER.ADD.sYmbol jd_modules \jdcolor \jdmarker \jdtrans
COverage.ListInlineBlock.preset jd_modules
```

### Example 3:

```
sYmbol.Browse.SOURCE
COverage.ListInlineBlock.SOURCE \
"D:/work/demo/mpc5xxx/mpc5646c_jpeg/jdapistd.c" \
"D:/work/demo/mpc5xxx/mpc5646c_jpeg/jdinput.c" \
"D:/work/demo/mpc5xxx/mpc5646c_jpeg/jdpostct.c"
```

```
COverage.ListInlineBlock.SOURCE \ "*jdc*.c"
```

### Example 4:

```
sYmbol.Browse.Module
COverage.ListInlineBlock.sYmbol \jdapistd \jdmaster \jidctred
```

```
COverage.ListInlineBlock.sYmbol \jda*
```

See also

- [COverage.ListLine.<sub\\_cmd>](#)
  - [COverage.ListCalleEs](#)
  - [COverage.ListModule](#)
  - [COverage.EXPORT.ListLine](#)
  - [COverage.state](#)

▲ ['Release Information' in 'Legacy Release History'](#)
- [COverage.List](#)
  - [COverage.ListFunc](#)
  - [COverage](#)
  - [COverage.EXPORT.ListLine.<sub\\_cmd>](#)

COverage.ListLine.<sub\_cmd>

Display coverage for HLL lines

Format:

COverage.ListLine.<sub\_cmd>

<sub\_cmd>:

ADDRESS [%<format>] [<address> | <address\_range>] [/<option>]  
preset [%<format>] [<filter>] [/<option>]  
SOURCE [<source\_file>...] [/<option>]  
sYmbol [%<format>] [<symbol>...] [/<option>]

<format>:

SINGLE | MULTI | DO178 | OBC

<option>:

SOrder | TOrder

Displays the result of the code coverage analysis related to HLL lines based on the selected metric (see [COverage.Option SourceMetric](#)).

The following <sub\_cmd> are possible:

<b>ADDRESS</b> COverage.ListLine (deprecated)	Allows to restrict the displayed lines to a specified address range.
<b>preset</b>	If the command contains no arguments, then all HLL lines are displayed. If the <filter> argument is passed, then only items matching the filter criteria are displayed (see example 1).
<b>SOURCE</b>	Lists lines using <source_file> as filter criterion. The syntax of the pathname is oriented towards the <b>symbol</b> and <b>path</b> columns in the <a href="#">sYmbol.Browse.SOURCE</a> window.
<b>sYmbol</b>	Defines a filter for the symbols of the HLL lines to view.
<symbol>, <source_file>	You can use one or more items as filter criteria. The wildcards ‘*’ and ‘?’ are supported. Only items matching the filter criteria are displayed.

SINGLE	The code coverage results are displayed only for the selected metric.
MULTI	The code coverage results are displayed for the selected metric and all included metrics. E.g. the MCD C metric includes also CONDition, Decision and Statement coverage.
DO178	The code coverage results are displayed for the selected metric and all included metrics that are relevant for DO178. E.g. the MCD C metric includes also Decision and Statement coverage.
OBC	Includes object code branch coverage results if <b>COverage.Option.SourceMetric Statement</b> is set.

Option SOrder, TOrder

SOrder	Display the source code lines belonging to a function in <b>source order</b> .
TOrder	Display the source code lines belonging to a function in <b>target order</b> (default).

Example 1:

```
COverage.ADD                                ;Update the coverage database

COverage.ListLine "*chario.c"              ;Display all items which contain the
                                           ;file chario.c
COverage.ListLine main                     ;Display coverage for function main
```

Example 2:

```
COverage.ListLine.SOURCE "*sieve.c"
```

See also

- [COverage.ListLine](#)

See also

- COVerage.ListModule.<sub\_cmd>
  - COVerage.ListCalleEs
  - COVerage.ListLine
  - COVerage.EXPORT.ListModule
  - COVerage.state

▲ 'Release Information' in 'Legacy Release History'
- COVerage.List
  - COVerage.ListFunc
  - COVerage
  - COVerage.EXPORT.ListModule.<sub\_cmd>

COVerage.ListModule.<sub\_cmd>

Display coverage for modules

Format:

COVerage.ListModule.<sub\_cmd>

<sub\_cmd>:

ADDRESS [%<format>] [<address> | <address\_range>] [/<option>]  
preset [%<format>] [<filter>] [/<option>]  
SOURCE [<source\_file>...] [/<option>]  
sYmbol [%<format>] [<symbol>...] [/<option>]

<format>:

SINGLE | MULTI | DO178 | OBC

<option>:

SOrder | TOrder

Displays the result of the code coverage analysis related to modules based on the selected metric (see [COVerage.Option SourceMetric](#)).

The following <sub\_cmd> are possible:

<b>ADDRESS</b> COVerage.ListMod- ule (deprecated)	Allows to restrict the displayed modules to a specified address range.
<b>preset</b>	Displays the results of the coverage analysis related to modules. Double-clicking a line displays the function and detailed information about the coverage. If the command contains no arguments, then all modules are displayed. If <filter> argument is passed, then only items matching the filter criteria are displayed (see example 1).
<b>SOURCE</b>	Lists modules using <source_file> as filter criterion. The syntax of the pathname is oriented towards the <b>symbol</b> and <b>path</b> columns in the <a href="#">sYmbol.Browse.SOURCE</a> window.



<b>sYmbol</b>	Defines a filter for the symbols of the modules to view.
<code>&lt;symbol&gt;</code> , <code>&lt;source_file&gt;</code>	You can use one or more items as filter criteria. The wildcards ‘*’ and ‘?’ are supported. Only items matching the filter criteria are displayed.

**Format Parameters SINGLE, MULTI, DO178, OBC**

<b>SINGLE</b>	The code coverage results are displayed only for the selected metric.
<b>MULTI</b>	The code coverage results are displayed for the selected metric and all included metrics. E.g. the MCDC metric includes also CONdition, Decision and Statement coverage.
<b>DO178</b>	The code coverage results are displayed for the selected metric and all included metrics that are relevant for DO178. E.g. the MCDC metric includes also Decision and Statement coverage.
<b>OBC</b>	Includes object code branch coverage results if <b>COverage.Option.SourceMetric Statement</b> is set.

**Option SOrder, TOrder**

<b>SOrder</b>	Display the source code lines belonging to a function in <b>source order</b> .
<b>TOrder</b>	Display the source code lines belonging to a function in <b>target order</b> (default).

**Example 1:**

```
COverage.Option SourceMetric Statement
...
COverage.ListModule
```

address	tree	coverage	statement	0%	50%	100%	lines	ok	bytes	ok
P:00000000--00000208	\crt0	incomplete	6.250%				16.	1.	64.	4.
P:00000210--00000433	\portASM	incomplete	96.296%				54.	52.	516.	440.
P:00000440--0000068F	\freertos	incomplete	22.222%				45.	10.	596.	88.
P:00000690--00000E97	\midi	incomplete	66.379%				116.	77.	2056.	1184.
P:00000690--000006A3	\vQueueConsumeHook	stmt	100.000%				2.	2.	20.	20.
P:000006A4--000006E3	\vQueueConsume	incomplete	60.000%				5.	3.	64.	40.
P:000006E4--00000777	\vStackEater	incomplete	0.000%				6.	0.	148.	0.
P:00000778--0000079B	\vStackEatTask	incomplete	0.000%				4.	0.	36.	0.
P:0000079C--000007CB	\func1	stmt	100.000%				3.	3.	48.	48.
P:000007CC--0000089B	\func2	stmt	100.000%				12.	12.	208.	208.
P:0000089C--00000933	\func9	stmt	100.000%				13.	13.	152.	152.
P:00000934--00000A23	\int_sin	incomplete	0.000%				9.	0.	240.	0.
P:00000A24--00000AB3	\func_sin	incomplete	0.000%				5.	0.	144.	0.
P:00000AB4--00000B57	\func13	stmt	100.000%				8.	8.	164.	164.
P:00000B58--00000D13	\SieveDemo	incomplete	77.777%				27.	21.	444.	376.
P:00000D14--00000DC3	\sieve	stmt	100.000%				15.	15.	176.	176.
P:00000DC4--00000E97	\vCreateMidiDemo	incomplete	0.000%				7.	0.	212.	0.
P:00000E98--00001BF7	\coverage	incomplete	97.435%				234.	228.	3420.	3308.
P:00001BF8--00002637	\queue	incomplete	42.541%				181.	77.	2624.	1084.

Double-clicking a line displays the module and detailed information about the code coverage in a [List](#) window.

### Example 2:

```
COVerge.Option SourceMetric Statement
...
sYmbol.Browse.Module
sYmbol.FILTER.ADD.sYmbol jd_modules \crt0 \freertos \midi
COVerge.ListModule.preset jd_modules
```

address	tree
P:00000690--00000E97	\midi
P:00000690--000006A3	\vQueueConsumeHook
P:000006A4--000006E3	\vQueueConsume
P:000006E4--00000777	\vStackEater
P:00000778--0000079B	\vStackEatTask
P:0000079C--000007CB	\func1
P:000007CC--0000089B	\func2
P:0000089C--00000933	\func9
P:00000934--00000A23	\int_sin
P:00000A24--00000AB3	\func_sin
P:00000A24--00000A2F	\midi.c \147--149
P:00000A30--00000A3B	\midi.c \150--151
P:00000A3C--00000A93	\midi.c \152--152
P:00000A94--00000AAB	\midi.c \150--151
P:00000A4C--00000AB3	\midi.c \153--153
P:00000AB4--00000B57	\func13
P:00000B58--00000D13	\SieveDemo

address	tree
P:00000690--00000E97	\midi
P:00000690--000006A3	\vQueueConsumeHook
P:000006A4--000006E3	\vQueueConsume
P:000006E4--00000777	\vStackEater
P:00000778--0000079B	\vStackEatTask
P:0000079C--000007CB	\func1
P:000007CC--0000089B	\func2
P:0000089C--00000933	\func9
P:00000934--00000A23	\int_sin
P:00000A24--00000AB3	\func_sin
P:00000A24--00000A2F	\midi.c \147--149
P:00000A30--00000A3B	\midi.c \150--151
P:00000A94--00000AAB	\midi.c \150--151
P:00000A3C--00000A93	\midi.c \152--152
P:00000A4C--00000AB3	\midi.c \153--153
P:00000AB4--00000B57	\func13
P:00000B58--00000D13	\SieveDemo

### Example 3:

```
COVerge.ListModule.sYmbol \main
```

#### See also

- [COVerge.ListModule](#)

See also

- COverage.ListVar.<sub\_cmd>
  - COverage.ListCalleEs
  - COverage.EXPORT.ListVar
  - COverage.state
- COverage.List
  - COverage
  - COverage.EXPORT.ListVar.<sub\_cmd>
- ▲ 'Appendix D: Data Coverage' in 'Application Note for Trace-Based Code Coverage'

COverage.ListVar.<sub\_cmd>

Display coverage for variables

Format:


COverage.ListVar.<sub\_cmd>

<sub\_cmd>:

ADDRESS [<address> | <address\_range>]  
preset [<filter>]  
SOURCE [<source\_file>...]  
sYmbol [<symbol>...]

Displays the result of the data coverage analysis for source code variables if the source metric ObjectCode is set (**COverage.Option SourceMetric ObjectCode**).


Since off-chip trace ports usually do not have enough bandwidth to make all read/write accesses (and the program flow) visible, they are rather unsuitable for data coverage. For test phases in which testing in the target environment is not yet required, a TRACE32 Instruction Set Simulator can be used well for data coverage.



If the program and data flow is broadcast via an offchip trace port (e.g. ARM-ETM or NEXUS), **COverage.ListVar** displays an accurate result only if the trace does not contain **FIFOFULLs**.

The following `<sub_cmd>` are possible:

<b>ADDRESS</b> <b>COVeRage.ListVar</b> (deprecated)	Allows to restrict the displayed variables to a specified address range.
<b>preset</b>	If the command contains no arguments, then all variables are displayed. If <code>&lt;filter&gt;</code> argument is passed, then only items matching the filter criteria are displayed (see examples).
<b>SOURCE</b>	Lists variables using <code>&lt;source_file&gt;</code> as filter criterion. The syntax of the pathname is oriented towards the <b>symbol</b> and <b>path</b> columns in the <b>Symbol.Browse.SOURCE</b> window.
<b>sYmbol</b>	List variable by using a module or program name as filter criterion.
<code>&lt;symbol&gt;</code> , <code>&lt;source_file&gt;</code>	You can use one or more items as filter criteria. The wildcards <code>'*'</code> and <code>'?'</code> are supported. Only items matching the filter criteria are displayed.

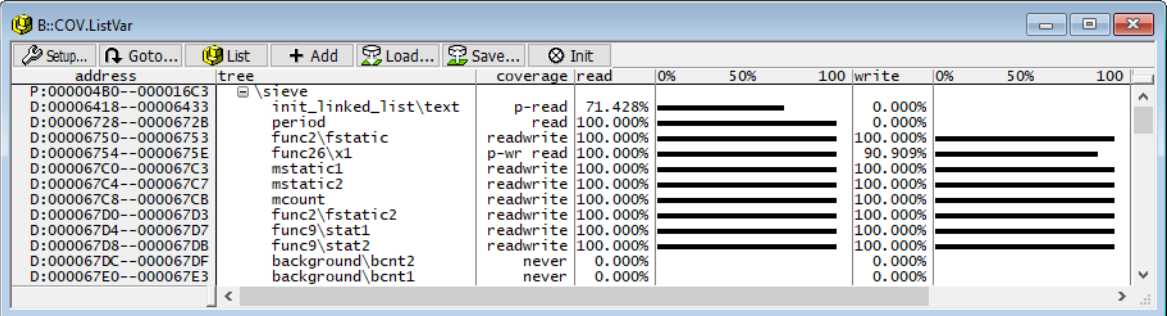

Examples:

```
Trace.FLOWPROCESS ; Process the whole trace

Trace.Find FIFOFULL /ALL ; Display the number of FIFOFULLs
PRINT %Decimal FOUND.COUNT()

COVeRage.ADD ; Add the trace contents to the
; coverage system

COVeRage.ListVar
```

A filter allows to limit the result to the variables of interest.

```
sYmbol.Filter.ADD.sYmbol vardiacb \diabc      ; create a filter that
                                              ; represents the module
                                              ; \diabc

COVerage.ADD                                  ; Add the trace contents
                                              ; to the coverage system

COVerage.ListVar vardiacb                    ; display data coverage
                                              ; only for the variables
                                              ; of the module \diabc
```

---

#### See also

■ [COVerage.ListVar](#)

Format:	<b>COverage.LOAD</b> <file> [/<option>] <trace>. <b>COverage.LOAD</b> (deprecated)
<option>:	<b>Replace</b> <b>ADD</b> <b>SUBtract</b>

Loads the code coverage information from a file. The currently available code coverage information is discarded.

<file>	Name of the file with a previously saved code coverage data set. The default extension of the file name is <b>*.acd</b> . The file extension <b>*.acd</b> can be omitted.
<b>Replace</b> (default)	Removes the current coverage information of TRACE32 and replaces it with the stored coverage data set of the file.
<b>ADD</b>	Keeps the current coverage information of TRACE32 and updates it with the stored coverage data set of the file.
<b>SUBtract</b>	Removes all coverage information of TRACE32 that is also present in the stored coverage data set of the file.

See also

- [COverage.ListCalleEs](#)[COverage](#)[COverage.state](#)
- ▲ 'Appendix B: Assemble Multiple Test Runs at Address Level' in 'Application Note for Trace-Based Code Coverage'

Format:	<b>COverage.MAP</b> <source> <destination> [/<option>]
<option>:	<b>Replace</b> <b>ADD</b> <b>SUBtract</b>

Allows to summarize the coverage of a code section that is available several times in a program, e.g. a shared library that is used more the once.

Maps the code coverage of a source range to a destination range. Both ranges have to have the same length.

<source>	The address range whose code coverage is mapped to another one.
<destination>	The address range whose code coverage is updated.
<b>Replace</b>	Removes the current coverage information of the destination range and replaces it with the coverage data of the source range.
<b>ADD</b>	Keeps the current coverage information of the destination range, but updates it with the coverage data of the source range.
<b>SUBtract</b>	Removes all coverage information of the destination range that is also present in the coverage data set of the source range.

See also

- [COverage](#)
- [COverage.state](#)

Format:

COverage.METHOD INCRemental | SPY | RTS | ART | Hardware

TRACE32 supports various code coverage methods. The code coverage method **INCRemental** is supported for all processor architectures, as long as information about the executed instructions is recorded by a TRACE32 trace tool or by an onchip trace buffer. All other methods are subject to restrictions.

INCRemental	<p>INCRemental code coverage is based on the trace recording. After the trace recording stopped the command <b>COverage.ADD</b> can be used to add the current trace recording to the code coverage database.</p> <p>Incremental code coverage is the preferred method for the <b>Trace.Modes</b> Fifo, Stack and Leash, but it can also be used in conjunction with the <b>Trace.Mode</b> STREAM.</p>
SPY	<p>SPY code coverage is based on the trace recording. It can only be selected if the <b>Trace.Mode</b> STREAM is active. While trace data is being recorded, streaming to the host is automatically interrupted at regular intervals in order to update the coverage database.</p> <p>SPY code coverage is only recommended if the processor/trace protocol in use is not supported by RTS. For setup details, refer to the chapter <b>“SPY Mode Code Coverage”</b> in Application Note for Trace-Based Code Coverage, page 65 (app_code_coverage.pdf).</p> <p>SPY code coverage is only possible for static code and is otherwise subject to the same restrictions as <b>Trace.Mode</b> STREAM.</p>
RTS	<p>RTS stands for Real-time Processing. The COverage.METHOD RTS is automatically enabled if <b>RTS.ON</b>. Trace data are processed while recording and a live display of the code coverage results is possible. For details refer to the examples given in the description of the <b>RTS</b> command group.</p> <p>RTS code coverage is subject to the same restrictions as the <b>RTS</b> command group.</p>
ART	<p>ART code coverage is based on the assembler single steps recorded to the TRACE32 Advanced Register Trace <b>ART</b>. The code coverage database is updated after every single step.</p> <p>ART code coverage is only supported for a limited number of processor architectures. If you processor architecture is not supported, the ART method will be grayed out in the <b>COverage</b> window and the <b>COverage.METHOD ART</b> command will return a “command locked” error. Please contact in this case the Lauterbach technical support.</p>



See also

- COverage
- COverage.state
- Analyzer.Mode
- ART
- RTS.ON
- ▲ 'Trace Data Collection' in 'Application Note for Trace-Based Code Coverage'
- ▲ 'Release Information' in 'Legacy Release History'

COverage.Mode

Activate code coverage for virtual targets

Format:	COverage.Mode <mode>
<mode>:	FastCOverage [ON   OFF]

Activates code coverage for virtual targets with minimal trace activation.

FastCOverage	<p>Code coverage via the MCD interface. TRACE32 instructs a virtual target via the MCD interface to perform a code coverage analysis. Upon completion of the coverage analysis, the coverage information is imported to the TRACE32 coverage database with the <b>COverage.ADD</b> command.</p> <p>Prerequisite: <b>COverage.METHOD.INCremental</b> is selected in the <b>COverage.state</b> window.</p>
--------------	--

See also

- COverage
- COverage.state
- ▲ 'Trace Data Collection' in 'Application Note for Trace-Based Code Coverage'

COverage.OFF

Deactivate coverage

Format:	COverage.OFF
---------	--------------

Coverage data will not be recorded.

See also

- COverage
- COverage.state
- ▲ 'Trace Data Collection' in 'Application Note for Trace-Based Code Coverage'

Format:	COverage.ON
---------	-------------

Activates the currently selected [COverage.METHOD](#).

See also

- [COverage](#)
- [COverage.state](#)
- ▲ ['Trace Data Collection'](#) in ['Application Note for Trace-Based Code Coverage'](#)

Using the **COverage.Option** command group, you can configure how TRACE32 processes or displays code coverage data.

See also

- [■ COverage.Option.BLOCKMode](#)  
[■ COverage.Option.SourceMetric](#)  
[■ COverage](#)
- [■ COverage.Option.ITrace](#)  
[■ COverage.Option.StaticInfo](#)  
[■ COverage.state](#)

COverage.Option.BLOCKMode

Enable/disable line block mode

Format:

COverage.Option.BLOCKMode [ON | OFF]

Changes how code coverage measurements are applied to source code lines.

- ON

The code coverage result is applied to all associated source code lines.
- OFF

The code coverage result is applied only to the last source code line.

**Example:** Please refer to [COverage.EXPORT.CBA](#).

See also

- [■ COverage.Option](#)
- [■ COverage.EXPORT.CBA](#)

Format:

COVerage.Option.ITrace [ON | OFF]

TRACE32 does not record trace information about conditional instructions in the simulator. If a trace, which has been recorded on real hardware, should be loaded in the simulator, the additional info is processed.

- ON
- Conditional instruction trace is processed.
- OFF
- Only the simulator bus trace is processed.

See also

■ [COVerage.Option](#)

COVerage.Option.SourceMetric

Select code coverage metric

Format:

COVerage.Option.SourceMetric <criteria>

<criteria>:

Call  
CONDition  
Decision  
Function  
MCD  
ObjectCode  
Statement

Code coverage for the selected metric is performed based on the trace data.

ObjectCode	ObjectCode coverage is performed. See “ <a href="#">Object Code Coverage Evaluation</a> ” in Application Note for Trace-Based Code Coverage, page 76 (app_code_coverage.pdf).
Statement	Indicates if an HLL line has achieved the code coverage criterion <i>statement coverage</i> . See “ <a href="#">Statement Coverage Evaluation</a> ” in Application Note for Trace-Based Code Coverage, page 83 (app_code_coverage.pdf).
Decision	Indicates if an HLL line has achieved the code coverage criterion <i>decision coverage</i> . See “ <a href="#">Full Decision Coverage Evaluation</a> ” in Application Note for Trace-Based Code Coverage, page 87 (app_code_coverage.pdf).

<b>MCDC</b>	Modified condition/decision coverage (MC/DC). Indicates if an HLL line has achieved the code coverage criterion <i>modified condition/decision coverage</i> . See <a href="#">“Modified Condition/Decision Coverage (MC/DC) Evaluation”</a> in Application Note for Trace-Based Code Coverage, page 106 (app_code_coverage.pdf).
<b>Function</b>	Indicates if an HLL line has achieved the code coverage criterion <i>function coverage</i> . See <a href="#">“Function Coverage Evaluation”</a> in Application Note for Trace-Based Code Coverage, page 112 (app_code_coverage.pdf).
<b>Call</b>	Indicates if an HLL line has achieved the code coverage criterion <i>call coverage</i> . See <a href="#">“Call Coverage Evaluation”</a> in Application Note for Trace-Based Code Coverage, page 116 (app_code_coverage.pdf).

For selections other than **ObjectCode** the available debug symbol information is used to improve the accuracy of the code coverage. E.g. literal pools and alignment padding blocks are excluded from the code coverage calculations.

Blocks of assembly instructions are not affected by this option.

For more information about all the metrics, please refer to the chapter [“Code Coverage Analysis”](#) in Application Note for Trace-Based Code Coverage, page 76 (app\_code\_coverage.pdf).

#### See also

- [COverage.Option](#)      □ [COverage.SourceMetric\(\)](#)
- ▲ [‘Code Coverage Analysis’](#) in [‘Application Note for Trace-Based Code Coverage’](#)
- ▲ [‘Release Information’](#) in [‘Legacy Release History’](#)

Format:	<b>COverage.Option.StaticInfo</b> [ON   OFF]
---------	--

Performs the following precalculations for the code coverage if **ON**:

- **Object code coverage**
  - IT block preprocessing to improve the coverage results for ARM Thumb code.
  - Counting the conditional branches for the conditional branch analysis.
- **Statement and decision coverage**
  - Detection of literal pools and alignment padding blocks.
  - Counting the instructions for modules/functions without source code information.

<b>ON</b> (default)	Perform precalculations.
<b>OFF</b>	Do not perform precalculations (recommended in the case of issues with the code coverage).

See also

■ [COverage.Option](#)

Format:

**COVerage.RESet**  
<trace>.COVerage.RESet (deprecated)

Discards the complete code coverage information and restores the default code coverage settings.

See also

- [COVerage](#)
- [COVerage.state](#)
- ▲

['Trace Data Collection' in 'Application Note for Trace-Based Code Coverage'](#)

Format:

**COVerage.SAVE** <file>  
<trace>.COVerage.SAVE (deprecated)

Saves the code coverage information to a file.

<file>	The default extension of the file name is *.acd.
--------	--

See also

- [COVerage](#)
- [COVerage.state](#)
- ▲

['Appendix B: Assemble Multiple Test Runs at Address Level' in 'Application Note for Trace-Based Code Coverage'](#)

Format:	<b>COverage.Set</b> [ <i>&lt;address&gt;</i>   <i>&lt;range&gt;</i> ] <i>&lt;state&gt;</i> <i>&lt;trace&gt;.COverage.Set</i> (deprecated)
<i>&lt;state&gt;</i>	<b>NOTTAKEN</b> <b>TAKEN</b> <b>NOTEXEC</b> <b>ONLYEXEC</b> <b>OK</b>

Marks the defined range with the specified execution state. If the instruction is already marked with an execution state the new state is added incrementally.

See also


- [COverage](#)
- [COverage.state](#)



Format:

COverage.state

Opens the **COverage.state** window, where you can configure the code coverage analysis and display the results.

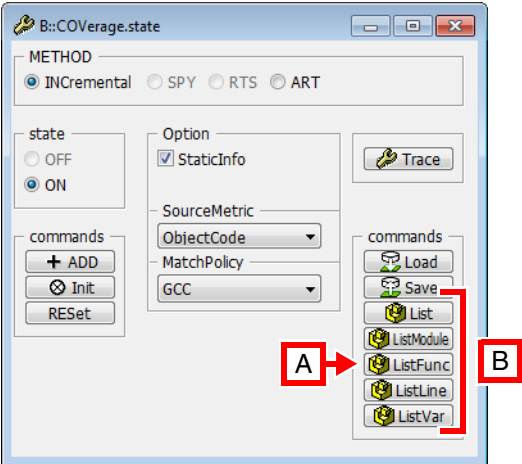

- A** For descriptions of the commands in the **COverage.state** window, please refer to the **COverage.\*** commands in this chapter.  
**Example:** For information about the **ListFunc** button, see [COverage.ListFunc](#).
- B** Click to display the results of the code coverage analysis.

See also

- |                                     |  |  |  |
|-------------------------------------|--|--|--|
| ■ <a href="#">COverage</a>          | ■ <a href="#">COverage.ADD</a>             | ■ <a href="#">COverage.Delete</a>      | ■ <a href="#">COverage.EXPORT</a>        |
| ■ <a href="#">COverage.Init</a>     | ■ <a href="#">COverage.List</a>            | ■ <a href="#">COverage.ListCalleEs</a> | ■ <a href="#">COverage.ListCalleRs</a>   |
| ■ <a href="#">COverage.ListFunc</a> | ■ <a href="#">COverage.ListInlineBlock</a> | ■ <a href="#">COverage.ListLine</a>    | ■ <a href="#">COverage.ListModule</a>    |
| ■ <a href="#">COverage.ListVar</a>  | ■ <a href="#">COverage.LOAD</a>            | ■ <a href="#">COverage.MAP</a>         | ■ <a href="#">COverage.METHOD</a>        |
| ■ <a href="#">COverage.Mode</a>     | ■ <a href="#">COverage.OFF</a>             | ■ <a href="#">COverage.ON</a>          | ■ <a href="#">COverage.Option</a>        |
| ■ <a href="#">COverage.RESet</a>    | ■ <a href="#">COverage.SAVE</a>            | ■ <a href="#">COverage.Set</a>         | ■ <a href="#">COverage.TreeWalkSETUP</a> |
| ■ <a href="#">RTS.OFF</a>           |  |  |  |

▲ 'Release Information' in 'Legacy Release History'

See also

- COVerage.TreeWalkSETUP.<sub\_cmd>
- COVerage.state
- COVerage
- COVerage.TreeWalk()

COVerage.TreeWalkSETUP.<sub\_cmd>

Prepare a coverage symbol tree

Format:

COVerage.TreeWalkSETUP.<sub\_cmd>

<sub\_cmd>:

ADDRESS [<address> | <address\_range>]  
preset [<filter>] [/<option>]  
SOURCE [<source\_file>]  
sYmbol [<symbol>...]

Prepares a tree with modules, functions, and HLL lines. The tree can be traversed with the PRACTICE function [COVerage.TreeWalk\(\)](#).

ADDRESS	Defines a filter for the addresses you want to include in the tree.
preset	If the command contains no parameters, then all symbols are included in the tree. The <filter> parameter allows to reduce the number of symbols.
SOURCE	Defines a filter for the source files you want to include in the tree. The syntax of the pathname is oriented towards the <b>symbol</b> and <b>path</b> columns in the <a href="#">sYmbol.Browse.SOURCE</a> window.
sYmbol	Defines a filter for the symbols you want to include in the tree.
<symbol>, <source>	You can use one or more items as filter criteria. The wildcards ‘*’ and ‘?’ are supported. Only items matching the filter criteria are displayed.

### Example:

```
PRIVATE &node

; create a tree with all symbols starting with "func"
COverage.TreeWalkSETUP.sYmbol func*

&node=COverage.TreeWalk("Init")           ; get the first tree element
WHILE "&node"!=" "
(
    IF STRing.SCAN("&node","\",0.)==0.      ; element is a module
    (
        PRINT "The next module is: &node"
    )
    ELSE IF STRing.SCAN("&node","--",0.)>-1. ; element is an HLL line
    (
        PRINT "The next HLL line is: &node"
    )
    ELSE                                     ; element is a function
    (
        PRINT "The next function is: &node"
    )
    &node=COverage.TreeWalk("Recurse")      ; get the next tree element
)
```

---

### See also

■ [COverage.TreeWalkSETUP](#)

CTS

Context tracking system (CTS)

**CTS (Context Tracking System)** is a technique that allows the context of the target system to be reconstructed for each single record sampled to the trace buffer. Context of the target system means here the contents of the CPU registers, the memories, the caches and TLBs (for selected architectures only).

See also

- [CTS.CACHE](#)

■ [CTS.FixedControl](#)

■ [CTS.List](#)

■ [CTS.ON](#)

■ [CTS.SELectiveTrace](#)

■ [CTS.STATistic](#)

■ [CTS.UseDataTrace](#)

■ [CTS.UseStartMemory](#)
- [CTS.CAPTURE](#)

■ [CTS.GOTO](#)

■ [CTS.ListNesting](#)

■ [CTS.PROCESS](#)

■ [CTS.SKIP](#)

■ [CTS.TAKEOVER](#)

■ [CTS.UseFinalContext](#)

■ [Go.Back](#)
- [CTS.Chart.sYmbol](#)

■ [CTS.INCremental](#)

■ [CTS.Mode](#)

■ [CTS.PROfileChart](#)

■ [CTS.SmartTrace](#)

■ [CTS.UNDO](#)

■ [CTS.UseFinalMemory](#)
- [CTS.EXPORT](#)

■ [CTS.Init](#)

■ [CTS.OFF](#)

■ [CTS.RESet](#)


■ [CTS.state](#)

■ [CTS.UseConst](#)

■ [CTS.UseSIM](#)
- ▲ ['Release Information' in 'Legacy Release History'](#)

# Trace-based Debugging

The main application for **CTS** is the so-called trace-based debugging. Trace-based debugging allows to re-run the program and data flow sampled to the trace buffer on the TRACE32 screen. Precondition to perform a full-featured trace-based debugging is that the complete program and data flow until the stop of the program execution is sampled to the trace buffer. Otherwise CTS has to be configured to give correct results (See **CTS.state**).

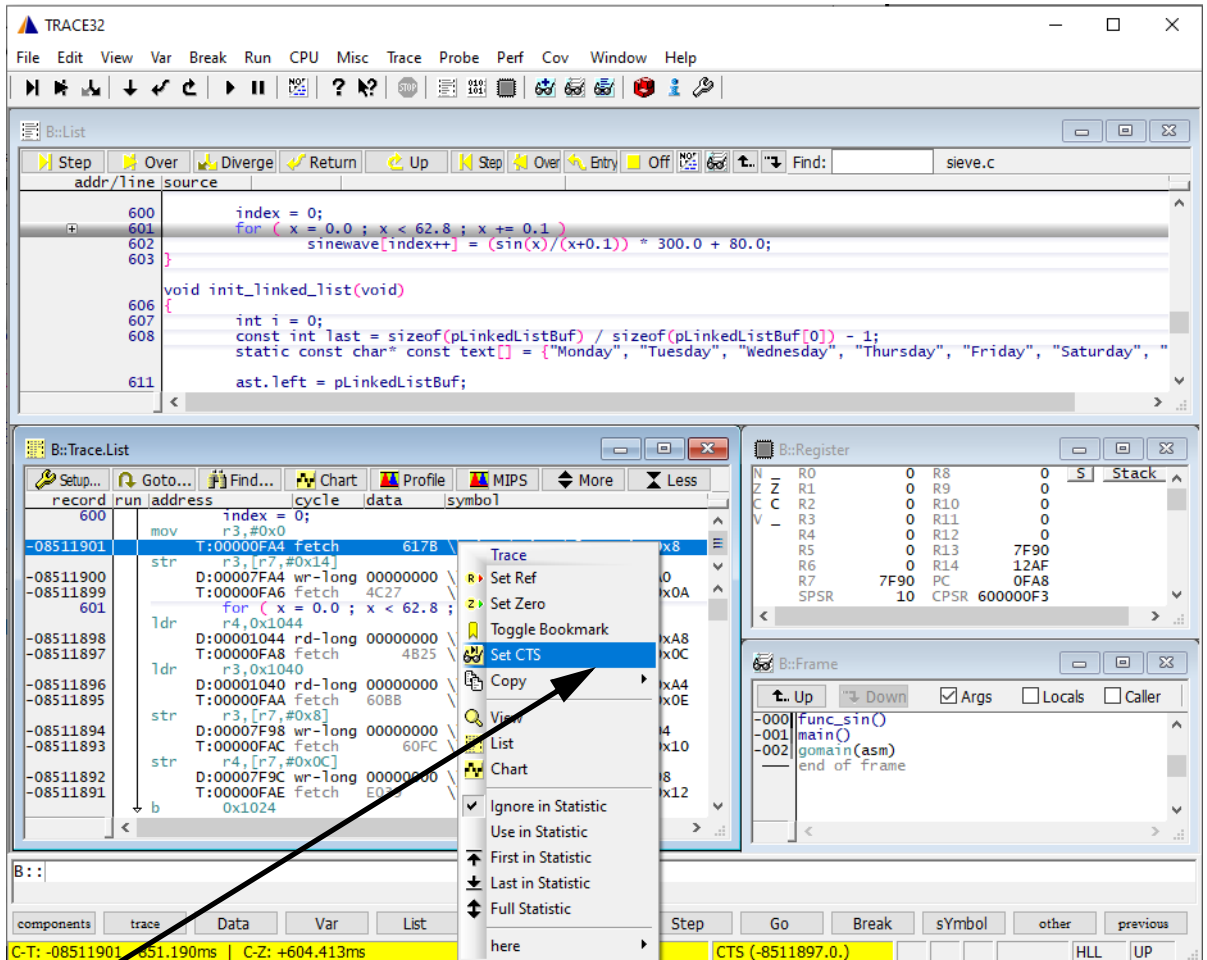

Select the start point for the trace-based debugging

After selecting the start point for the trace-based debugging TRACE32 does the following:

- The TRACE32 screen displays the context of the processor as it was when the selected start point was recorded to the trace buffer (e.g. CPU registers, source listing, variables etc.).
- The yellow CTS field in the state line indicates that the TRACE32 screen no longer displays the current state of the CPU.
- All run-time control buttons in the **List** window are **yellow**, to indicate that trace-based debugging is enabled.

If trace-based debugging is on, you can use all run-time control commands to re-run the information sampled to the trace buffer on the TRACE32 screen (e.g. **Step.single**, **Step.Back**, **Go.Return**, **Var.Step.Till** etc.).

Trace-based debugging can be switched off by either using the **Off** button in the **List** window or by entering **CTS.OFF** into the command line.

## Full High-Level Language Trace Display

---

If the complete program and data flow until the stop of the program execution is sampled to the trace buffer TRACE32 can display a full High-Level Language trace containing also register and stack variables. See the command **CTS.List**.

## Reconstruction of Trace Gaps (TRACE32-ICD)

---

**CTS.List** can also be used to reconstruct trace information:

- trace information lost through an overload of the trace port can be reconstructed in most cases.
- if only read cycles are sampled to prevent an overload of the trace port, CTS can reconstruct all write cycles.


Format:

CTS.CACHE

TRACE32 allows to perform a cache analysis using CTS technology, i.e. based on the program execution captured in a trace recording.

The cache analysis requires detailed knowledge of the structure of the CPU's cache. For most CPUs TRACE32 is aware of the cache structure.

To check if TRACE32 has the correct information for the cache structure of your CPU, open the **CTS.CACHE.state** window. To define the cache structure for TRACE32, use the TRACE32 command line or adjust the settings in the **CTS.CACHE.state** window.

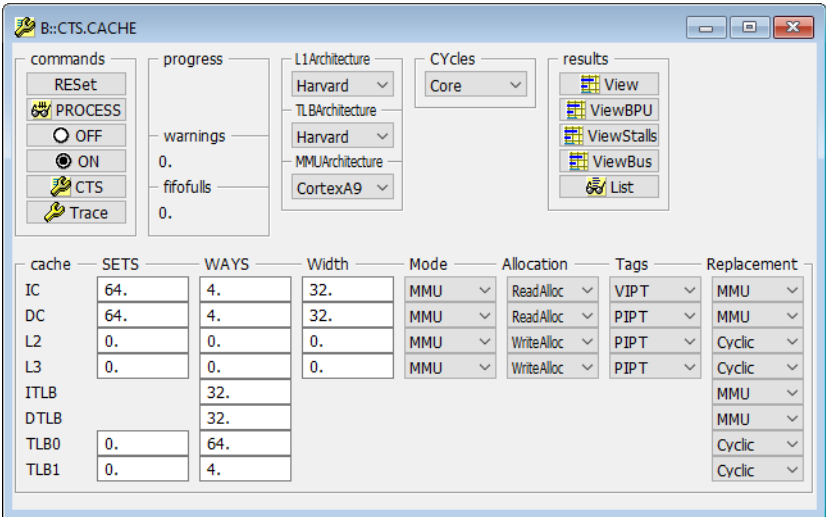

After **CTS** is switched to **ON** and **CTS.Mode CACHE** is selected, the contents of the caches and TLBs can be reconstructed. The cache analysis can be used for the following tasks:

- To support you to improve the cache hit rate by changing code and data locations
- To verify the cache hit rates after code changes
- To identify candidates for TCMs (tightly coupled memories) or faster memories
- To support you to find performance or bus bottlenecks
- To support you to improve the system performance and to reduce the power consumption
- To support you to try and verify different cache strategies
- To support you to identify optimum cache configuration and sizes for new silicons

The command group **CTS.CACHE** provides also the following advanced performance analysis features:

- Analysis of the branch prediction unit
- Analysis of the external bus interface
- Analysis of idle/stall operations

Even if these commands analyze different aspects of a microcontroller they are summarized here.

**See also**

---

- |   |  |
|---|--|
| ■ <a href="#">CTS.CACHE.Allocation</a>      | ■ <a href="#">CTS.CACHE.CYcles</a>         |
| ■ <a href="#">CTS.CACHE.DefineBus</a>       | ■ <a href="#">CTS.CACHE.L1Architecture</a> |
| ■ <a href="#">CTS.CACHE.LFSR</a>            | ■ <a href="#">CTS.CACHE.ListAddress</a>    |
| ■ <a href="#">CTS.CACHE.ListFunc</a>        | ■ <a href="#">CTS.CACHE.ListLine</a>       |
| ■ <a href="#">CTS.CACHE.ListModules</a>     | ■ <a href="#">CTS.CACHE.ListRequests</a>   |
| ■ <a href="#">CTS.CACHE.ListSet</a>         | ■ <a href="#">CTS.CACHE.ListVar</a>        |
| ■ <a href="#">CTS.CACHE.MMUArchitecture</a> | ■ <a href="#">CTS.CACHE.Mode</a>           |
| ■ <a href="#">CTS.CACHE.Replacement</a>     | ■ <a href="#">CTS.CACHE.RESet</a>          |
| ■ <a href="#">CTS.CACHE.SETS</a>            | ■ <a href="#">CTS.CACHE.Sort</a>           |
| ■ <a href="#">CTS.CACHE.state</a>           | ■ <a href="#">CTS.CACHE.Tags</a>           |
| ■ <a href="#">CTS.CACHE.TLBArchitecture</a> | ■ <a href="#">CTS.CACHE.View</a>           |
| ■ <a href="#">CTS.CACHE.ViewBPU</a>         | ■ <a href="#">CTS.CACHE.ViewBus</a>        |
| ■ <a href="#">CTS.CACHE.ViewStalls</a>      | ■ <a href="#">CTS.CACHE.WAYS</a>           |
| ■ <a href="#">CTS.CACHE.Width</a>           | ■ <a href="#">CTS</a>                      |
| ■ <a href="#">CTS.PROfileChart.CACHE</a>    | ■ <a href="#">CTS.state</a>                |
- ▲ ['Release Information' in 'Legacy Release History'](#)



Format:	<b>CTS.CACHE.Allocation</b> <i>&lt;cache&gt;</i> <b>ReadAlloc</b>   <b>WriteAlloc</b>
<i>&lt;cache&gt;</i> :	<b>IC</b> <b>DC</b> <b>L2</b> <b>L3</b>

The command **CTS.CACHE.Allocation** describes how the CPU deals with a cache miss on a data store/write access.

- ReadAlloc**

The data from a memory address is only loaded to the cache on read/load accesses.
- WriteAlloc**

The data from a memory address is loaded to the cache on a store/write access and the new data is written in the cache line. Please note that this also depends on the cache mode (write-through or copy-back).

```
CTS.CACHE.Allocation IC ReadAlloc      ; the instruction cache is a
                                       ; read allocate cache
```

See also

- [CTS.CACHE](#)
- [CTS.CACHE.state](#)

Format:	<b>CTS.CACHE.CYcle Core   Bus   NonSequential</b>
---------	---

Defines which method is used to count the cache hit/cache miss rate.

<b>Core</b>	The hit or miss counter is incremented on every core cycle.
<b>Bus</b>	The hit or miss counter is incremented on every bus cycle.
<b>NonSequential</b>	The hit or miss counter is only incremented if the CPU accesses a new cache line or performs a non-sequential access.

See also

- [CTS.CACHE](#)
- [CTS.CACHE.state](#)

CTS.CACHE.DefineBus

Define bus interface

Format:	<b>CTS.CACHE.DefineBus</b> <i>&lt;bus&gt;</i> <i>&lt;range&gt;</i> <i>&lt;bus_type&gt;</i> <i>&lt;frequency&gt;</i> <i>&lt;unknown&gt;</i> <i>&lt;read&gt;</i> <i>&lt;readreq&gt;</i> <i>&lt;readline&gt;</i> <i>&lt;write&gt;</i> <i>&lt;writeseq&gt;</i> <i>&lt;writeline&gt;</i> <i>&lt;writehalf&gt;</i>
<i>&lt;bus&gt;</i> :	<b>BUS0</b> <b>BUS1</b> <b>BUS2</b> <b>BUS3</b>
<i>&lt;bus_type&gt;</i> :	<b>SIMPLE32</b> <b>SIMPLE32I</b> <b>SIMPLE32D</b> <b>SIMPLE64</b> <b>SIMPLE64I</b> <b>SIMPLE64D</b>

Defines the bus interface that is the base for the analysis of the bus utilization by the command **CTS.CACHE.ViewBus**.

SIMPLE indicates that the number of clock cycles required by each type of memory access can be directly given.

<code>&lt;range&gt;</code>	Memory range addressed by the bus. The physical address has to be specified (memory class A:)
<code>&lt;frequency&gt;</code>	Bus frequency.
<code>&lt;unknown&gt;</code>	Average number of clock cycles required by a memory access that is categorized as unknown by the cache analysis.
<code>&lt;read&gt;</code>	Number of clock cycles required by a memory read access.
<code>&lt;readseq&gt;</code>	Number of clock cycles required by a subsequent memory read access (e.g. burst access).
<code>&lt;readline&gt;</code>	Number of clock cycles required by a cache line fill.
<code>&lt;write&gt;</code>	Number of clock cycles required by a memory write access.
<code>&lt;writeseq&gt;</code>	Number of clock cycles required by a subsequent memory write access (e.g. burst access).
<code>&lt;writeline&gt;</code>	Number of clock cycles required to write the contents of a cache line back to memory (copy back).
<code>&lt;writehalf&gt;</code>	Number of clock cycles required to write the contents of half a cache line back to memory (copy back).

```
CTS.CACHE.DefineBus BUS0 A:0++0xffffffff SIMPLE64 100.MHz
    1. 1. 1. 4. 1. 1. 4. 2.

CTS.CACHE.DefineBus BUS1 A:0x80000000++0x1fffffff SIMPLE32 100.MHz
    5. 8. 1. 6. 7. 1. 8. 4.
```

#### See also

■ [CTS.CACHE](#)      ■ [CTS.CACHE.state](#)

Format:	<b>CTS.CACHE.L1Architecture Harvard   Unified   UnifiedSplit</b>
---------	--

Defines the CACHE structure. This command defines the architecture of the level 1 cache.

<b>Harvard</b>	The L1 cache has Harvard architecture, which means that there is an instruction cache and a data cache available.
<b>Unified</b>	The L1 cache is a unified cache, which means that the same cache is used for instruction fetches and data loads/stores.
<b>UnifiedSplit</b>	The L1 cache is a unified cache, which means that the same cache is used for instruction fetches and data loads/stores. TRACE32 splits however the unified cache in an instruction and data cache for the cache analysis. The splitting is based on the cycle type (e.g. read, write, ptrace, exec).

See also

- [CTS.CACHE](#)
- [CTS.CACHE.state](#)

CTS.CACHE.LFSR

Linear-feedback shift register for random generator

Format:	<b>CTS.CACHE.LFSR IC   DC   L2   L3 &lt;lfsr&gt;</b>
---------	--


Set the start value of the linear-feedback shift register for random replacement strategy.

See also

- [CTS.CACHE](#)
- [CTS.CACHE.state](#)

Format: **CTS.CACHE.ListAddress IC | DC | L2 | L3 <range>**

Performs a cache analysis based on addresses.

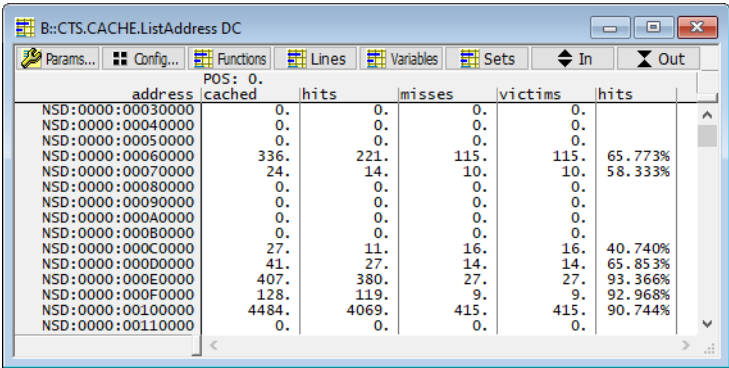

The screenshot shows a command window titled "B::CTS.CACHE.ListAddress DC". It displays a table with the following columns: address, POS: 0., cached, hits, misses, victims, and hits. The data is as follows:

address	POS: 0.	cached	hits	misses	victims	hits
NSD:0000:00030000	0.	0.	0.	0.	0.	
NSD:0000:00040000	0.	0.	0.	0.	0.	
NSD:0000:00050000	0.	0.	0.	0.	0.	
NSD:0000:00060000	336.	221.	115.	115.	115.	65.773%
NSD:0000:00070000	24.	14.	10.	10.	10.	58.333%
NSD:0000:00080000	0.	0.	0.	0.	0.	
NSD:0000:00090000	0.	0.	0.	0.	0.	
NSD:0000:000A0000	0.	0.	0.	0.	0.	
NSD:0000:000B0000	0.	0.	0.	0.	0.	
NSD:0000:000C0000	27.	11.	16.	16.	16.	40.740%
NSD:0000:000D0000	41.	27.	14.	14.	14.	65.853%
NSD:0000:000E0000	407.	380.	27.	27.	27.	93.366%
NSD:0000:000F0000	128.	119.	9.	9.	9.	92.968%
NSD:0000:00100000	4484.	4069.	415.	415.	415.	90.744%
NSD:0000:00110000	0.	0.	0.	0.	0.	

cached	Number of accesses to cached memory.
hits	Number of cache hits. (percentage based on all cached accesses)
misses	Number of cache misses. (percentage based on all cached accesses)
victims	Number of cache lines that were thrown out of the cache after a cache miss occurred.


CTS.CACHE.ListAddress IC 0x8000--0x12000

See also

- CTS.CACHE
- CTS.CACHE.state

Format: CTS.CACHE.ListFunc IC | DC | L2 | L3 [<range> | <address>]

Performs a function-based cache analysis.

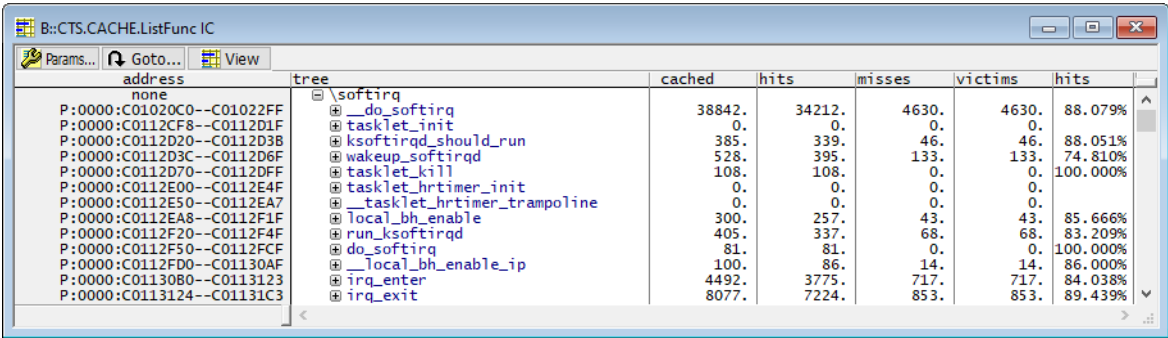

address	tree	cached	hits	misses	victims	hits
none	\softirq					
P:0000:C01020C0--C01022FF	do_softirq	38842.	34212.	4630.	4630.	88.079%
P:0000:C0112CF8--C0112D1F	tasklet_init	0.	0.	0.	0.	
P:0000:C0112D20--C0112D3B	ksoftirqd_should_run	385.	339.	46.	46.	88.051%
P:0000:C0112D3C--C0112D6F	wakeup_softirqd	528.	395.	133.	133.	74.810%
P:0000:C0112D70--C0112DFF	tasklet_kill	108.	108.	0.	0.	100.000%
P:0000:C0112E00--C0112E4F	tasklet_hrtimer_init	0.	0.	0.	0.	
P:0000:C0112E50--C0112EA7	tasklet_hrtimer_trampoline	0.	0.	0.	0.	
P:0000:C0112EA8--C0112F1F	local_bh_enable	300.	257.	43.	43.	85.666%
P:0000:C0112F20--C0112F4F	run_ksoftirqd	405.	337.	68.	68.	83.209%
P:0000:C0112F50--C0112FCF	do_softirq	81.	81.	0.	0.	100.000%
P:0000:C0112FD0--C01130AF	local_bh_enable_ip	100.	86.	14.	14.	86.000%
P:0000:C01130B0--C0113123	irq_enter	4492.	3775.	717.	717.	84.038%
P:0000:C0113124--C01131C3	irq_exit	8077.	7224.	853.	853.	89.439%

CTS.CACHE.ListFunc IC 8000++0fff


; perform a function based cache  
; cache analysis for the specified  
; address range

See also

- CTS.CACHE
- CTS.CACHE.state

Format: **CTS.CACHE.ListLine IC | DC | L2 | L3** [*<range>* | *<address>*]

Performs an HLL-line-based cache analysis.

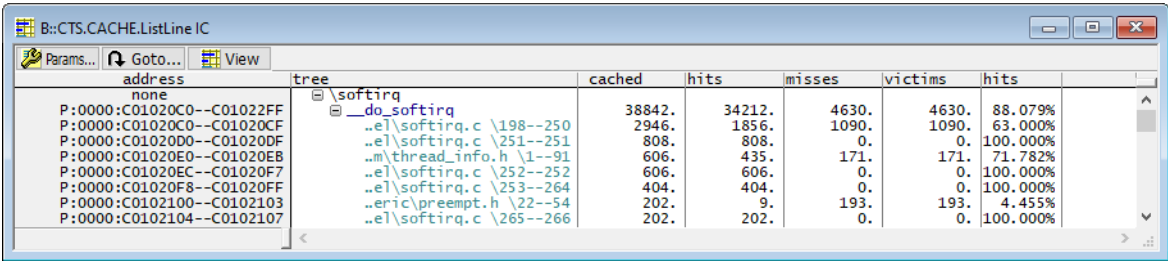


CTS.CACHE.ListLine IC dosomethingbad

See also

- CTS.CACHE
- CTS.CACHE.state

Format: **CTS.CACHE.ListModules IC | DC | L2 | L3** [*<range>* | *<address>*]

Performs a module-based cache analysis.

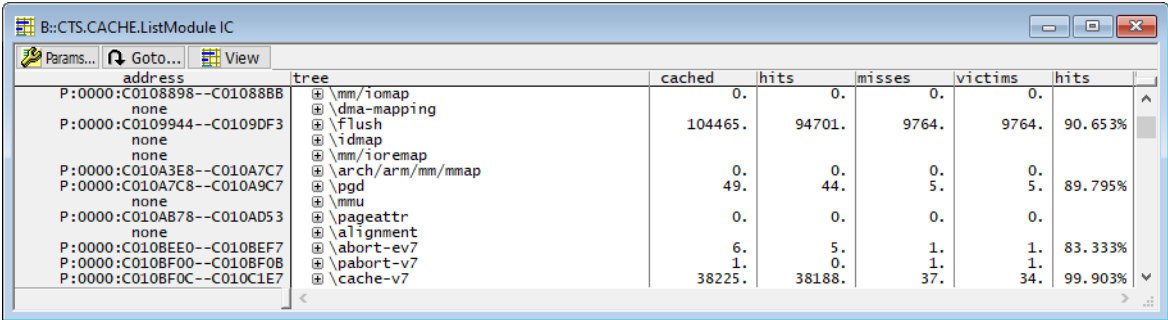


See also

- CTS.CACHE
- CTS.CACHE.state

Format: **CTS.CACHE.ListRequests IC | DC | L2 | L3 <address>**

Display which addresses compete for the same cache line.

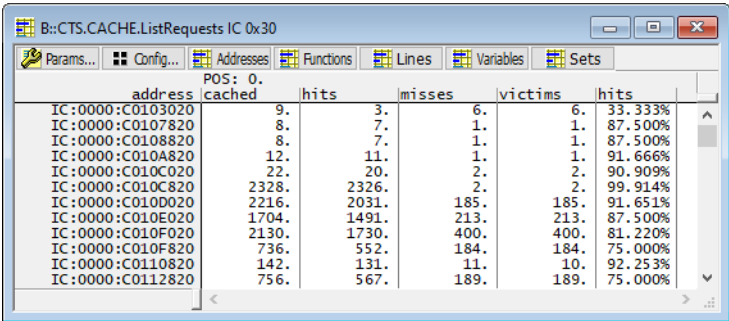

address	cached	hits	misses	victims	hits
IC:0000:C0103020	9.	3.	6.	6.	33.333%
IC:0000:C0107820	8.	7.	1.	1.	87.500%
IC:0000:C0108820	8.	7.	1.	1.	87.500%
IC:0000:C010A820	12.	11.	1.	1.	91.666%
IC:0000:C010C020	22.	20.	2.	2.	90.909%
IC:0000:C010C820	2328.	2326.	2.	2.	99.914%
IC:0000:C010D020	2216.	2031.	185.	185.	91.651%
IC:0000:C010E020	1704.	1491.	213.	213.	87.500%
IC:0000:C010F020	2130.	1730.	400.	400.	81.220%
IC:0000:C010F820	736.	552.	184.	184.	75.000%
IC:0000:C0110820	142.	131.	11.	10.	92.253%
IC:0000:C0112820	756.	567.	189.	189.	75.000%

CTS.CACHE.ListRequests IC 0x30 ; Display which addresses compete for  
; the cache line 0x30 of the instruction  
; cache


See also

- CTS.CACHE
- CTS.CACHE.state



Format: **CTS.CACHE.ListSet IC | DC | L2 | L3**

Performs a cache analysis based on cache sets.

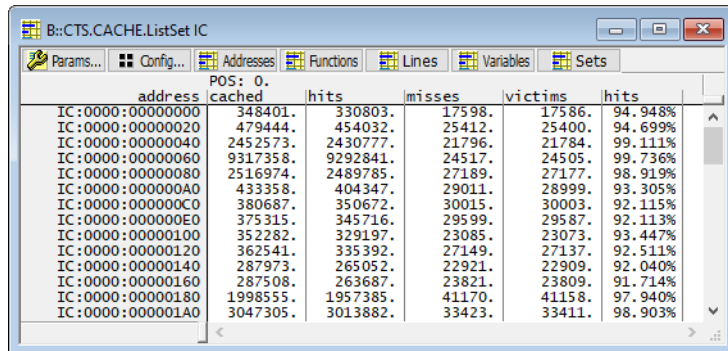

address	cached	hits	misses	victims	hits
IC:0000:00000000	348401.	330803.	17598.	17586.	94.948%
IC:0000:00000020	479444.	454032.	25412.	25400.	94.699%
IC:0000:00000040	2452573.	2430777.	21796.	21784.	99.111%
IC:0000:00000060	9317358.	9292841.	24517.	24505.	99.736%
IC:0000:00000080	2516974.	2489785.	27189.	27177.	98.919%
IC:0000:000000A0	433358.	404347.	29011.	28999.	93.305%
IC:0000:000000C0	380687.	350672.	30015.	30003.	92.115%
IC:0000:000000E0	375315.	345716.	29599.	29587.	92.113%
IC:0000:00000100	352282.	329197.	23085.	23073.	93.447%
IC:0000:00000120	362541.	335392.	27149.	27137.	92.511%
IC:0000:00000140	287973.	265052.	22921.	22909.	92.040%
IC:0000:00000160	287508.	263687.	23821.	23809.	91.714%
IC:0000:00000180	1998555.	1957385.	41170.	41158.	97.940%
IC:0000:000001A0	3047305.	3013882.	33423.	33411.	98.903%

See also


■ [CTS.CACHE](#) ■ [CTS.CACHE.state](#)

## CTS.CACHE.ListVar

## Variable based cache analysis

Format: **CTS.CACHE.ListVar IC | DC | L2 | L3 [<range> | <address>]**

Performs a cache analysis based on variables.

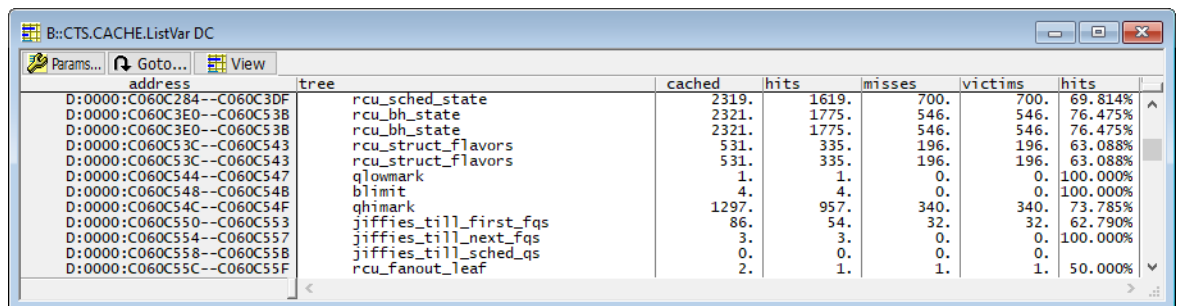

address	tree	cached	hits	misses	victims	hits
D:0000:C060C284--C060C3DF	rcu_sched_state	2319.	1619.	700.	700.	69.814%
D:0000:C060C3E0--C060C53B	rcu_bh_state	2321.	1775.	546.	546.	76.475%
D:0000:C060C3E0--C060C53B	rcu_bh_state	2321.	1775.	546.	546.	76.475%
D:0000:C060C53C--C060C543	rcu_struct_flavors	531.	335.	196.	196.	63.088%
D:0000:C060C53C--C060C543	rcu_struct_flavors	531.	335.	196.	196.	63.088%
D:0000:C060C544--C060C547	qlowmark	1.	1.	0.	0.	100.000%
D:0000:C060C548--C060C54B	blimit	4.	4.	0.	0.	100.000%
D:0000:C060C54C--C060C54F	ghimark	1297.	957.	340.	340.	73.785%
D:0000:C060C550--C060C553	jiffies_till_first_fqs	86.	54.	32.	32.	62.790%
D:0000:C060C554--C060C557	jiffies_till_next_fqs	3.	3.	0.	0.	100.000%
D:0000:C060C558--C060C55B	jiffies_till_sched_qs	0.	0.	0.	0.	100.000%
D:0000:C060C55C--C060C55F	rcu_fanout_leaf	2.	1.	1.	1.	50.000%

See also

■ [CTS.CACHE](#) ■ [CTS.CACHE.state](#)

Format:	CTS.CACHE.MMUArchitecture <control>
<control>:	<div>NONE ARM920T   ARM922T   ARM925T   ARM926EJ   ARM946E ARM1136J   ARM1156T2   ARM1176JZ   ARM11MPCORE CortexA5   CortexA7   CortexA8   CortexA9 CortexR4   CortexR5   CortexR7   CortexR8 MXPLMEM SCORPION E200MMU   E200MPU   E200FLASH   E200FLASH2 M340 MCF5272 SC140E NIOS2E   NIOS2S   NIOS2F TC1766   TC1796</div>

If the MMU architecture is set, the cache analysis takes **all manipulations on the cache control registers** into account for the cache analysis:

- Cache flushes
- Switch-on and switch-off of the caches
- Cache locks

If **CTS.CACHE.MMUArchitecture** is set to **NONE**, the manipulations on the cache control registers are not taken into account for the cache analysis.

See also

- [CTS.CACHE](#)
- [CTS.CACHE.state](#)

Format:	CTS.CACHE.Mode IC   DC   L2   L3 <mode>
<mode>:	CopyBack WriteThrough MMU

This command defines the strategy used for the memory coherency for each cache.

CopyBack	Copy back strategy guarantees memory coherency. When a cache hit occurred for a data store/write, the cache contents is updated and the corresponding cache line is marked as dirty. The data value is copied back to memory when the contents of the cache line is evicted.
WriteThrough	Write Through strategy guarantees memory coherency. When a cache hit occurs for a data store/write, the cache contents is updated and the data is also stored/written to memory.
MMU	The strategy for memory coherency is taken from the MMU.

See also

- [CTS.CACHE](#)
- [CTS.CACHE.state](#)

Format:	<b>CTS.CACHE.Replacement</b> <cache> <replace>
<cache>:	<b>IC   DC   L2   L3   ITLB   DTLB   TLB0   TLB1</b>
<replace>:	<b>Cyclic</b> <b>FreeCyclic</b> <b>PseudoCyclic</b> <b>FreePseudoCyclic</b> <b>Random</b> <b>FreeRandom</b> <b>LRU</b> <b>MMU</b>

This command defines the replacement strategy for each cache.

<b>Cyclic</b>	Cyclic (round-robin) replacement strategy is used. One round robin counter for each cache set.
<b>FreeCyclic</b>	Cyclic (round-robin) replacement strategy is used, but if an empty cache line is found it is filled first.
<b>PseudoCyclic</b>	Cyclic (round-robin) replacement strategy is used. But there is only one round robin counter for all cache sets.
<b>FreePseudoCyclic</b>	Cyclic (round-robin) replacement strategy is used <ul style="list-style-type: none"><li>but if an empty cache line is found it is filled first</li><li>but there is only one round robin counter for all cache sets</li></ul>
<b>Random</b>	Random replacement strategy is used.
<b>FreeRandom</b>	Random replacement strategy is used, but if an empty cache line is found it is filled first.
<b>LRU</b>	Last recently used replacement strategy is used.
<b>MMU</b>	The replacement strategy is defined by the CPU. Please use <b>CTS.CACHE.Replacement MMU</b> if your CPU uses a not listed replacement strategy.

See also

- [CTS.CACHE](#)
- [CTS.CACHE.state](#)

Format: CTS.CACHE.RESet

Resets the settings of the **CTS.CACHE** window.

See also

- CTS.CACHE
- CTS.CACHE.state

CTS.CACHE.SETS

Define the number of cache sets

Format: CTS.CACHE.SETS <cache> <sets>

<cache>: IC | DC | L2 | L3 | ITLB | DTLB | TLB0 | TLB1

This command defines the number of cache sets for each cache.

```
CTS.CACHE.SETS IC 4. ; The instruction CACHE has 4 sets
CTS.CACHE.SETS DC 4. ; The data CACHE has 4 sets
```

See also

- CTS.CACHE
- CTS.CACHE.state

CTS.CACHE.Sort

Define sorting for all list commands

Format: CTS.CACHE.Sort OFF | Address | Victims


Defines the sorting for all list commands.

See also

- CTS.CACHE
- CTS.CACHE.state

Format: CTS.CACHE.state

Displays the cache structure of your CPU in the **CTS.CACHE.state** window. For background information, see [CTS.CACHE](#).

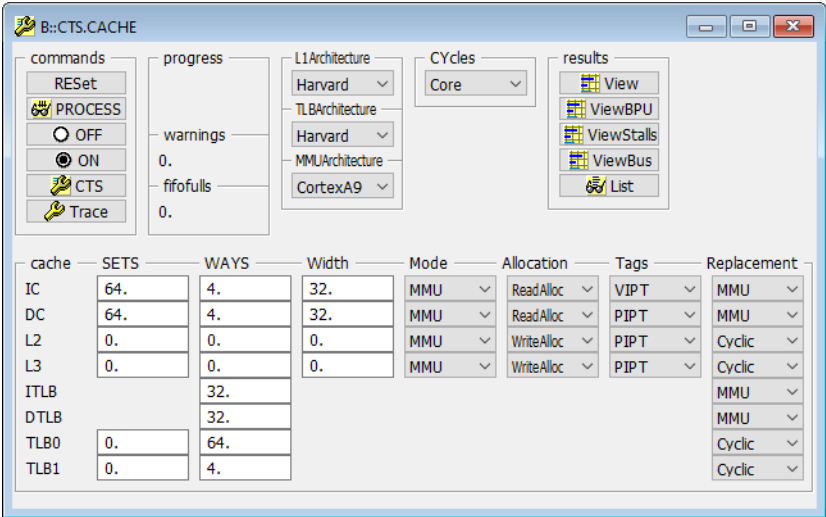

See also

- CTS.CACHE
  - CTS.CACHE.Cycles
  - CTS.CACHE.L1Architecture
  - CTS.CACHE.ListAddress
  - CTS.CACHE.ListLine
  - CTS.CACHE.ListRequests
  - CTS.CACHE.ListVar
  - CTS.CACHE.Mode
  - CTS.CACHE.RESet
  - CTS.CACHE.Sort
  - CTS.CACHE.TLBArchitecture
  - CTS.CACHE.ViewBPU
  - CTS.CACHE.ViewStalls
  - CTS.CACHE.Width
- CTS.CACHE.Allocation
  - CTS.CACHE.DefineBus
  - CTS.CACHE.LFSR
  - CTS.CACHE.ListFunc
  - CTS.CACHE.ListModules
  - CTS.CACHE.ListSet
  - CTS.CACHE.MMUArchitecture
  - CTS.CACHE.Replacement
  - CTS.CACHE.SETS
  - CTS.CACHE.Tags
  - CTS.CACHE.View
  - CTS.CACHE.ViewBus
  - CTS.CACHE.WAYS
  - CTS.state

Format:	CTS.CACHE.Tags IC   DC   L2   L3 <tag>
<tag>:	VIVT PIPT VIPT AVIVT

Defines the cache structure.

VIVT	Virtual Index, Virtual Tag The logical address is used as tag for a cache line.
PIPT	Physical Index, Physical Tag The physical address is used as tag for a cache line.
VIPT	Virtual Index, Physical Tag
AVIVT	Address Space ID + Virtual Index, Virtual Tag

See also

- [CTS.CACHE](#)
- [CTS.CACHE.state](#)

Format:	<b>CTS.CACHE.TLBArchitecture Harvard   Unified   UnifiedSplit</b>
---------	---

This command defines the architecture for the TLB cache.

<b>Harvard</b>	The TLB cache has Harvard architecture, that means there is an instruction TLB and a data TLB available.
<b>Unified</b>	The TLB cache is a unified cache, that means the same TLB is used for instruction fetches and data loads/stores.
<b>UnifiedSplit</b>	The TLB cache is a unified cache, that means the same TLB is used for instruction fetches and data loads/stores. But TRACE32 splits the unified cache in an instruction and data TLB for the cache analysis. The splitting is based on the cycles type (e.g. read/write/ptrace/exec). (not implemented yet)

See also


- [CTS.CACHE](#)
- [CTS.CACHE.state](#)



Format: CTS.CACHE.View

Displays the results for the cache analysis. **CTS.Mode CACHE** has to be selected before any calculation can be started. The calculation of the results for the cache analysis can be activated as follows:

- By using the command **CTS.PROCESS**. That way the complete trace contents is analyzed.
- By selecting a part of the trace contents e.g. a function. The starting point for the analysis is selected by setting a reference point (command **Analyzer.REF**) to the relevant trace record **[A]**. The endpoint for the analysis is selected by setting the CTS point (command **CTS.GOTO**) to the relevant trace record **[B]**.

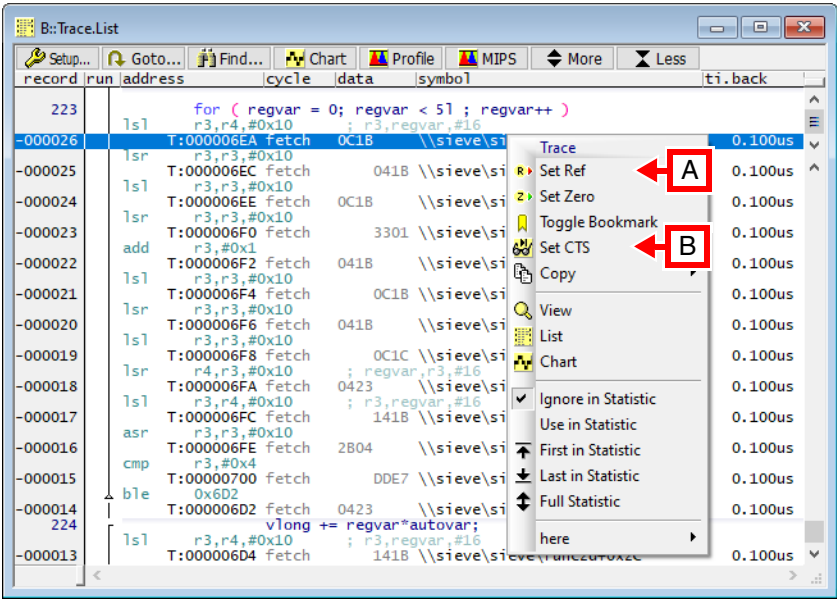


The result:

B::CTS.CACHE.view										
POS: 0.										
cache	unknown	cached	hits	misses	victims	flushes	copybacks	writethrus	nawrites	
IC	17067. 0.025%	67656992. 99.974%	65520568. 96.842%	2136424. 3.157%	2135656. 3.156%	512. <0.001%	0.	0.	0.	
DC	56259. 0.174%	21225619. 65.755%	19967356. 94.071%	1258263. 5.928%	1258263. 5.928%	0.	896065. 2.775%	0.	10993984. 34.058%	
L2										
L3										
ITLB	0.	67656992.	67646949. 99.985%	10043. 0.014%	0.	10039. 0.014%				
DTLB	2. <0.001%	32264648.	32252154. 99.961%	12494. 0.038%	0.	12481. 0.038%				
TLB0	2. 0.008%	22537.	22478. 99.738%	59. 0.261%	0.	8. 0.035%				
TLB1	0.	0.	0.	0.	0.	0.				

cache	copybacks	writethrus	nawrites	reads	writes	trashes
IC	0.	0.	0.	0.	0.	0.
DC	896065. 2.775%	0.	10993984. 34.058%	2970. 0.009%	715. 0.002%	0.
L2						
L3						
ITLB						
DTLB						
TLB0						
TLB1						

## Interpretation of the result:

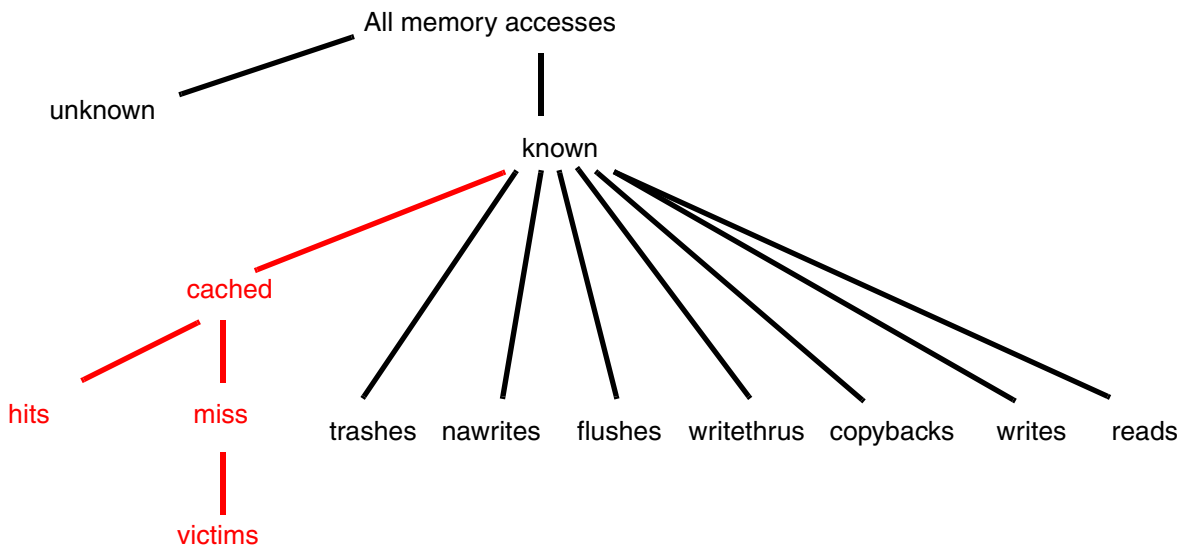

## Description of Buttons in the CTS.CACHE.View Window

[\[Back to Top\]](#)

<b>Setup</b>	Display a <b>Trace</b> configuration window.
<b>CTS</b>	Display <b>CTS</b> settings window.
<b>Params</b>	Display information about the cache structure ( <b>CTS.CACHE.state</b> ).
<b>Process</b>	Initiate calculation for cache analysis ( <b>CTS.PROCESS</b> ).
<b>List</b>	Display a <b>CTS</b> listing ( <b>CTS.List</b> ).
<b>BPU</b>	Display a statistic for branch prediction unit ( <b>CTS.CACHE.ViewBPU</b> ).
<b>Stalls</b>	Display a statistic for idles/stalls ( <b>CTS.CACHE.ViewStalls</b> ).
<b>Bus</b>	Display a statistic for bus utilization ( <b>CTS.CACHE.ViewBus</b> ).

## Description of Columns in the CTS.CACHE.View Window

[\[Back to Top\]](#)


<b>unknown</b>	All accesses for which TRACE32 has no information The cache analysis is based on the memory addresses recorded in the trace buffer. Before the first memory address is mapped to a specific cache line the contents of this cache line is unknown. Other reasons for unknown are: gaps in the trace recording, missing address information etc. (percentage is based on all memory accesses)
<b>cached</b>	Number of accesses to cached addresses (percentage is based on all memory accesses)
<b>hits</b>	Number of cache hits (percentage is based on all cached accesses)
<b>miss</b>	Number of cache misses (percentage is based on all cached accesses)
<b>victims</b>	Number of cache victims (percentage is based on all cached accesses)
<b>flushes</b>	Number of cache lines that were flushed (percentage is based on all memory accesses)
<b>copybacks</b>	Number of cache lines that were copied back to memory (percentage is based on all memory accesses)

<b>writethrus</b>	Number of cache lines that were written through to memory (percentage is based on all memory accesses)
<b>nawrites</b>	Writes in a read-allocated cache (percentage is based on all memory accesses)
<b>reads</b>	Number of not-cached reads (percentage is based on all memory accesses)
<b>writes</b>	Number of not-cached writes (percentage is based on all memory accesses)
<b>trashes</b>	Discarded accesses (ARM11 only) (percentage is based on all memory accesses)

See also

- [CTS.CACHE](#)
- [CTS.CACHE.state](#)

Format: CTS.CACHE.ViewBPU

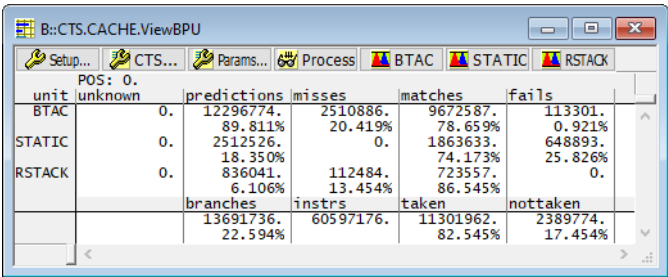

BTAC	Branch Target Address Cache / Branch Folding
STATIC	Static Branch Predictor
RSTACK	Return Stack

For details about the program flow prediction please refer to your processor manual.

instrs	Total number of instructions.
branches	Total number of branches.
taken	Number of taken branches.
nottaken	Number of not-taken branches.

predictions	Total number of branch predictions.
unknown	Since the contents of Branch Target Address Cache is unknown at the beginning of the analysis, the first <size_of_branch_target_address_cache> predictions are unknown.
misses	No entry was found in the Branch Target Address Cache for the branch source address.
hits	An entry for the branch source address was found in the Branch Target Address Cache and the prediction was correct.
fails	An entry for the branch source address was found in the Branch Target Address Cache, but the prediction failed.



See also

- CTS.CACHE
- CTS.CACHE.state

Format:

CTS.CACHE.ViewBus

Displays a detailed analysis of the bus utilization.

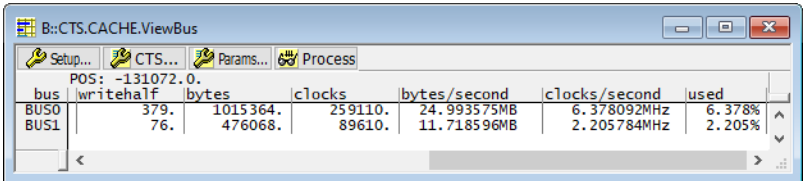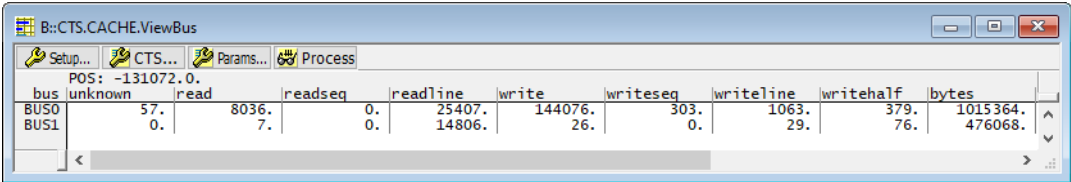


unknown	Number of clock cycles consumed by memory accesses that are categorized as unknown by the cache analysis
read	Number of clock cycles consumed by memory read accesses
readseq	Number of clock cycles consumed by subsequent memory read accesses (e.g. burst access)
readline	Number of clock cycles consumed by cache line fill operations
write	Number of clock cycles consumed by memory write accesses
writeseq	Number of clock cycles consumed by subsequent memory write accesses (e.g. burst access)
writeline	Number of clock cycles consumed by writing the contents of a cache line back to memory (copy back)
writehalf	Number of clock cycles consumed by writing the contents of half a cache line back to memory (copy back)
bytes	Number of bytes transferred via the external bus interface
clocks	Number of clock cycles the external bus was busy
bytes/s	Transmission rate
clocks/s	Transmission frequency
used	Bus load in percentage

See also

- CTS.CACHE
- CTS.CACHE.state

Format: CTS.CACHE.ViewStalls

Analyses over the measurement interval how much cycles/time was taken by idles/stalls and how much cycles/time the CPU was really working.

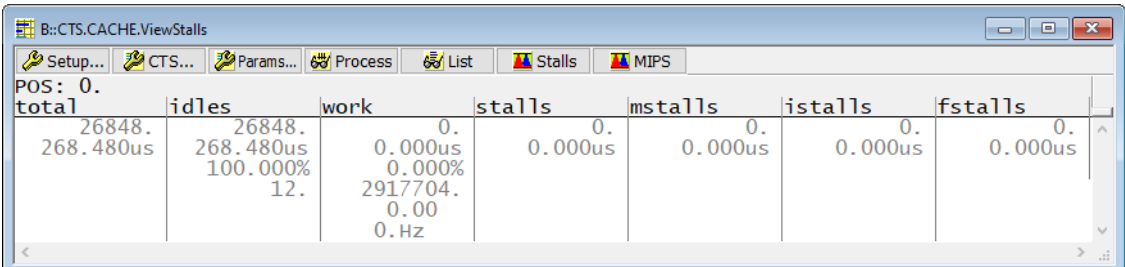

total	Number of analyzed clock cycles measurement time
idles	Number of idles cycles (the CPU is not executing instructions) time the CPU was in idle mode percentage of time/clocks the CPU was in idle mode number of time the CPU was in idle state The number of idles states is calculated as follows: <ul style="list-style-type: none"><li>number of times the CPU went in power-down or sleep mode (e.g. for the ARM architecture the number of times a Wait for Interrupt CP15 operation was performed)</li><li>number of times a single instruction last more the 1000. clock cycles</li></ul>
work	Number of cycles the processor was working time the CPU was working percentage of time the processor was working number of instructions that were executed by the processor
stalls	Number of stalls  time the CPU was stalled  percentage of time the CPU was stalled
mstalls	Number of memory stalls time taken by memory stalls percentage of time taken by memory stalls Memory stalls are caused by e.g. cache misses, TLB misses, accesses to slow memory ...

<b>istalls</b>	Number of interlock stalls time taken by interlock stalls percentage of time taken by interlock stalls Interlock stalls are caused by e.g. resource conflicts between instructions, data dependencies ...
<b>fstalls</b>	Number of fetch stalls time taken by fetch stalls percentage of time taken by fetch stalls Fetch stalls are caused by e.g. pipeline reload etc.

**See also**

---

■ [CTS.CACHE](#)                      ■ [CTS.CACHE.state](#)  
▲ ['Release Information' in 'Legacy Release History'](#)

CTS.CACHE.WAYS

Define number of cache ways

---

Format:

CTS.CACHE.WAYS <cache> <ways>

<cache>:

IC | DC | L2 | L3 | ITLB | DTLB | TLB0 | TLB1

This command defines the number of cache ways (blocks) for each cache.

```
CTS.CACHE.WAYS IC 4.           ; The instruction CACHE has 4 blocks
CTS.CACHE.WAYS DC 4.           ; The data CACHE has 4 blocks
```

**See also**

---

■ [CTS.CACHE](#)                      ■ [CTS.CACHE.state](#)



Format: CTS.CACHE.Width IC | DC | L2 | L3 <width>

This command define the width of a single cache line in bytes.

```
CTS.CACHE.Width IC 32.           ; A cache line for the instruction cache
                                ; is 32. byte
```

See also

- CTS.CACHE
- CTS.CACHE.state

CTS.CAPTURE

Copy real memory to the virtual memory for CTS

Format: CTS.CAPTURE

Copies “real” memory to the [TRACE32 virtual memory \(VM:\)](#) for all places where VM: is already mapped.

```
...
; Capture a snapshot of the system for the analysis.
CTS.CAPTURE
Go ; Start the analysis.
Break ; Stop the analysis.
...
```

See also

- CTS
- CTS.state
- ▲ 'Release Information' in 'Legacy Release History'

Format: CTS.Chart.ChildTREE <address>

Show call tree and run-time of all functions called by the specified functions based on the CTS data. Gaps in the trace caused by FIFO overflows are filled by CTS when SmartTrace is enabled (CTS.SmartTrace ON).

Refer to <trace>.Chart.ChildTREE for a description of the parameters and options.

See also

■ <trace>.Chart.ChildTREE

CTS.Chart.Func

Function activity chart

Format: CTS.Chart.Func [<trace\_area>] [/<option>]

Displays the time spent in different functions as chart based on the CTS data. Gaps in the trace caused by FIFO overflows are filled by CTS when SmartTrace is enabled (CTS.SmartTrace ON).

Refer to <trace>.Chart.Func for a description of the parameters and options.

See also

■ <trace>.Chart.Func

CTS.Chart.INTERRUPT

Display interrupt chart

Format: CTS.Chart.INTERRUPT [<trace\_area>] [/<option>]

Displays the time spent in different interrupts as time chart based on the CTS data. Gaps in the trace caused by FIFO overflows are filled by CTS when SmartTrace is enabled (CTS.SmartTrace ON).

Refer to <trace>.Chart.INTERRUPT for a description of the parameters and options.

See also

■ <trace>.Chart.INTERRUPT

Format: CTS.Chart.INTERRUPTTREE [*<trace\_area>*] [*/<option>*]

Displays the interrupt nesting as time chart based on the CTS data. Gaps in the trace caused by FIFO overflows are filled by CTS when SmartTrace is enabled (CTS.SmartTrace ON).

Refer to <Trace>.Chart.INTERRUPTTREE for a description of the parameters and options.

See also

- <trace>.Chart.INTERRUPTTREE

CTS.Chart.Nesting

Show function nesting at cursor position

Format: <trace>.Chart.Nesting [*<trace\_area>*] [*/<option>*]

Shows the function call stack as a time chart based on the CTS data. Gaps in the trace caused by FIFO overflows are filled by CTS when SmartTrace is enabled (CTS.SmartTrace ON).

Refer to <trace>.Chart.Nesting for a description of the parameters and options.

See also

- <trace>.Chart.Nesting

CTS.Chart.RUNNABLE

Runnable activity chart

Format: <trace>.Chart.RUNNABLE [*<trace\_area>*] [*/<option>*]

The time spent in different AUTOSAR Runnables is displayed graphically. Gaps in the trace caused by FIFO overflows are filled by CTS when SmartTrace is enabled (CTS.SmartTrace ON).

This feature is only available if an OSEK/ORTI system is used and if the OS Awareness is configured with the TASK.ORTI command. Please refer to “OS Awareness Manual NORTi” (rtos\_norti.pdf) for more information.

Refer to [<trace>.Chart.Nesting](#) for a description of the parameters and options.

See also

■ [<trace>.Chart.RUNNABLE](#)

CTS.Chart.sYmbol

Execution time at different symbols as chart

Format:

CTS.Chart.sYmbol [*<trace\_area>*] [*/<option>*]

Displays the distribution of program execution time at different symbols as a time chart based on the CTS data. Gaps in the trace caused by FIFO overflows are filled by CTS when SmartTrace is enabled ([CTS.SmartTrace ON](#)).

Refer to [<trace>.Chart.sYmbol](#) for a description of the parameters and options.

See also

■ [CTS](#)      ■ [CTS.PROfileChart](#)      ■ [CTS.state](#)      ■ [<trace>.Chart.sYmbol](#)

CTS.Chart.TASK

Task activity chart

Format:

<trace>.Chart.TASK [*<trace\_area>*] [*/<option>*]

Displays the time spent in different tasks based on the CTS data. Gaps in the trace caused by FIFO overflows are filled by CTS when SmartTrace is enabled ([CTS.SmartTrace ON](#)). This feature is only available if TRACE32 has been set for OS-aware debugging.

Refer to [<trace>.Chart.TASK](#) for a description of the parameters and options.

See also

■ [<trace>.Chart.TASK](#)

Format:	<b>CTS.Chart.TASKINFO</b> [ <i>&lt;trace_area&gt;</i> ] [/<option>]
---------	---

Displays a graphical chart based on the CTS data for special messages written to the context ID register (ETM trace).

Refer to [<trace>.Chart.TASKINFO](#) for a description of the parameters and options.

See also

---

■ [<trace>.Chart.TASKINFO](#)

CTS.Chart.TASKINTR

Display ISR2 time chart (ORTI)

Format:	<b>CTS.Chart.TASKINTR</b> [ <i>&lt;trace_area&gt;</i> ] [/<option>]
---------	---

Displays an ORTI based ISR2 time chart based on the CTS data. Gaps in the trace caused by FIFO overflows are filled by CTS when SmartTrace is enabled ([CTS.SmartTrace ON](#)). This feature can only be used if ISR2 can be traced based on the information provided by the ORTI file. Please refer to “[OS Awareness Manual NORTi](#)” (rtos\_norti.pdf) for more information.

Refer to [<trace>.Chart.TASKINTR](#) for a description of the parameters and options.

See also

---

■ [<trace>.Chart.TASKINTR](#)

CTS.Chart.TASKKernel

Display task time chart with kernel markers (ORTI)

Format:	<b>CTS.Chart.TASKKernel</b> [ <i>&lt;trace_area&gt;</i> ] [/<option>]
---------	---

Similar command to [<trace>.Chart.TASKKernel](#). The analysis is however based on the CTS data. Gaps in the trace caused by FIFO overflows are filled by CTS when SmartTrace is enabled ([CTS.SmartTrace ON](#)). This feature is only available if TRACE32 has been set for OS-aware debugging.

Refer to [<trace>.Chart.TASKKernel](#) for a description of the parameters and options.

#### See also

■ [<trace>.Chart.TASKKernel](#)

## CTS.Chart.TASKORINTERRUPT

### Task and interrupt activity chart

Format: `<trace>.Chart.TASKORINTERRUPT [<trace_area>] [/<option>]`

Displays the time spent in different tasks and interrupts based on the CTS data. Gaps in the trace caused by FIFO overflows are filled by CTS when SmartTrace is enabled ([CTS.SmartTrace ON](#)). This feature is only available if TRACE32 has been set for OS-aware debugging.

Refer to [<trace>.Chart.TASKORINTERRUPT](#) for a description of the parameters and options.

#### See also

■ [<trace>.Chart.TASKORINTERRUPT](#)

## CTS.Chart.TASKSRV

### Service routine run-time analysis

Format: `CTS.Chart.TASKSRV [<trace_area>] [/<option>]`

The time spent in OS service routines and different tasks is displayed. Gaps in the trace caused by FIFO overflows are filled by CTS when SmartTrace is enabled ([CTS.SmartTrace ON](#)). This feature is only available if an OSEK/ORTI system is used and if the OS Awareness is configured with the [TASK.ORTI](#) command. Please refer to “[OS Awareness Manual NORTi](#)” (rtos\_norti.pdf) for more information.

Refer to [<Trace>.Chart.TASKSRV](#) for a description of the parameters and options.

## CTS.Chart.TASKVSINTERRUPT

### Time chart of interrupted tasks

Format: `CTS.Chart.TASKVSINTERRUPT [<trace_area>] [/<option>]`

Shows a graphical representation of tasks that were interrupted by interrupt service routines based on the CTS data. Gaps in the trace caused by FIFO overflows are filled by CTS when SmartTrace is enabled ([CTS.SmartTrace ON](#)). This feature is only available if TRACE32 has been set for OS-aware debugging.

Refer to [<trace>.Chart.TASKVSINTERRUPT](#) for a description of the parameters and options.

See also

■ [<trace>.Chart.TASKVSINTERRUPT](#)

CTS.Chart.TASKVSINTR

Time chart of task-related interrupts

Format:

CTS.Chart.TASKVSINTR [*<trace\_area>*] [/<options> ...]

Displays a time-chart for task-related interrupt service routines based on the CTS data. Gaps in the trace caused by FIFO overflows are filled by CTS when SmartTrace is enabled ([CTS.SmartTrace ON](#)). This feature is only available if an OSEK/ORTI system is used and if the OS Awareness is configured with the [TASK.ORTI](#) command. Please refer to “[OS Awareness Manual NORTi](#)” (rtos\_norti.pdf) for more information.

Refer to [<trace>.Chart.TASKVSINTR](#) for a description of the parameters and options.

See also

■ [<trace>.Chart.TASKVSINTR](#)

CTS.Chart.TREE

Display function chart as tree view

Format:

CTS.Chart.TREE [*<trace\_area>*] [/<option>]

The result of this command shows a graphical chart tree of the function nesting based on the CTS data. Gaps in the trace caused by FIFO overflows are filled by CTS when SmartTrace is enabled ([CTS.SmartTrace ON](#)).

Refer to [<trace>.Chart.TREE](#) for a description of the parameters and options.

See also

■ [<trace>.Chart.TREE](#)

Format:	<b>CTS.EXPORT</b> <file> [<trace_area>] [/<option>]
<option>	<b>FILE   CORE   CACHE   BUS</b>

Exports the trace contents with CTS information for postprocessing by an external analysis tool. The command is similar to [<trace>.EXPORT](#).

<b>FILE</b>	Exports the trace contents loaded with <a href="#">&lt;trace&gt;.FILE</a> .
<b>CORE</b>	Exports core accesses.
<b>CACHE</b>	Exports cache accesses. This option is only available if <a href="#">CTS.Mode CACHE</a> has been selected.
<b>BUS</b>	Exports bus accesses. This option is only available if <a href="#">CTS.Mode CACHE</a> has been selected.

See also

- [CTS](#)

CTS.FixedControl

Execution time at different symbols as chart

Format:	<b>CTS.FixedControl</b> [ON   OFF]
---------	------------------------------------

Fixes control register values to current value. Only supported for PowerPC E200ZX.

See also

- [CTS](#)

CTS.GOTO

Select the specified record for CTS (absolute)

Format:	<b>CTS.GOTO</b> <record> [/FILE]
---------	----------------------------------

Selects the specified record for the trace based debugging. If CTS is OFF, CTS is switched to ON by this command.



This command can be used to set the starting point for trace-based debugging.

**FILE** Takes trace memory contents loaded by [<trace>.LOAD](#).

```
CTS.GOTO -123. ; Select record -123. for CTS
```

**See also**

---

■ [CTS](#)                      ■ [CTS.state](#)

## CTS.INCremental CTS displays intermediate results while processing

---

```
Format: CTS.INCremental [ON | OFF]
```

- ON** [CTS.List](#) displays intermediate results while TRACE32 is processing the trace contents.
- OFF** [CTS.List](#) displays the result after TRACE32 has completely processed the trace contents.

**See also**

---

■ [CTS](#)                      ■ [CTS.state](#)

## CTS.Init Restart CTS processing

---

```
Format: CTS.Init
```

- Restarting the CTS processing has effects:
- [CTS.List](#) is reprocessed.
  - The target context for trace-based debugging is re-processed.
  - The new settings of the CTS window take effect.


**See also**

---

■ [CTS](#)                      ■ [CTS.state](#)

Format:	<b>CTS.List</b> [<record>   <record_range>] [<items> ...] [/<options>]
<options>:	<b>FILE</b> <b>Track</b> <b>Mark</b> <item> <b>TASK</b> <task_magic>   <task_id>   <task_name> <other_generic_options>
<items>:	%<format> <b>DEfault</b>   <b>ALL</b>   <b>CPU</b>   <b>LINE</b>   <b>PORTS</b> <b>Run</b> <b>CYcle</b>   <b>Data</b> [.<subitem>]   <b>BDATA</b>   <b>List</b> [.<subitem>] <b>Address</b>   <b>BAddress</b>   <b>FAddress</b>   <b>sYmbol</b>   <b>sYmbolN</b>   <b>PAddress</b>   <b>PsYmbol</b>   <b>Var</b> <b>Time</b> [.<subitem>] <b>FUNC</b>   <b>FUNCRCR</b>   <b>FUNCVar</b>   <b>IGNORE</b> <b>LeVel</b>   <b>MARK</b> [.<marker>]   <b>FLAG</b> [.<flag_index>] <b>Trigger</b>   <b>Trigger.A</b>   <b>Trigger.B</b> <b>SPARE</b> <special_lines>
<format>:	<b>Ascii</b>   <b>BiNary</b>   <b>Decimal</b>   <b>Hex</b>   <b>Signed</b>   <b>Unsigned</b> <b>HighLow</b>   <b>Timing</b> <b>TimeAuto</b>   <b>TimeFixed</b> <b>LEN</b> <size>

<options>	For a detailed description of all other parameters and options, refer to the <a href="#">&lt;trace&gt;.List</a> command.
<b>TASK</b> <task_magic>, etc.	Filters the <b>CTS.List</b> window by the specified task. See also <a href="#">“What to know about the Task Parameters”</a> (general_ref_t.pdf).

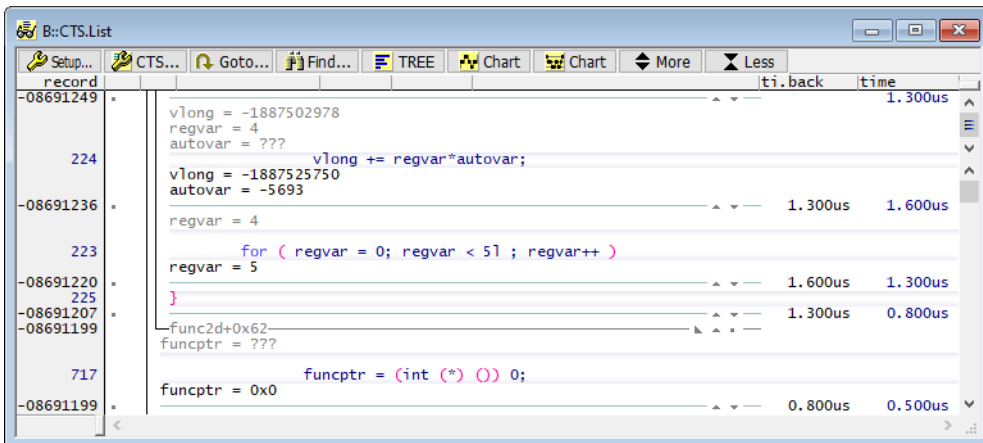

## Description of Buttons in the CTS.List Window

<b>Setup ...</b>	Open a <a href="#">&lt;trace&gt;.state</a> window to configure the trace.
<b>CTS ...</b>	Open a <a href="#">CTS.view</a> window to configure CTS.
<b>Goto ...</b>	Open a <a href="#">&lt;trace&gt;.GOTO</a> dialog box to move the cursor to a specific record.
<b>Find ...</b>	Open a <a href="#">&lt;trace&gt;.Find</a> dialog box to search for specific entries in the trace.
<b>TREE</b>	Open a <a href="#">CTS.STATistic.TREE</a> window to display the call structure of the trace contents as a tree.
<b>Chart</b>	Opens a <a href="#">CTS.Chart.sYmbol</a> window to display the program execution time at different symbols as a time chart.
<b>Chart</b>	Opens a <a href="#">CTS.Chart.Func</a> window to display the time spent in different functions as chart.
<b>More/Less</b>	<p>The <b>More</b> and <b>Less</b> button allow to switch between the following displays:</p> <ul style="list-style-type: none"> <li>• Interrupts and task levels</li> <li>• Function nesting</li> <li>• HLL lines</li> <li>• HLL lines and disassembled code</li> <li>• All CPU cycles</li> </ul>

Cache analysis results (when enabled) are shown in the following formats:

- [<cache\\_mode> <cyclecount>?](#)  
Information about a number of accesses is unknown.
- [<cache\\_mode> <hits>/<misses>](#)  
Regular cached cycles.
- [<cache\\_mode> <hits>/<misses>/<bypasses>](#)  
Bypasses are cycles that where not using the cache (non-allocated write cycles or trash cycles).

See also

■ [CTS](#)

■ [CTS.state](#)

CTS.ListNesting

Analyze function nesting

Format:

CTS.ListNesting[<trace\_area>] [/<option>]

Investigates issues in the construction of the call tree for the nesting function run-time analysis based on the CTS data.

Refer to [<Trace>.ListNesting](#) for a description of the parameters and options.

See also

- CTS
- ▲ 'Release Information' in 'Legacy Release History'

CTS.Mode

Operation mode

Format:

CTS.Mode [Full | Memory | CACHE]

Full (default)	The trace contains the full program and data flow information.
Memory	The trace contains only data flow information, a selective trace on specific data accesses was performed. CTS can reconstruct the memory contents only. CTS is used here e.g. to reconstruct the contents of several HLL variables or task control block information.
CACHE	Reconstruct the contents of caches and TBLs (only required if a cache analysis is performed).

See also

- CTS
- CTS.state

Format: CTS.OFF

Trace-based debugging is switch to off. The current context of the target system is re-displayed on the TRACE32 screen.

See also

[CTS](#)[CTS.state](#)

Format: CTS.ON

Switches trace-based debugging to ON. The starting point is either 0./1. or the last selected record.

Use [CTS.GOTO](#) to switch CTS to ON with at specific starting point.

See also

[CTS](#)[CTS.state](#)  
[▲ 'Release Information' in 'Legacy Release History'](#)

Format: CTS.PROCESS [/FILE]

Switches CTS to ON and calculates the results for the cache analysis by processing the complete trace contents.

See also

[CTS](#)[CTS.state](#)

Format:

CTS.PROfileChart [*<trace\_area>*] [*/<option>*]

Displays distributions versus time graphically based on the CTS data. Gaps in the trace caused by FIFO overflows are filled by CTS when SmartTrace is enabled ([CTS.SmartTrace ON](#)).

Refer to [<trace>.PROfileChart](#) for a description of the parameters and options.

See also

- [CTS](#)
- [CTS.Chart.sYmbol](#)
- [CTS.STATistic](#)
- ▲ ['Release Information' in 'Legacy Release History'](#)

CTS.PROfileChart.CACHE

Display cache analysis results graphically

Format:

CTS.PROfileChart.CACHE *<cache>* [*<trace\_area>*] [*/<option>*]

*<cache>*

IC | DC | L2 | L3 | STALLS | BUS0 | BUS1 | BUS2 | BUS3 | MIPS | BTAC |  
STATIC | RSTACK

*<option>*

FILE  
FlowTrace | BusTrace  
ReScale | TimeScale | TimeZero | TimeREF  
Vector | Steps  
Track | ZoomTrack

Displays the results of the CTS cache analysis as profile chart.



*<trace\_area>*

Refer to [<trace>.PROfileChart](#)

*<option>*

Example:

```
CTC.Mode CACHE
CTS.ON
CTS.PROfileChart DC
CTS.PROfileChart IC
```

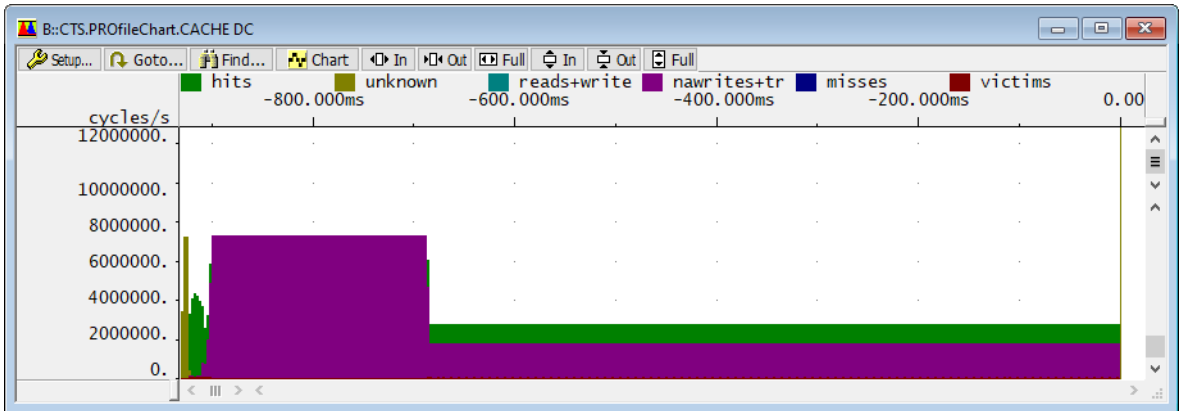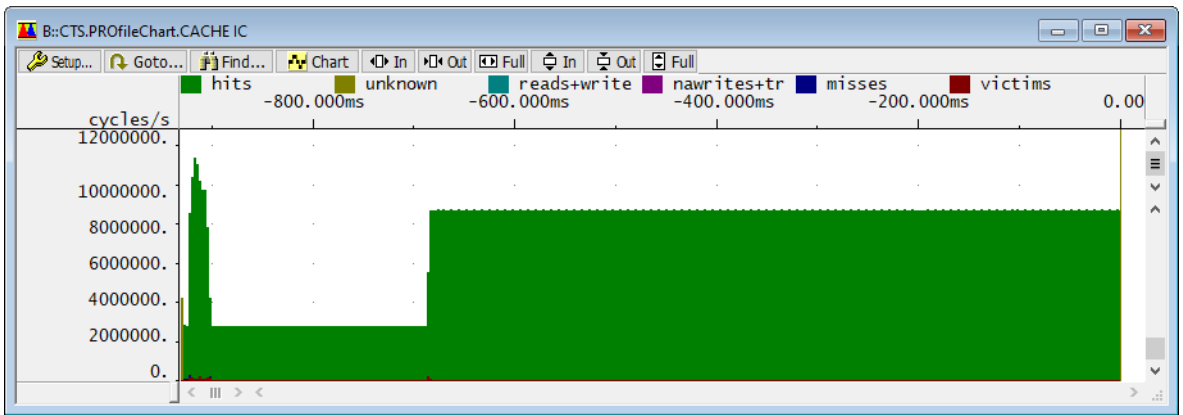

#### See also

■ [CTS.CACHE](#)

## CTS.PROfileChart.sYmbol

Dynamic program behavior as profile chart

Format: **CTS.PROfileChart.sYmbol** [*<trace\_area>*] [/<option>]

Displays the dynamic program behavior versus time graphically based on the CTS data.

Refer to [<trace>.PROfileChart.sYmbol](#) for a description of the parameters and options.

#### See also

■ [<trace>.PROfileChart.sYmbol](#)

Format:

CTS.PROfileChart.TASK [*<trace\_area>*] [*/<option>*]

Displays the dynamic task behavior versus time graphically based on the CTS data. This feature is only available if TRACE32 has been set for OS-aware debugging.

Refer to [<trace>.PROfileChart.TASK](#) for a description of the parameters and options.

See also

- [<trace>.PROfileChart.TASK](#)

CTS.PROfileChart.TASKINFO

Profile chart for context ID special messages

Format:

CTS.PROfileChart.TASKINFO [*<trace\_area>*] [*/<option>*]

Displays a graphical profile chart based on the CTS data for special messages written to the context ID register (ETM trace).

Refer to [<trace>.PROfileChart.TASKINFO](#) for a description of the parameters and options.

See also

- [<trace>.PROfileChart.TASKINFO](#)

CTS.PROfileChart.TASKINTR

ISR2 profile chart

Format:

CTS.PROfileChart.TASK [*<trace\_area>*] [*/<option>*]

Displays the dynamic behavior of ORTI based ISR2 versus time graphically based on the CTS data. This feature can only be used if ISR2 can be traced based on the information provided by the ORTI file. Please refer to “[OS Awareness Manual NORTI](#)” (rtos\_norti.pdf) for more information.

Refer to [<trace>.PROfileChart.TASKINTR](#) for a description of the parameters and options.

See also

- [<trace>.PROfileChart.TASKINTR](#)



Format: CTS.PROfileChart.TASKKernel [*<trace\_area>*] [*/<option>*]

Similar command to [<trace>.PROfileChart.TASKKernel](#). The analysis is however based on the CTS data. This feature is only available if TRACE32 has been set for OS-aware debugging.

Refer to [<trace>.PROfileChart.TASKKernel](#) for a description of the parameters and options.

See also

- [<trace>.PROfileChart.TASKKernel](#)

CTS.PROfileChart.TASKORINTERRUPT

Task and interrupt profile chart

Format: CTS.PROfileChart.TASKORINTERRUPT [*<trace\_area>*] [*/<option>*]

Displays the dynamic behavior of tasks and interrupts versus time graphically based on the CTS data. This feature is only available if TRACE32 has been set for OS-aware debugging.

Refer to [<trace>.PROfileChart.TASKORINTERRUPT](#) for a description of the parameters and options.

See also

- [<trace>.PROfileChart.TASKORINTERRUPT](#)

CTS.PROfileChart.TASKSRV

OS service routines profile chart

Format: CTS.PROfileChart.TASKSRV [*<trace\_area>*] [*/<option>*]

Displays the dynamic behavior of OS service routines versus time graphically based on the CTS data. This feature is only available if an OSEK/ORTI system is used and if the OS Awareness is configured with the [TASK.ORTI](#) command. Please refer to “[OS Awareness Manual NORTI](#)” (rtos\_norti.pdf) for more information.

Refer to [<trace>.PROfileChart.TASKSRV](#) for a description of the parameters and options.

See also

- [<trace>.PROfileChart.TASKSRV](#)

Format:

CTS.PROfileChart.TASKVSINTR [*<trace\_area>*] [*/<option>*]

Displays the dynamic behavior of task-related interrupts versus time graphically based on the CTS data. This feature is only available if an OSEK/ORTI system is used and if the OS Awareness is configured with the **TASK.ORTI** command. Please refer to “**OS Awareness Manual NORTi**” (rtos\_norti.pdf) for more information.

Refer to [<trace>.PROfileChart.TASKVSINTR](#) for a description of the parameters and options.

See also

- [<trace>.PROfileChart.TASKVSINTR](#)

Format: CTS.RESet

Resets the CTS setting and switch trace based debugging to off.

See also

- CTS
- CTS.state

CTS.SELectiveTrace

Trace contains selective trace information

Format: CTS.SELectiveTrace [ON | OFF]

- ON

A selective trace was performed, so the trace buffer does not contain the complete program and data flow. The sampling to the trace buffer is either controlled by the development tool or by the processor. In this case CTS clears the register and memory context after each discontinuance of the program/data flow.  
It is recommended to switch CTS.UseFinalMemory to OFF (not supported for all CPUs).
- OFF (default)

The trace contains the relevant program and data flow.

See also

- CTS

CTS.SKIP

Select the specified record for CTS (relative)

Format: CTS.SKIP <delta> [/FILE]

Selects a specific record for CTS relative to the currently selected record.

CTS.SKIP 20 .

See also

- CTS
- CTS.state

Format:

CTS.SmartTrace [ON | OFF]

Enables/disables CTS **SmartTrace**. When **SmartTrace** is enabled, all CTS commands as **CTS.List** and **CTS.Chart** will fill gaps in the trace caused by FIFO overflows.

Only supported for the following architectures:

- PowerPC MPC5xx Nexus
- PowerPC MPC5xxx Nexus
- ARM ETMv3
- MCore Nexus
- StarCore Nexus

SmartTrace is an algorithm developed by LAUTERBACH. It allows to offset trace data loss caused by a FIFO OVERFLOW under certain circumstances. SmartTrace investigates whether there is a clear path from address A to address B via direct branches that can be reached in the calculated number of clock cycles with the instructions used. If a clear path exists the lost trace data can be reconstructed.


See also

- CTS
- CTS.state
- ▲

'Release Information' in 'Legacy Release History'

Format: CTS.state [<address> | <range>]

Displays the CTS settings.

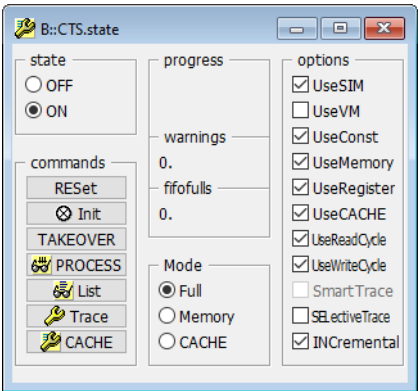

The settings below are recommended in case:

- the program execution is still running while CTS is used
- or not all CPU cycles until the stop of the program execution are sampled to the trace buffer

In both cases the current state of the target can not be used by CTS.

```
CTS.UseFinalMemory OFF ; don't use the current state of
                        ; the target memory for CTS

CTS.UseFinalContext OFF ; don't use the current state of
                        ; the CPU register for CTS

MAP.CONST ; attribute the constant section
sYmbol.SECRANGE(\.sdata2)

Data.COPY ; copy contents of constant section
sYmbol.SECRANGE(\.sdata2) VM: ; to the virtual memory. This
                        ; allows CTS to use this memory
                        ; contents even when the program
                        ; execution is running

CTS.UseConst ON ; read accesses to all memory
                ; locations with the attribute
                ; CONST are used by CTS
```

Recommended settings for selective trace on data:

```
CTS.Mode Memory ; CTS reconstructs only the memory
```

Recommended settings if a selective trace is used:

```
CTS.SELectiveTrace ON                ; Clear memory and register context
                                      ; at each discontinuance of the
                                      ; program/data flow
```

The following settings are only necessary if the not sampled parts of the program/data flow change the memory or register contents.

```
CTS.UseFinalMemory OFF              ; CTS doesn't use the current
                                      ; memory

CTS.UseFinalContext OFF             ; CTS doesn't use the current CPU
                                      ; registers
```

Recommended settings if only the program flow is sampled to the trace buffer:

```
CTS.UseFinalMemory OFF              ; CTS doesn't use the current
                                      ; memory
```

See also

- |                                    |                                      |                                       |                                      |
|------------------------------------|--------------------------------------|---------------------------------------|--------------------------------------|
| ■ <a href="#">CTS</a>              | ■ <a href="#">CTS.CACHE</a>          | ■ <a href="#">CTS.CACHE.state</a>     | ■ <a href="#">CTS.CAPTURE</a>        |
| ■ <a href="#">CTS.Chart.sYmbol</a> | ■ <a href="#">CTS.GOTO</a>           | ■ <a href="#">CTS.INCremental</a>     | ■ <a href="#">CTS.Init</a>           |
| ■ <a href="#">CTS.List</a>         | ■ <a href="#">CTS.Mode</a>           | ■ <a href="#">CTS.OFF</a>             | ■ <a href="#">CTS.ON</a>             |
| ■ <a href="#">CTS.PROCESS</a>      | ■ <a href="#">CTS.RESet</a>          | ■ <a href="#">CTS.SKIP</a>            | ■ <a href="#">CTS.SmartTrace</a>     |
| ■ <a href="#">CTS.TAKEOVER</a>     | ■ <a href="#">CTS.UseConst</a>       | ■ <a href="#">CTS.UseFinalContext</a> | ■ <a href="#">CTS.UseFinalMemory</a> |
| ■ <a href="#">CTS.UseSIM</a>       | ■ <a href="#">Go.BackTillWarning</a> | ■ <a href="#">Go.TillWarning</a>      |                                      |

The **CTS.STATistic** command group displays a statistical analysis based on the CTS data. Gaps in the trace caused by FIFO overflows are filled by CTS when SmartTrace is enabled (**CTS.SmartTrace ON**).

See also

- [CTS](#)
- [CTS.PROfileChart](#)

CTS.STATistic.ChildTREE

Show callee context of a function

Format:

**CTS.STATistic.ChildTREE** <address> [/<option>]

Show call tree and run-time of all functions called by the specified function based on the CTS data. The function is specified by its start <address>.

Refer to the description of [<trace>.STATistic.ChildTREE](#) for more information.

See also

- [<trace>.STATistic.TREE](#)

CTS.STATistic.Func

Nesting function runtime analysis

Format:

**CTS.STATistic.Func** [<trace\_area>] [/<option>]

Analyzes the function nesting and calculates the time spent in functions and the number of function calls based on the CTS data. CTS tries to fill gaps in the trace using SmartTrace.

Refer to the description of [<trace>.STATistic.Func](#) for more information.

See also

- [<trace>.STATistic.Func](#)

Format:           **CTS.STATistic.GROUP** [*<trace\_area>*] [*/<option>*]

The time spent in **groups** and the number of calls is calculated (flat statistic) based on the CTS data. CTS tries to fill gaps in the trace using SmartTrace. The results only include groups within the program range. Groups for data addresses are not included.

Refer to the description of **<trace>.STATistic.GROUP** for more information.

---

**See also**

■ **<trace>.STATistic.GROUP**

---

**CTS.STATistic.INTERRUPT**

## Interrupt statistic

Format:           **CTS.STATistic.INTERRUPT** [*<trace\_area>*] [*/<option>*]

Analyzes the function nesting and calculates the time spent in interrupts and the number of interrupt calls based on the CTS data. CTS tries to fill gaps in the trace using SmartTrace. This feature is only available if TRACE32 has been set for OS-aware debugging.

Refer to the description of **<trace>.STATistic.INTERRUPT** for more information.

---

**See also**

■ **<trace>.STATistic.INTERRUPT**

---

**CTS.STATistic.INTERRUPTTREE**

## Interrupt nesting

Format:           **CTS.STATistic.INTERRUPTTREE** [*<trace\_area>*] [*/<option>*]

This command displays a graphical tree of the interrupt nesting based on the CTS data. This feature is only available if TRACE32 has been set for OS-aware debugging.

Refer to the description of **<trace>.STATistic.INTERRUPTTREE** for more information.

---

**See also**

■ **<trace>.STATistic.INTERRUPTTREE**



Format: CTS.STATistic.LINKage [<trace\_area>] [/<option>]

Performs a function run-time statistic for a single function itemized by its callers based on the CTS data. CTS tries to fill gaps in the trace using SmartTrace.

Refer to the description of [<trace>.STATistic.LINKage](#) for more information.

See also

- [<trace>.STATistic.LINKage](#)

CTS.STATistic.MODULE

Code execution broken down by module

Format: CTS.STATistic.MODULE [<trace\_area>] [/<option>]

Shows a statistical analysis of symbol modules based on the CTS data. The list of loaded modules can be displayed with [sYmbol.List.Module](#). CTS tries to fill gaps in the trace using SmartTrace.

Refer to the description of [<trace>.STATistic.MODULE](#) for more information.

See also

- [<trace>.STATistic.MODULE](#)

CTS.STATistic.ParentTREE

Show the call context of a function

Format: CTS.STATistic.ParentTREE [<trace\_area>] [/<option>]

Show call tree and run-time of all callers of the specified function based on the CTS data. CTS tries to fill gaps in the trace using SmartTrace.

Refer to the description of [<trace>.STATistic.ParentTREE](#) for more information.

See also

- [<trace>.STATistic.ParentTREE](#)

Format: CTS.STATistic.PROGRAM [<trace\_area>] [/<option>]

Shows a statistical analysis of loaded object file programs based on the CTS data. CTS tries to fill gaps in the trace using SmartTrace. The loaded programs can be displayed with the command **sYmbol.Browse \\***.

Refer to the description of **<trace>.STATistic.PROGRAM** for more information.

See also

- **<trace>.STATistic.PROGRAM**

CTS.STATistic.RUNNABLE

Runnable runtime analysis

Format: CTS.STATistic.RUNNABLE [<trace\_area>] [/<option>]

Analyzes the function nesting and calculates the time spent in AUTOSAR Runnables and the number of Runnable calls based on the CTS data. CTS tries to fill gaps in the trace using SmartTrace. This feature is only available if an OSEK/ORTI system is used and if the OS Awareness is configured with the **TASK.ORTI** command. Please refer to “**OS Awareness Manual NORTi**” (rtos\_norti.pdf) for more information.

Refer to the description of **<trace>.STATistic.RUNNABLE** for more information.

See also

- **<trace>.STATistic.RUNNABLE**

CTS.STATistic.sYmbol

Flat run-time analysis

Format: CTS.STATistic.sYmbol [<trace\_area>] [/<option>]

Displays the execution time in different symbol regions based on the CTS data. CTS tries to fill gaps in the trace using SmartTrace.

Refer to the description of **<trace>.STATistic.sYmbol** for more information.

See also

- **<trace>.STATistic.sYmbol**

Format: **CTS.STATistic.TASK** [*<trace\_area>*] [*/<option>*]

Displays a task runtime statistic based on the CTS data. CTS tries to fill gaps in the trace using SmartTrace. This feature is only available if TRACE32 has been set for OS-aware debugging.

Refer to the description of [<trace>.STATistic.TASK](#) for more information.

---

**See also**

■ [<trace>.STATistic.TASK](#)

---

**CTS.STATistic.TASKINFO****Statistic for context ID special messages**

Format: **CTS.STATistic.TASKINFO** [*<trace\_area>*] [*/<option>*]

Displays a run-time statistic based on the CTS data for special messages written to the context ID register (ETM trace).

Refer to [<trace>.STATistic.TASKINFO](#) for a description of the parameters and options.

---

**See also**

■ [<trace>.STATistic.TASKINFO](#)

---

**CTS.STATistic.TASKINTR****ISR2 statistic (ORTI)**

Format: **CTS.STATistic.TASKINTR** [*<trace\_area>*] [*/<option>*]

Displays an ORTI based ISR2 runtime statistic based on the CTS data. CTS tries to fill gaps in the trace using SmartTrace. This feature can only be used if ISR2 can be traced based on the information provided by the ORTI file. Please refer to [“OS Awareness Manual NORTI”](#) (rtos\_norti.pdf) for more information.

Refer to the description of [<trace>.STATistic.TASKINTR](#) for more information.

---

**See also**

■ [<trace>.STATistic.TASKINTR](#)

Format: **CTS.STATistic.TASK** [*<trace\_area>*] [*/<option>*]

Similar command to [<trace>.STATistic.TASKKernel](#). The analysis is however based on the CTS data. This feature is only available if TRACE32 has been set for OS-aware debugging.

Refer to the description of [<trace>.STATistic.TASKKernel](#) for more information.

#### See also

■ [<trace>.STATistic.TASKKernel](#)

## CTS.STATistic.TASKORINTERRUPT

## Task and interrupt statistic

Format: **CTS.STATistic.TASKORINTERRUPT** [*<trace\_area>*] [*/<option>*]

Displays the execution time in different tasks and interrupts based on the CTS data. CTS tries to fill gaps in the trace using SmartTrace. This feature is only available if TRACE32 has been set for OS-aware debugging.

Refer to the description of [<trace>.STATistic.TASKORINTERRUPT](#) for more information.

#### See also

■ [<trace>.STATistic.TASKORINTERRUPT](#)

## CTS.STATistic.TASKSRV

## OS service routines statistic

Format: **CTS.STATistic.TASKSRV** [*<trace\_area>*] [*/<option>*]

Displays the execution time in OS service routines based on the CTS data. CTS tries to fill gaps in the trace using SmartTrace. This feature is only available if an OSEK/ORTI system is used and if the OS Awareness is configured with the [TASK.ORTI](#) command. Please refer to “[OS Awareness Manual NORTI](#)” (rtos\_norti.pdf) for more information.

Refer to the description of [<trace>.STATistic.TASKSRV](#) for more information.

#### See also

■ [<trace>.STATistic.TASKSRV](#)

## CTS.STATistic.TASKVSINTERRUPT

Statistic of interrupts, task-related

Format: **CTS.STATistic.TASKVSINTERRUPT** [*<trace\_area>*] [*/<option>*]

Displays the execution time in task-related interrupts based on the CTS data. CTS tries to fill gaps in the trace using SmartTrace. This feature is only available if TRACE32 has been set for OS-aware debugging.

Refer to the description of [<trace>.STATistic.TASKVSINTERRUPT](#) for more information.

#### See also

■ [<trace>.STATistic.TASKVSINTERRUPT](#)

## CTS.STATistic.TREE

Tree display of nesting function run-time analysis

Format: **CTS.STATistic.TREE** [*<trace\_area>*] [*/<option>*]

The results of this command shows a graphical tree of the function nesting based on the CTS data. CTS tries to fill gaps in the trace using SmartTrace.

Refer to the description of [<trace>.STATistic.TREE](#) for more information.

#### See also

■ [<trace>.STATistic.TREE](#)

▲ 'Release Information' in 'Legacy Release History'

CTS.TAKEOVER

Take memory/registers reconstructed by CTS over to target

Format:

CTS.TAKEOVER

If CTS is active, the TRACE32 screen displays the contents of the registers and memories as they have been when the currently active CTS record (see the yellow CTS field in the state line) was sampled to the state line. The command **CTS.TAKEOVER** takes the register and memory contents over to the target and deactivates CTS.

See also

■ CTS

■ CTS.state

CTS.UNDO

Revert last CTS command

Format:

CTS.UNDO

Undoes last CTS run-control command (e.g CTS Step).

See also

■ CTS.UseConst

■ CTS.UseFinalMemory

■ CTS.UseSIM

■ CTS

CTS.UseConst

Use constants for the CTS processing

Format:

CTS.UseConst [ON | OFF]

**CTS.UseConst** become effective after **CTS.UseFinalMemory** is set to OFF.

- ON

Read accesses to all memory locations that have the mapper attribute CONST are evaluated by CTS even if **CTS.UseFinalMemory** is switched to **OFF**.
- OFF

Memory locations with the attribute CONST are not used by CTS.

See also

■ CTS.UNDO

■ CTS.UseDataTrace

■ CTS.UseFinalContext

■ CTS.UseFinalMemory

■ CTS.UseSIM

■ CTS.UseStartMemory

■ CTS

■ CTS.state

Format:

CTS.UseDataTrace [ON | OFF]

- ON (default)

CTS uses the data cycles sampled to the trace buffer.
- OFF

CTS doesn't use the data cycles sampled to the trace buffer.

See also

- CTS.UseConst
- CTS.UseFinalMemory
- CTS.UseSIM
- CTS

Format:

CTS.UseFinalContext [ON | OFF]  
CTS.UseRegister [ON | OFF] (deprecated)

- ON (default)

CTS uses the current contents of the CPU registers. When a CPU register was not accessed by the program section sampled to the trace buffer, CTS assumes, that the register had the current contents during all program steps.
- OFF

CTS doesn't use the current contents of the CPU registers. This is required if the program execution is still running when CTS is used or if the program execution was still running after the sampling to the trace buffer was stopped.

See also

- CTS.UseFinalMemory
- CTS.UseConst
- CTS.UseSIM
- CTS
- CTS.state

Format:

CTS.UseFinalMemory [ON | OFF]  
CTS.UseMemory [ON | OFF] (deprecated)

ON (default)	<p>The memory contents is used by CTS.</p> <ul style="list-style-type: none"><li>When a memory location was not accessed by the program section sampled to the trace buffer, CTS assumes, that the memory location had the current contents during all program steps.</li><li>When there was no write access to a memory location by the program section sampled to the trace buffer, CTS assumes, that the current contents was read by read accesses to this memory location sampled to the trace buffer.</li></ul> <p>To set <b>CTS.UseFinalMemory</b> to ON requires, that all CPU cycles until the stop of the program execution were sampled to the trace buffer. Memory ranges that are changed not only by the CPU core e.g. peripherals or dual-ported memories can be excluded by using the <b>MAP.VOLATILE</b> command</p>
OFF	<p><b>CTS.UseFinalMemory OFF</b> is required:</p> <ul style="list-style-type: none"><li>if not all CPU cycles until the stop of the program execution were sampled to the trace buffer.</li><li>if the program execution is still running while CTS is used.</li><li>if no data flow is sampled to the trace buffer.</li></ul> <p><b>MAP.CONST</b> can be used to define memory ranges with constant contents that are used by CTS if <b>CTS.UseConst</b> is set to <b>ON</b>.</p>

See also

- CTS.UseFinalContext
- CTS.UNDO
- CTS.UseConst
- CTS.UseDataTrace
- CTS.UseSIM
- CTS.UseStartMemory
- CTS
- CTS.state
- MAP.VOLATILE



Format:

CTS.UseSIM [ON | OFF]

ON (default)

CTS uses the instruction set simulator.

OFF

(For error diagnosis only.)

See also

- [CTS.UseStartMemory](#)

■ [CTS.UNDO](#)

■ [CTS.UseConst](#)

■ [CTS.UseDataTrace](#)
- [CTS.UseFinalContext](#)

■ [CTS.UseFinalMemory](#)

■ [CTS](#)

■ [CTS.state](#)

Format:                    **CTS.UseStartMemory [ON | OFF]**  
                             **CTS.UseVM [ON | OFF]** (deprecated)

This command is typically used for short trace recordings to minimize the number of unknown cycles. It allows you to use the virtual memory contents as initial values for CTS. When you use the command, make sure that the trace recording contains the program start.

**ON**                        The virtual memory contents (VM:) are used as initial values for CTS. This allows you to have valid memory contents even for the first record.

**OFF**                      The virtual memory contents are *not* used.

```
...
; It is recommended to make this setting very early on in a script.
CTS.UseStartMemory ON
...
; -----
; For the 1st analysis:

; Before the trace is started, data can be copied to the virtual memory
; (VM:) of TRACE32.
; Copy contents of specified address range to TRACE32 virtual memory.
Data.Copy 0x3fa000++0xffff VM:
; Start the trace recording and completely fill the trace buffer.
Go
Break
...
; -----
; For the 2nd analysis:

; Repeat the above Data.Copy command.
CTS.CAPTURE
; Start the trace recording and completely fill the trace buffer.
Go
Break
...
```

## See also

■ [CTS.UseSIM](#)

■ [CTS.UseConst](#)

■ [CTS.UseFinalMemory](#)

■ [CTS](#)