



A




C

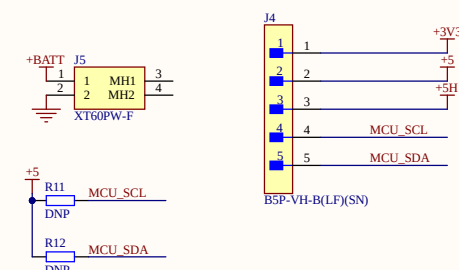

Debug Led

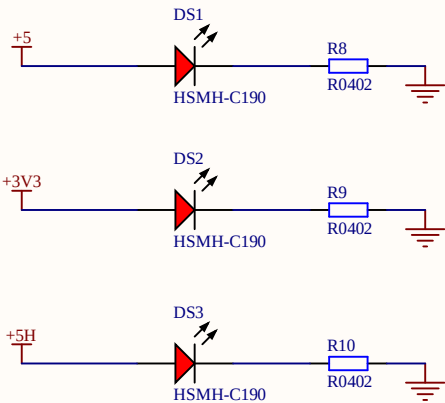


XT-60



Molex Microfit

Title		
Size A4	Number	Revision
Date:	7-24-2026	Sheet of
File:	C:\Users\...\Sheet2.SchDoc	Drawn By:

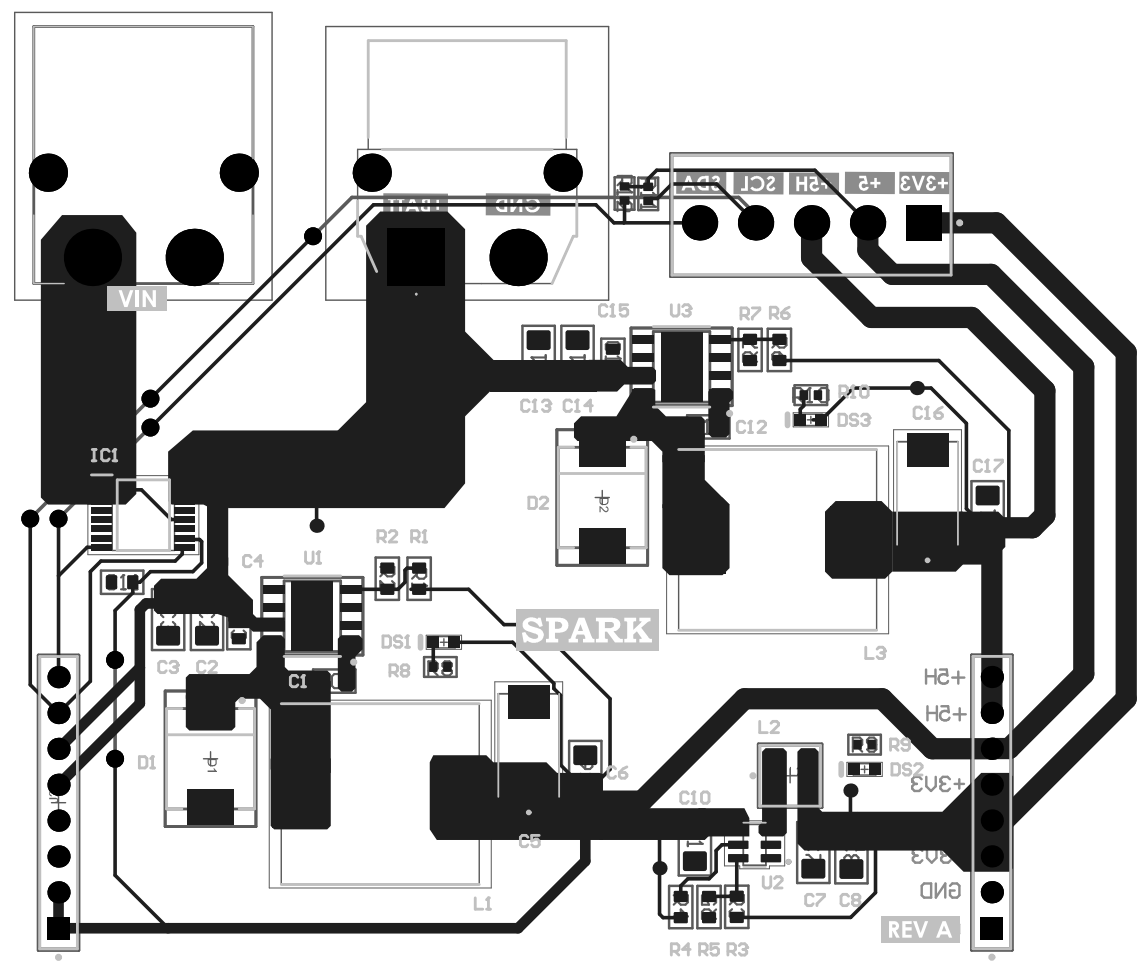

Comment	Description	Designator	Footprint	LibRef	Quantity
100n	Capacitor SMD 0603	C1, C11, C12	CAP_0603	CAP_0603	3
4u7	Capacitor SMD 0805	C2, C3	CAP_0805	CAP_0805	2
10n	Capacitor SMD 0603	C4, C15	CAP_0603	CAP_0603	2
10TPB330M		C5, C16	CAP_10TPB330M	10TPB330M	2
100n	Capacitor SMD 0805	C6	CAP_0805	CAP_0805	1
C0805	Capacitor SMD 0805	C7, C8, C10, C13, C14, C17	CAP_0805	CAP_0805	6
B540C-13-F	DIODE SCHOTTKY 40V 5A SMC	D1, D2	FP-SMC-MFG	CMP-2000-05097-3	2
HSMH-C190	LED Uni-Color Red, 65 mW, 20 mA, -40 to 85 degC, 2-Pin SMD, RoHS, Tape and Reel	DS1, DS2, DS3	AVAG-HSMX-C190_V	CMP-007-00014-2	3
INA260AIPWR	Integrated Circuit	IC1	SOP65P640X120-16N	INA260AIPWR	1
TSW-108-08-G-S	CONN HEADER VERT 8POS 2.54MM	J1, J2	FP-TSW-108-08-G-S-MFG	CMP-02766-000001-1	2
XT60PW-M	Connector	J3	XT60PWM	XT60PW-M	1
B5P-VH-B(LF)(SN)	CONN HEADER VERT 5POS 3.96MM	J4	FP-B5P-VH-B_LF_SN-MFG	CMP-17439-000483-1	1
XT60PW-F	Connector	J5	XT60PWF	XT60PW-F	1
PA4343.153NLT	Inductor	L1, L3	INDPMM140128X650N	PA4343.153NLT	2
XAL4020-222MEC	Fixed Inductors 2.2uH Shld 20% 5.5A 38.7mOhms AECQ2	L2	FP-XAL4020-MFG	CMP-11268-000134-1	1
R0603	Resistor SMD 0603	R1, R2, R3, R4, R5, R6, R7	RES_0603	RES_0603	7
R0402	Resistor SMD 0402	R8, R9, R10	RES_0402	RES_0402	3
DNP	Resistor SMD 0402	R11, R12	RES_0402	RES_0402	2
TPS5450DDAR	IC REG BUCK ADJUSTABLE 5A 8SOPWR	U1, U3	FP-DDA0008J-MFG	CMP-04918-000100-1	2
TLV62569PDDCR	2.5V-5.5V input, 2-A high efficiency step-down buck converter in SOT23 and SOT563 package	U2	SOT95P280X110-6N	TLV62569PDDCR	1