Ex No: 09

10.08.26

Setting up a local area network

Aim:-

To design setup and configure a local Area Network (LAN) for computers through a network switch.

Procedure:-

Step 1: Place the Devices

1. Open Cisco Packet Tracer
2. From the device category, select End Devices and drag 4 PCs onto the
3. Select switches and drag 1 switch on to the wo.

Step 2: Cable the your computers to network with via an ethernet cable,

step 3: Assign IP addres to your PCs

Step 4: 1. log on to the client computer as admin

2. Click network and Internet connections
3. Right click IPV4 → Go to properties → click on properties.

IP Address configuration Table

Device	IP address	Subnet mask	Connected To
PC0	10.1.1.1	255.0.0.0	Fa0/1
PC1	10.1.1.2	255.0.0.0	Fa0/2
PC2	10.1.1.3	255.0.0.0	Fa0/3
PC3	10.1.1.4	255.0.0.0	Fa0/4
Switch	10.1.1.5	255.0.0.0	VLAN 1

step 5:

a) Click the switch → CLI tab

b) Enter the following commands

enable

configure terminal

interface vlan 1

ip address 10.1.1.5

no shutdown

exit

step 6: Verify pc connectivity

step 7: Demonstrate Data sharing

a) Add a server device

b) Assign it an IP address


c) Open the server's services

d) from another PC, open the web browser

step 8: Observe Packet flow in simulation mode

a) Switch to simulation mode

b) Send a ping or web request between two devices and use the play / capture controls.

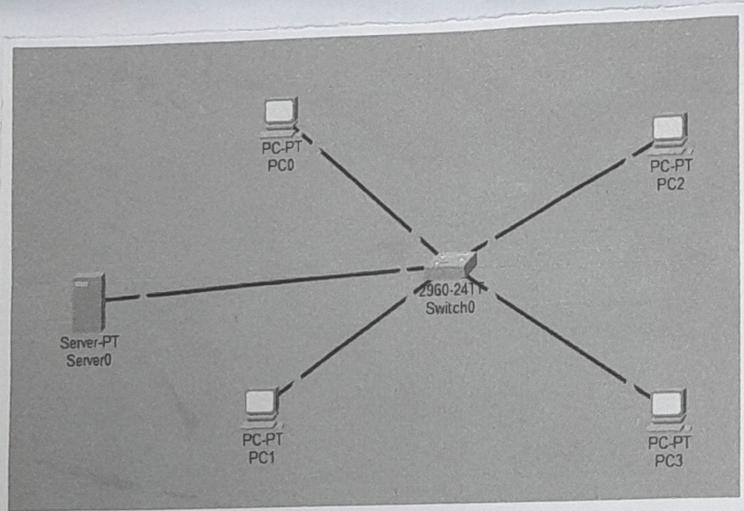

Result:- OK

Thus the setting up a LAN has been executed successfully.