


USER MANUAL

ENGLISH - VERSION 223

Rev. 1/12/2025

EURUS

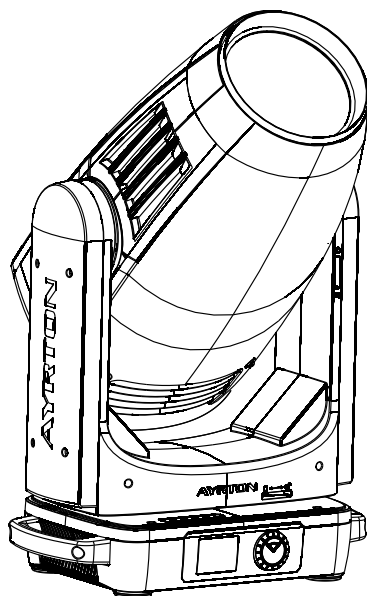

AYRTON

Digital Lighting



2 Rue de Vitruve,
91140 Villebon-sur-Yvette,
France

CONTENTS

1. SAFETY INSTRUCTIONS 3

2. FEATURES 3

3. FIXTURE OVERVIEW 4

4. DRAWINGS 4

5. INSTALLATION INSTRUCTIONS 6

6. DMX-512 CONTROL CONNECTION 6

7. DMX-512 CONNECTION WITH DMX TERMINATOR 6

8. DEVICE DMX START ADDRESS SELECTION 7

9. OPERATING INSTRUCTIONS OF THE INTERNAL DMX WIRELESS SYSTEM 7

10. DISPLAY 7

11. DMX PROTOCOL 11

12. ERROR MESSAGES 11

13. CLEANING AND MAINTENANCE 12

Keep this manual for future needs.

Errors and omissions for all information given in this user manual are possible.
All information is subject to change without prior notice.



1. SAFETY INSTRUCTIONS

1.1 > IMPORTANT SAFETY WARNINGS

This device has left the factory in perfect condition. In order to maintain this condition and to ensure safe operation, it is absolutely necessary for the user to follow the safety instructions and warning notes written in this user manual.

In order to install, operate and maintain the lighting fixture safely and correctly we suggest that the installation and operation be carried out by qualified technicians and these instructions be carefully followed.

CAUTION	
	High voltage. Risk of severe or fatal electric shock.
	Always disconnect mains supply before removing any fixture covers.
	Never look directly into the light source. Sensitive persons may suffer an epileptic shock.
	Never touch the device during operation. Covers may be hot.
	Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
	Note: This equipment has been tested and found to comply with the limits for a class A digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Damage caused by the disregard of this user manual is not subject to warranty. The dealer and manufacturer will not accept liability for any resulting defects or problems.

- If the device has been exposed to temperature changes due to environmental conditions, do not power on immediately. The resulting condensation could damage the device. Leave the device powered off until it has reached room temperature.
- Ensure the sealing rubber covers of power CON and XLR connectors are fitted properly when the device is not in use, to avoid water ingress.
- This device falls under protection-class I. Therefore, it is essential that the device be earthed.
- If either lenses or display are damaged (damage may include cracks or gashes in the material) they must be replaced.
- Electrical connections, such as replacing the power plug, must be performed by a qualified person.
- Make sure that the available voltage is not higher than that which is stated in this manual.
- Make sure the power cord is never crushed or damaged by sharp

edges. If this should be the case, replacement of the cable must be done by an authorized dealer.

- If the external flexible power cord of this device is damaged, it shall be exclusively replaced by the manufacturer or their service agent or a similar qualified person in order to avoid injury.
- When the device is not in use or before performing maintenance, always disconnect the device from the mains. Only handle the power cord from the plug. Never pull the plug out of a socket by tugging the power cord.
- When powered on for the first time, some smoke or smell may occur. This is caused by coating on metal parts when heated and is normal. If you are concerned, please contact your distributor.
- Do not focus the beam onto flammable surfaces. The minimum distance between the exiting lens of the device and the illuminated surface must be greater than 3 meters.

CAUTION

Please be aware that damage caused by any modifications to the device are not subject to warranty. Keep away from children and non-professionals.

1.2 > GENERAL GUIDELINES

- This device is a lighting effect for professional use on stages, in discotheques, theatres, etc. the device was designed for indoor use only.
- This fixture is only allowed to be operated within the maximum alternating current as stated in the technical specifications in section 2 of this manual.
- Handle the device with care, avoid shaking or using force when installing or maintaining the device.
- If you use the quick lock cam when rigging the device, make sure the quick lock fasteners are located in the quick lock holes correctly and securely.
- Operate the device only after having familiarized yourself with its functions. Do not permit operation by persons not qualified for operating the device. Most damage is the result of unprofessional operation.
- Please use the original packaging if the device is to be transported.
- The applicable temperature for the device is between -10°C to 45°C. Do not use the device outside of this temperature range.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

CAUTION

For safety reasons, please be aware that all modifications to the device are forbidden. If this device is operated in any way different to the ones described in this manual, the product may suffer damage and the warranty becomes void. Furthermore, any other operation may lead to short-circuits, burns, electric shocks etc.

2. FEATURES

POWER SUPPLY

- AC 100-240 V~, 50/60 Hz
- Power Consumption: 900 W

OPTICS

- Beam aperture : 4.5 ° to 50 °
- 170 mm frontal lens

LIGHT SOURCE

- LED:
 - White LED 650 W 7000 K±450 K Colour Temperature, high CRI @ EURUS TC
 - White LED 650 W 8200 K ±500 K Colour Temperature @ EURUS S
- Extremely long Life: < 40,000 H

MOVEMENT

- Pan and tilt automatic repositioning
- Range: Infinite pan and tilt rotation (16 bits)

- Pan movement : 540 °(16 bit)
- Tilt movement : 266 ° (16 bit)

COLOURS

- Sophisticated colour mix system providing CMY colour mixing
- Variable CTO colour temperature correction
- Fixed colour wheel with seven complementary colours
- 2 CRI improvement filters

GOBOS

- Indexable rotating gobo wheels with 7 high-precision glass gobos, plus open position
- Adjustable-speed rotating gobo in both directions
- Fixed gobo wheel with 11 high-precision glass gobos, plus open position

FRAMING SYSTEM

- 4 individually shutter blades
- Rotation of the module: +/- 60 °

IRIS DIAPHRAGM

- 15-blade iris diaphragm
- Range: 15% to 100% open

FROST

- 2 frost filters: one light, one heavy

PRISMS

- 2 prism: 5-facet circular, 4-facet linear

EFFECTS

- Focusable graphic animation effect-wheel
- Continuous rotation in both directions

DIMMER / STROBE

- Electronic dimmer from 0 to 100%
- Strobe effect: 1 to 25 flashes per second

HARDWARE FEATURES

- Graphic LCD display with flip function
- Jog Wheel
- Integrated wireless LumenRadio™ receiver
- XLR 5 pin connectors
- Ethercon RJ45 IN / OUT connectors for ArtNet™ or sACN connection
- powerCON TRUE1 connectors

CONTROL

- DMX 512 protocol
- DMX-RDM compatible
- Stand-alone mode, local control panel
- 3 Control channel modes: 39/41/62 channels

COOLING SYSTEM

- Advanced liquid cooling system
- Selectable ventilation user modes
- Excess temperature protection

HOUSING

- Skeleton made of aluminium and steel metal plates
- Base in die-cast aluminium
- Heatsinks in aluminium and copper
- Moulded covers ABS PC (VO class)
- 2-side handles for transportation
- 4 heavy-duty feet
- IP20 protection rating

INSTALLATION

- 2 Omega ¼ turn brackets
- 8 ¼ turn mounting points
- Safety cable attachment point

OPERATING PARAMETERS

- Maximum permitted: 45°C (113°F)

- Minimum permitted: -10°C (14°F)
- Minimum usage distance: 2 m (6.56 ft)

COMPLIANCE

- CE, UKCA, ETL


SIZE

- Product: 445 x 743 x 273 mm (l x h x d)
- Foam: 655 x 590 x 555 mm (l x h x d)

WEIGHT


- Product: 32.9 kg

3. FIXTURE OVERVIEW

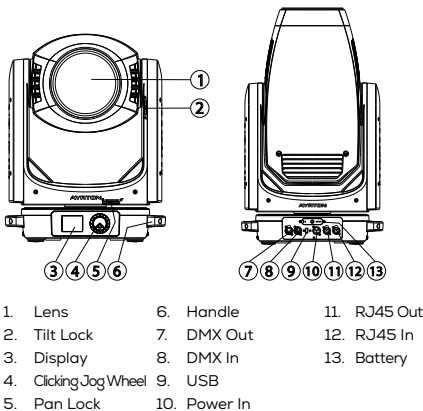


4. DRAWINGS

4.1 > FIXTURE DIMENSION

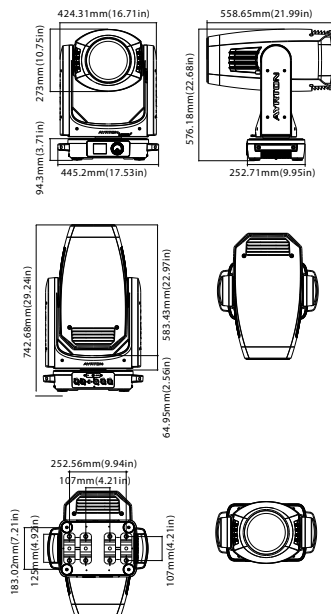

4.2 > COLOUR WHEEL

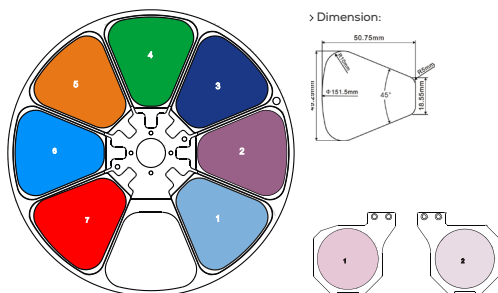


COLOUR WHEEL

1	CTB 1/4	GP603050331620
2	Magenta	GP603050330020
3	Congo Blue	GP603050330030
4	Green	GP603050330040
5	Orange	GP603050330050
6	Blue	GP603050330060
7	Red	GP603050330590

CTP Colour Filter Assembly

1	1/2 Minus Green	GP603050331640
2	1/4 Minus Green	GP603050331630

4.3 > ROTATING GOBO WHEEL

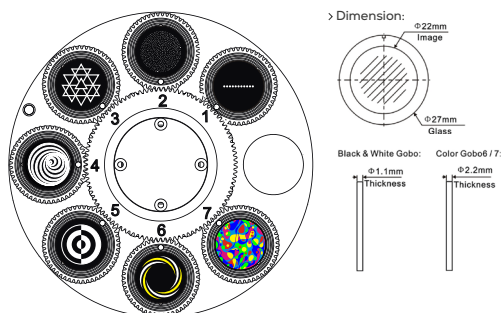


GOBO WHEEL 1

Rotating Gobo

1	130	Dot Line 11	GP60303011206
2	074	Star Dust	GP60303011209
3	018	Nested Triangle	GP60303011208
4	134	Vortex	GP60303011207
5	067	Black & White Target	GP60303011210

6	112Y	Nested Rings Yellow	GP60303060064
---	------	---------------------	---------------

7	042	CMY Liquid Effect	GP60303060131
---	-----	-------------------	---------------

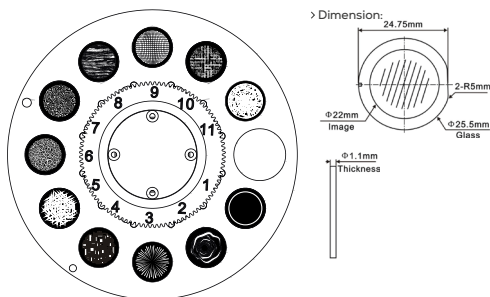


GOBO WHEEL 2

Static Gobo

1	410	Conical Tunnel Effect	GP60303011393A
2	049	Smoke Rings	GP60303011752
3	047	Fireworks	GP60303011753
4	066	Abstract Square	GP60303011754
5	081	Iron Filings	GP60303011755
6	041	Lost In The Brain	GP60303011756
7	101	Deep Forest	GP60303011757
8	105	Tree Bark	GP60303011758
9	190	Mirror Ball	GP60303011759
10	211	Digital	GP60303011760
11	242	Stained Glass	GP60303011761

4.4 > ANIMATION DIMENSION

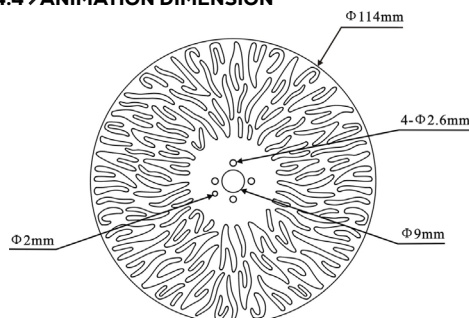

Scan the QR code on the cover page to download the related drawings.

5. INSTALLATION INSTRUCTIONS

5.1 > RIGGING THE DEVICE

CAUTION

Please consider the respective national norms during the installation. The installation must only be carried out by a qualified person.


- The applicable temperature for the lighting is between -10°C to 45°C. Do not use the lighting under or above the temperature.
- The installation of the support structure has to be built and constructed in a way that it can hold 10 times the weight for 1 hour without any harming deformation.
- The installation must always be secured with a secondary safety attachment, e.g. an appropriate safety rope.
- Never stand directly below the device when mounting, removing or servicing the fixture.
- The operator has to make sure the safety relating and machine technical installations are approved by an expert before taking the device into operation for the first time.
- These installations have to be approved by a skilled person once a year.
- Overhead mounting requires extensive experience, including amongst others calculating working load limits, installation material being used, and periodic safety inspection of all installation material and the device. If you lack these qualifications, do not attempt the installation yourself. Improper installation can result in bodily injury.

5.2 > RIGGING USING THE OMEGA BRACKETS

CAUTION

This step is very important to ensure safe rigging of the fixture.

- Fix the clamp to the bracket by tightening the M12 nut and bolt to the bracket through the $\Phi 13$ hole in the middle of the bracket.
- Insert the quick-lock fasteners of the first Omega holder into the respective holes on the bottom of the device. Tighten the quick lock fasteners fully clockwise.
- Install the second Omega holder.
- Pull the safety cable through the holes on the bottom of the base and over the trussing system or another suitable rigging point. Insert the end into the carabiner and tighten the safety screw.




1. Omega bracket
2. Clamp
3. Safety rope
4. Quick-lock fastener

5.3 > RIGGING DRAWINGS

CAUTION


Overhead rigging requires extensive experience, including (but not limited to) calculating working load limits, specifying installation/rigging materials, and periodic safety inspection of all installation material as well as the device. If you lack these qualifications, do not attempt the rigging of this device yourself. Improper installation/rigging can result in serious bodily injury.



- Be sure this fixture is kept at least 0.1 m away from any flammable materials (decoration etc.).
- Always use and install a safety cable as a safety measure to prevent accidental damage and/or injury in the event the clamp fails.


6. DMX-512 CONTROL CONNECTION

Connect the male side of the XLR cable to the female XLR output of your controller and the female side of the XLR cable to the male XLR input of the device. You can connect multiple devices together in a serial fashion. The cable needed should be two core, screened cable with XLR input and output connectors. Please refer to the diagram below.



7. DMX-512 CONNECTION WITH DMX TERMINATOR

For installations where the DMX cable has to run over a long distance or is in an electrically noisy environment, such as in a discotheque, it is recommended to use a DMX terminator. This helps in preventing corruption of the digital control signal caused by electrical noise. The DMX terminator is an XLR plug with a 120 Ω resistor connected between pins 2 and 3, which is then plugged into the output (female) XLR socket of the last fixture in the chain. Please see illustrations below.

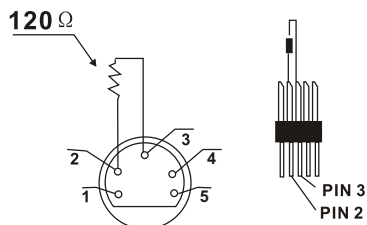

8. DEVICE DMX START ADDRESS SELECTION

All fixtures should be given a DMX starting address when using a DMX signal, so that the correct fixture responds to the correct control signals. This digital starting address is the channel number from which the fixture starts to "listen" to the digital control information sent out from the DMX controller. The allocation of this starting address is achieved by setting the correct address number on the display located on the base of the device.

You can set the same starting address for all fixtures or a group of fixtures, or set different addresses for each fixture individually. If you set the same address on all devices, all the devices will start to "listen" to the same control signal from the same channel number. In other words, changing the settings of one channel will affect all the fixtures simultaneously.

If you set a different address, each unit will start to "listen" to the channel number you have set, based on the quantity of control channels of the unit. That means changing the settings of one channel will affect only the selected device.

In the case of the LED moving head, in 41 channel mode, you should set the starting address of the first unit to 1, the second unit to 42 (41 + 1), the third unit to 83 (41 + 42), and so on.

9. OPERATING INSTRUCTIONS OF THE INTERNAL DMX WIRELESS SYSTEM

9.1 › EQUIPMENTS

This product is equipped with a Lumen radio Timo DMX receiver.

9.2 › MESSAGE FROM THE LED INDICATOR

- Solid Green: Logged on to a transmitter and actively receiving DMX data.
- Solid Red: Not logged on to any transmitter (available) or not receiving DMX data.

9.3 › WDMX IN THE MENU OF THE FIXTURE

In the sub menu Wireless DMX, you'll find the option "Rest WDMX." Selecting this will disconnect the fixture from its current transmitter.

9.4 › SET UP THE WIRELESS SYSTEM

To connect the fixture to a transmitter, the transmitter must be in pairing mode.

You can activate this mode by selecting "Rest WDMX" from the fixture's menu or by performing a factory reset on the fixture.

Once the transmitter is ready, press its pairing button to link the devices.

Important Notes:

- *After each job, please log out all receivers from the transmitter. This ensures the receivers return to an unassigned state and are ready for future pairings.*
- *Do not connect a fixture that is wirelessly linked to a transmitter to a DMX controller via cable. Doing so may cause signal interference.*


10. DISPLAY

- The Displayway offers Jog Wheel features: you can set the starting address, run the pre-programmed program or reset the device.
- The main menu is accessed by double clicking the Jog Wheel of Jog Wheel until the display starts flashing. Browse through the menu by turning Jog Wheel clockwise or counterclockwise.
- Press the Jog Wheel for 2 seconds in order to select the desired menu or exit menu, double click the Jog Wheel for confirm. After accessing the edit mode, the unit will automatically exit to the

main menu after 15 seconds from the last button press. Clockwise is positive direction while counterclockwise is opposite direction.

- When the unit is powered on, if no data signal is connected after 1 minute, then the display will switch off automatically. The Display does not need external power to operate in case there is battery hold down the Jog Wheel for 6 seconds and the Display will turn on by using the unit's battery.

PS: No response when quick press the Jog Wheel.



To install the battery for the first time, please make sure the unit is not connected to AC power. Install the battery in the battery holder, then remove the battery and install it back. This procedure must be done only for the first battery installation.

DEFAULT SETTINGS SHADED - V223

Address			
Address	Set DMX Addr: A001-AXXX Decimal Universe: XXXXX Net: XX Sub-Net: X Universe: X Signal: DMX/WDMX/Art-Net/sACN		DMX Address setting
Mode			
User Mode	Stand Mode Basic Mode Extended Mode User Mode A User Mode B User Mode C		User's mode to change channel numbers
Mode			
Edit User ModeA	Max channel PAN		Preset User modes A,B,C
Options			
Status	No DMX Mode Pan Reverse Tilt Reverse Pan Degree Feedback Init PAN Init TILT Reset Mode Pan/Tilt Spd CMY Spd Zoom/Focus Spd Framing Mode Hibernation DMX Output	Close/Hold/Auto ON/OFF ON/OFF 630/360 ON/OFF ON/OFF ON/OFF Fast/All Rot Gobos Medium/Fast/Slow/FS Mode Slow/Medium/Fast Fast/Medium/Slow Constant OFF/Constant ON OFF 01M-99M ON/OFF	Auto run if no DMX Pan Reverse movement Tilt Reverse movement Pan Degree Select Movement Feedback Init PAN Init TILT Reset Mode Pan/Tilt Spd CMY Spd Movement Speed Framing Mode Stand by Mode DMX Output
Service PIN	Service PIN Set IP Set Mask IP DHCP Cross Load SW USB Update Clr LED Info	Password = XXX xxx.xxx.xxx.xxx xxx.xxx.xxx.xxx ON/OFF ON/OFF ON/OFF ON/OFF	Service Password="050" Set IP Set IP Mask DHCP Cross Load SW USB Update Clear the LED Info
Fans Control	Fans Speed Constant Fans	Auto Stage Silence Super Silence ON/OFF	Fans Speed select Constant Fans

Options			
Disp.Setting	Shutoff Time	02-60m 05m	Display shutoff time
	Flip Display	ON/OFF	Reverse 180 degree
	Key Lock	ON/OFF	Key Lock
	DispFlash	ON/OFF	DispFlash
Temp. C/F	Celsius		Temperature switch between °C / °F
	Fahrenheit		
Initial Pos.	PAN = XXX		Initial effect position
Wireless DMX	Activate WDMX		Activate WDMX
	Rest WDMX		Rest WDMX
Dim Curve	Square Law		
	Linear		
Refresh Select	12K		Refresh Select
	2.4 K		
	16 K		
	25 K		
Gobo Correction	ON/OFF		Gobo Correction
Reset P/T Fade	ON/OFF		Reset P/T Fade
Frost (Progressive)	ON/OFF		Frost
Silence Movement	ON/OFF		Silence Movement
Trigger	DMX Value Disp. Set to Follower	PAN..... Follower 1, Follower 2, Follower 3 Leader/Alone	DMX Value Disp. Set to Follower
	Auto Program		Auto Program
	Reset Default	ON/OFF	
Reset User Set	Address	DMX address: 001-XXX Decimal Universe: XXXXX Net: XX Sub-Net: X Universe: X Signal: DMX/WDMX/Art-Net/sACN	
	Mode	Stand Mode Basic Mode Extend Mode User Mode A User Mode B User Mode C	
	Fan Speed	Auto Stage Silence Super Silence	
	Constant Fans	ON/OFF	
Info			
Time Info.	Current Time		XXXX(Hours)
	Ttl Life Hrs		XXXX(Hours)
	Last Run Hrs		XXXX(Hours)
	LED Hours		XXXX(Hours)
	Timer PIN		Password = XXX
	Clr Last Run		ON/OFF
Temp. Info	H:XXX °C / °F B:XXX °C / °F		
Fan Info	xxxRPM		
Software Ver	V1.0		Software version
Network	IP, Mask, Mac		
Error Info	Error Record 1		
	:		

Test		
Home	All Pan&Tilt Colour Gobo Other	All Pan&Tilt Colour Gobo Other
Test Channel	PAN ____	Test function
Manual Ctrl.	PAN =XXX :	Fine adjustment of the lamp
Calibration	-Password- PAN :	Password "050" Calbrate and adjust the effects to standard/right position
GoboFocus Comp	Service PIN RotGoboSingle FixGoboSingle	Password "050"
Gobo Replace	Gobo Wheel 1 Gobo Wheel 2	Gobo Replace
Preset		
Select Prog.	Prog. Part 1 = Program 1 ~ 10 Program 1 Prog. Part 2 = Program 1 ~ 10 Program 2 Prog. Part 3 = Program 1 ~ 10 Program 3	Select programs to be run
Edit Prog.	Program 1 : Program 10	Program Test Step 01=SCxxx Step 64=SCxxx
Program 10		Testing program Program in loop Save and exit
Preset		
Edit Scenes	Edit Scene 001 ~ Edit Scene 250	Pan,Tilt,____ --Fade Time-- --Scene Time-- Input By Outside
Scenes Input	XX--XX	

9.1 › ADDRESS

9.1.1. Address

With this function, you can adjust the DMX address, the Universe and the selection of the control signal.

9.2 › MODE

9.2.1. User Mode

With this function, you can choose user defined channel orders.

9.2.2. Edit User Mode

With this function, you can edit user defined channel orders of User Mode A/B/C.

9.3 › OPTIONS

9.3.1. Status

No DMX Status

With this function, you can choose the unit behavior in case no signal is detected between Close (all dmX value to 0), Hold (keep the last dmX value), and Auto (start auto mode).

Pan Reverse

With this function you can reverse the Pan-movement.

Tilt Reverse

With this function, you can reverse the Tilt-movement.

Pan Degree

With this function, you can select the total Pan degree range between 630 and 540.

Feedback

This function allows you to activate or deactivate the automatic repositioning of the Pan & Tilt in case of an accidental/manual move of the yoke.

Init PAN

This function allows you to deactivate the Pan movement.

Init TILT

This function allows you to deactivate the Tilt movement.

Reset Mode

This function allows you to choose the reset process for the gobo.

- Fast : The fixture only check the direction of the first gobo.
- All Rot Gobo : The fixture is checking all the position of each gobo to make sure all the gobo are in the same position (Useful if using a custom Gobo).

Pan/Tilt Spd

This function allows you to select the Pan and Tilt speed from four options: Fast, Medium, Slow and FS Mode.

- FS Mode : Enhanced Responsiveness – Acceleration and deceleration are highly reactive to improve tracking performance.

CMY Spd

With this function, you can select CMY speed from "Fast", "Medium" and "Slow".

Zoom/Focus Spd

With this function, you can select Zoom/Focus speed from "Fast", "Medium" and "Slow".

Framing Mode

This feature controls the dimmer's behaviour when using the blades or iris, preventing heat-related distortion during extended use.

- Constant OFF: The light remains on for a set duration before dimming to protect the fixture.
- Constant ON: The light dims instantly when the blade/iris is in use, ensuring stable output power over time.

Hibernation

The device and stepper motors will be powered off if the unit stays without DMX signal for the User defined times (in Minutes). The fixture will perform a reset sequence once DMX is back.

DMX Output

With this function, the unit can transmit the signal received via WDMX or ArtNet/sACN through the DMX output.

9.3.2. Service PIN

Password

The Password for this function is "050".

Set IP

This function allows you to set the IP of the Unit.

Set IP Mask

This function allows you to set the IP Mask of the Unit.

DHCP

This function allows you to enable or disable the DHCP

Cross Load SW

This function allows you to upload the current SW version to other units using a DMX connection. Do not disconnect the units before the process is complete.

USB Update

Allows you to update the fixture's firmware by connecting a USB drive to the rear panel USB port.

Clr Error Info

This function allows you to clear the error info list.

9.3.3. Fans Control

Fans Speed

With this function, you can set the fans speed. Settings are Auto, Stage, Silence, and Super Silence.

- Auto: The LED module delivers **high** output and the fans ramp up and down depending on the ambient temperature and the temperature of the LED module itself.
- Stage: The LED module delivers **full** output and the fans remain at full speed regardless of the temperature of the LED module.
- Silence: The LED module is limited to **medium** output and the fans rotate at a slower speed.
- Super Silence: The LED module is limited to a **lower** output and the fans rotate at the slowest speed.

For specific output details, refer to photometry document.

Constant Fans

Enables you to set the fans to run continuously, even when the LED is off.

9.3.4. Disp. Setting

Shut off Time

With this function, you can select the delay before the LCD display turns off. Choose between 2 to 60 minutes. The default is 5 minutes.

Flip Display

With this function you can rotate the display by 180° (when the unit is rigged).

Key Lock

With this function you can activate the automatic key lock function. If this function is activated, the keys will be locked automatically after exiting the edit mode for 15 seconds. Keeping press the <MODE/ESC> key for 3 seconds if you do not need this function.

DispFlash

With this function activated, display will flash if no signal is detected.

9.3.5. Temperature C/F

With this function you can display the temperature in Celsius or Fahrenheit.

9.3.6. Initial Pos.


With this function you can display initial effect position.

9.3.7. Wireless

From factory, this projector is prepared for wireless data transmission (W-DMX). If you wish to de-activate W-DMX control, you can select the function "activate WDMX" by turning the encoder. With the function "Rest WDMX", you can log out the projector from the wireless sender.

9.3.8. Dim Curve

With this function you can select the Dimmer Curve.



9.3.9. Refresh Select

With this function you can select the PWM rate.

- 1.2 K & 2.4 K : provides superior dimming quality, especially for smooth fadeouts at lower levels.

- 16 K & 25 K : are ideal for broadcast use.

9.3.10. Gobo Correction

This function allows you to enable or disable the Gobo Correction, The Unit will automatically insert a correction filter when a glass gobo is inserted.

9.3.11. Reset P/T Fade

This function allows you to choose the reset speed of the pan/tilt motors to avoid fast movement

9.3.12. Frost Progressive

This function allows you to enable or disable the progressive insertion of the frost.

9.3.13. Silence Movement

This function allows you to activate the silent movement, Pan / Tilt / Focus / CMY speed are reduced to limit the mechanical noise.

9.3.14. Trigger

DMX Value Disp.

With this function you can display the DMX 512 value of each channel. The display automatically shows the channel with a value changing.

Set to Follower

With this function, you can define the device as follower.

Auto Program

With this function, you can run the internal program. You can select the desired program under "**Select program**". You can set the number of steps under "**Edit program**". You can edit the individual scenes under "**Edit scenes**". With this function, you can run the individual scenes either automatically, i.e. with the adjusted Step-Time.

9.3.15. Reset Default

With this function, you can select restore factory set for ON or OFF. the default is OFF.

9.3.16. Reset User Set

With this function, you can define the following "restore user" values :

- Address
- Mode
- Fans Speed
- Constant Fans

9.4 › INFO

9.4.1. Time Info.

Current Time

With this function, you can display the temporary running time of the device from the last power on. The display shows "XXXX". "XXXX" stands for the number of hours. The counter is reset after turning the device off.

Ttl Life Hrs

With this function, you can display the running time of the device. The display shows "XXXX". "XXXX" stands for the number of hours.

Last Run Hrs

With this function, you can display last the running time of the device. The display shows "XXXX". "XXXX" stands for the number of hours.

LED Hours

With this function, you can display the time of LED. The display shows "XXXX". "XXXX" stands for the time of LED.

Timer PIN

With this function, you can display the timer password.

Clr Last Run

With this function, you can clear last run time of the fixture. The display shows "ON" or "OFF". Press "Enter" to confirm.

9.4.2. Temp.Info

With this function you can display the different temperature of the HeadTemp.

9.4.3. Fan Info

With this function, you can display all the fan speed values available in the unit.

9.4.4. Software Ver

With this function, you can display the software version of the device.

9.4.5. Network

With this function, you can display the Network information.

9.4.6. Error Info.

With this function you can Read the error record of the Unit

9.5 › TEST

9.5.1. Home

With this function you can reset the device. You can select which functions you want to reset by using the submenu.

9.5.2. Test Channel

With this function you can test each channel's function to ensure correct operation.

9.5.3. Manual Control

Allows you to manually control each feature of the unit

9.5.4. Calibration

With this function, you can calibrate and adjust the effect wheels to their correct positions. The password of calibrate values is 050.

9.5.5. GoboFocus Comp

This function allows you to calibrate the Gobo compensation for each gobo individually. This is useful to make all the gobo on the same wheel sharp with the same DMX value.

9.5.6. Gobo Replace

This function allows you to select the gobo you want to replace. The chosen gobo will be rotated into position, making it easy to swap out.

9.6 › PRESET

Run the auto program: A leader fixture can output to three different program signals to the follower fixture to operate. It means the host will send cyclically in the following orders (The host will keep operating the program of Part 1). Then the follower fixture will make the selectively receiving according to its own set.



- If the follower fixture chooses Run For Follower 1 from the menu of 1-3, then it will receive the part 1's automatic program from link, in the same way, when the follower fixture chooses Run For Follower 2, then it will receive the part 2's automatic program from link.
- Enter the menu of 1-3 Function Mode---Set To Follower. Here to set machine operate which part of the program during the host-follower connection
- Enter the menu of 1-4, 1-5 Function Mode---Set To Leader
- Enter the menu of 8-1 Edit Program---Auto Program Part1. The host outputs three groups driven program---Part1, Part2, Part3 (Part1 program runs the same effect as the host)
- Enter the menu of 8-2 Edit Program---Edit Program. Edit the program's connection, connect the scene in order
- The editor of the scene, there are as many as 250 scenario editors, and every scene can have a program connection of 10.

Note:

Part 2, Part 3 repeat in accordance with the Part1's repeat. For example: When Part 1 uses Program 2, Part 2 uses Program 4, Part 3 uses Program 6, Assume: Program 2 includes scene of 10, 11, 12, 13. Program 4 includes scene of 8, 9, 10; Program 6 includes scene of 12, 13, 14, 15. Then it will run as below.

9.7 › SHORTCUT MENU

9.7.1. Flip display

With this function you can rotate the display by 180° (when the unit is rigged)

9.7.2. Restore Factory

With this function, you can restore default setting (highlighted value in the above chart).

9.7.3. Restore User

With this function, you can restore User settings (Setting can be edit under Options/Reset User Set).

9.7.4. Rst DMX addr 1

With this function you can only set the address to 1.

11. DMX PROTOCOL

Scan the QR code on the cover page to download the DMX CHART.

12. ERROR MESSAGES

When you turn on the device, it will first perform a reset. The display may show "Err channel is XX" should there be problems with one or more functions. "XX" stands for channel 1, 2, 3, 4, 5, 6 etc whose sensor has encountered a problem. For example, when the display shows "Err channel is Pan movement", it means there is an error on channel 1. If there are errors on channel 1, channel 3, channel 6 at the same time, you may see the error message, "Err channel is Pan movement", "Err channel is Tilt movement", "Err channel is Shutter", flash twice, and then the device will generate a second reset. If the error messages persist after performing a reset more than twice, the channels which have errors may not work properly however, all other functions can work as usual. Please contact your dealer or manufacturer for service. Self repair is not allowed.

PAN- movement Error

(PAN- yoke movement error) This message will appear after the reset of the fixture if the yoke's magnetic-indexing circuit malfunction (Optical Sensor or Magnetic Sensor fails) or the stepper

motor is defective (or its driving IC on the main PCB). The PAN-movement is not located in the default position after the reset.

TILT- movement Er

(TILT- head movement error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions ((Optical Sensor or Magnetic Sensor fails)) or the stepper motor is defective (or its driving IC on the main PCB). The TILT-movement is not located in the default position after the reset.

Zoom wheel Er

(Zoom wheel error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (Optical Sensor or Magnetic Sensor fails) or the stepper motor is defective (or its driving IC on the main PCB). The Zoom -movement is not located in the default position after the reset.

Focus wheel Er

(Focus wheel error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (Optical Sensor or Magnetic Sensor fails) or the stepper motor is defective (or its driving IC on the main PCB). The Focus -movement is not located in the default position after the reset.

Colour wheel Er

(Colour wheel- error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB). The Colour - movement is not located in the default position after the reset.

Cyan Colour wheel Er

(Cyan Colour wheel- error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB). The CMY -movement is not located in the default position after the reset.

Magenta Colour wheel Er

(Magenta Colour wheel- error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB). The CMY -movement is not located in the default position after the reset.

Yellow Colour wheel Er

(Yellow Colour wheel- error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB). The CMY -movement is not located in the default position after the reset.

CTO wheel Er

(CTO Colour wheel- error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB). The CTO -movement is not located in the default position after the reset.

Rot_Gobo1 wheel Er

(Rot_Gobo1wheel - error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB). The Rot_Gobo1 - movement is not located in the default position after the reset.

Rot_Gobo2 wheel Er

(Rot_Gobo2wheel - error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective

(or its driving IC on the main PCB). The Rot_Gobo2 - movement is not located in the default position after the reset.

Animation wheel Er

(Animation wheel - error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB). The Animation - movement is not located in the default position after the reset.

Iris wheel Er

(Iris wheel - error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB). The Iris - movement is not located in the default position after the reset.

Prism_5 wheel Er

(Prism wheel- error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB). The Prism _5 - movement is not located in the default position after the reset.

Linear Prism wheel Er

(Linear Prism wheel- error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB). The Linear Prism - movement is not located in the default position after the reset.

Frost 1 wheel Er

(Frost 1 wheel - error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB). The Frost 1 - movement is not located in the default position after the reset.

Frost 2 wheel Er

(Frost 2 wheel - error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB). The Frost 2 - movement is not located in the default position after the reset.

Blade 1 wheel Er

(Blade 1 wheel- error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB). The Blade 1 - movement is not located in the default position after the reset.

Blade 1_Rot wheel Er

(Blade 1_Rot wheel- error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB). The Blade 1_Rot - movement is not located in the default position after the reset.

Blade 2 wheel Er

(Blade 2 wheel- error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB). The Blade 2 - movement is not located in the default position after the reset.

Blade 2_Rot wheel Er

(Blade 2_Rot wheel- error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective

(or its driving IC on the main PCB). The Blade 2_Rot - movement is not located in the default position after the reset.

Blade 3 wheel Er

(Blade 3 wheel- error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB). The Blade 3 - movement is not located in the default position after the reset.

Blade 3_Rot wheel Er

(Blade 3_Rot wheel- error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB). The Blade 3_Rot - movement is not located in the default position after the reset.

Blade 4 wheel Er

(Blade 4 wheel- error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB). The Blade 4 - movement is not located in the default position after the reset.

Blade 4_Rot wheel Er

(Blade 4_Rot wheel- error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB). The Blade 4_Rot - movement is not located in the default position after the reset.

All_Blade _Rot wheel Er

(All_Blade _Rot wheel - error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB).The All_Blade _Rot - movement is not located in the default position after the reset.

Animation_Rot wheel Er

(Animation_Rot wheel - error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB).The Animation_Rot - movement is not located in the default position after the reset.

13. CLEANING AND MAINTENANCE

The following points have to be considered during inspection:

- *All screws for installing the devices or parts of the device have to be tightly connected and must not be corroded.*
- *There must not be any deformations to the housing, lenses, rigging and installation points (ceiling, suspension, trussing).*
- *Motorized parts must not show any signs of wear and must move smoothly without issue.*
- *The power supply cables must not show any damage, material fatigue or sediment.*

Further instructions depending on the installation location and usage have to be adhered to by a qualified installer and any safety concerns have to be removed.

CAUTION



Disconnect from mains before starting maintenance operation

In order to ensure the device remains in good condition and does not fail prematurely, we suggest regular maintenance.

- Clean the inside and outside lens each week to avoid loss of output due to accumulation of dust/ dirt on the lens.

- Clean the fans each week to ensure maximum airflow and efficient thermal cooling. This will ensure the light source is operated in the best possible condition.
- A detailed electrical check by an approved electrician every quarter to make sure that the circuit contacts are in good condition. This will prevent poor circuit contacts and the resultant overheating.

We recommend frequent cleaning of the device. Please use a moist, lint- free cloth. Never use alcohol or solvents.

Please refer to the instructions under "Installation instructions".

Should you need any spare parts, please order genuine parts from your local dealer.

