

ORKIS

HCR^{TECHNOLOGY}



ORKIS FRESNEL/PEBBLE

HIGH QUALITY WHITE AND COLORED LIGHT,
SILENT OPERATION AND VERSATILITY AT YOUR SERVICE

The Orkis is ADB's new color LED fresnel or pebble luminaire, which brings the modernity of innovative technology to the stage in a simple, versatile, heavy duty unit.

Its CRI remains stable at values of at least 97 thanks to a modern 6-color LED system and advanced software. The Orkis's performance really comes into its own in color production: the color range obtainable is very wide, and every shade can truly be achieved. It faithfully reproduces the behaviour of a halogen light, making it compatible with various different light sources.

The Orkis is also an extraordinary variable white LED unit, from 8000K to 2500K: the white light it produces is extremely pure since it combines six colors, and the CRI is unaltered when the color temperature changes.

Its flexibility of use is remarkable: the fresnel version produces a flood light up to an angle of 87° (field angle), or a spot light with an angle of 15° (beam angle). Variation is continuous, smooth and linear within this range.

Alternatively, the Orkis can be modified into a Pebble luminaire, by changing the lens with the related accessory or vice-versa.

Modern, technologically advanced, versatile and extremely quiet, the Orkis can deliver high quality light in many applications: a complete solution for your rig.



ELECTRICAL

Power Supply: 90 - 260 V 50/60 Hz

OPTICAL

Light source: 6-Color LED (Red, Green, Blue, Amber, Cyan, Lime)

CRI: 97 at any color temperature

Color temperature range: 2500K - 8000K

Motorized zoom

Fresnel lens:

- Beam angle: 15° to 54°
- Field angle: 22° to 87°

Pebble lens:

- Beam angle: 15° to 56°
- Field angle: 26° to 80°

CONTROL

Control modes: DMX 512, RDM, ArtNET

W-DMX wireless control version available

Local control: Zoom, Intensity, CTO, Green-Magenta adjustment

16-bit ultra-smooth dimming

IHM: color touch-screen & 3 push encoders

Color control modes: Hue Saturation, RGB, CMY

PHYSICAL

Aluminium & metal die-cast housing

Color: black

Noise level (standard mode): 24dB(A) @ 1 m

Standard accessories:

- Metal filter frame 215 x 215 mm
- Neutrik PowerCON TRUE1 1.5 m power cable, bare ends

Optional accessories:

- 8 leaves barndoors 215 x 215 mm

WEIGHT

11 Kg (Pebble M) – 13 Kg (Fresnel M)

PHOTOMETRY

Fresnel Lens 3200K

Narrow 2375 lux @ 5m

Wide 305 lux @ 5m

Pebble Lens 3200K



Narrow 1668 lux @ 5m

Wide 280 lux @ 5m



DIMENSIONS

Orkis Pebble M

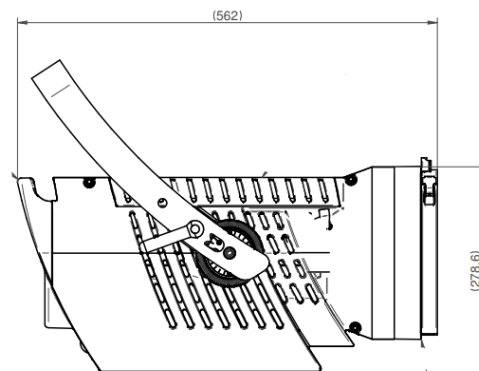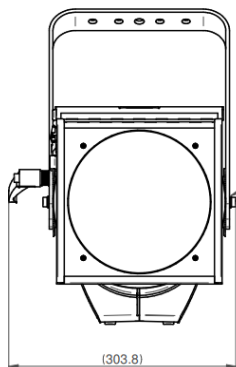

Orkis Fresnel M

