INSTRUCTIONS

GEK-36508

DC POWER SUPPLY

DRAWING NO. 44A372870-002

SPECIFICATIONS

Model:	Power/Mate Model RC-9
Input:	105-125 VAC, 47-420 CPS
Output:	7 to 11 volts, 1 amp
Regulation:	Line ±0.1% Load ±0.3%
Operating Ambient Temperature:	-20° to +71°C
Output Adjustment:	By means of internal pot

COMPONENT	Power/Mate Part No.	COMPONENT	Power/Mate Part No.
C1	1100/34	Q4	2N3394
C2	0.005/75	R1	1.8K
C3	10/150	R2	5.6K
CR1	CER68	R3	1.2K
CR2	CER68	R4	270
CR3	CER68	R5	390
CR4	CER68	R6	500 VAR
CR5	1N751	R7	330
CR6	1N746	R8	2/3W
Q1	2N3055	R9	1K
Q2	2N3569	R10	3.9K
Q3	2N3394	P1	86RCP8
A20418-T1	13		


NOTE: 1) ALL RESISTORS ARE 1/2 WATT, 10% UNLESS NOTED.
2) CAPACITORS ARE LISTED AS MICROFARADS/VOLTS.

These instructions do not purport to cover all details or variations in equipment nor to provide for every possible contingency to be met in connection with installation, operation or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's purposes, the matter should be referred to General Electric Company.

Drive Systems Department • General Electric Company,

Waynesboro, Virginia 22980

GENERAL ELECTRIC

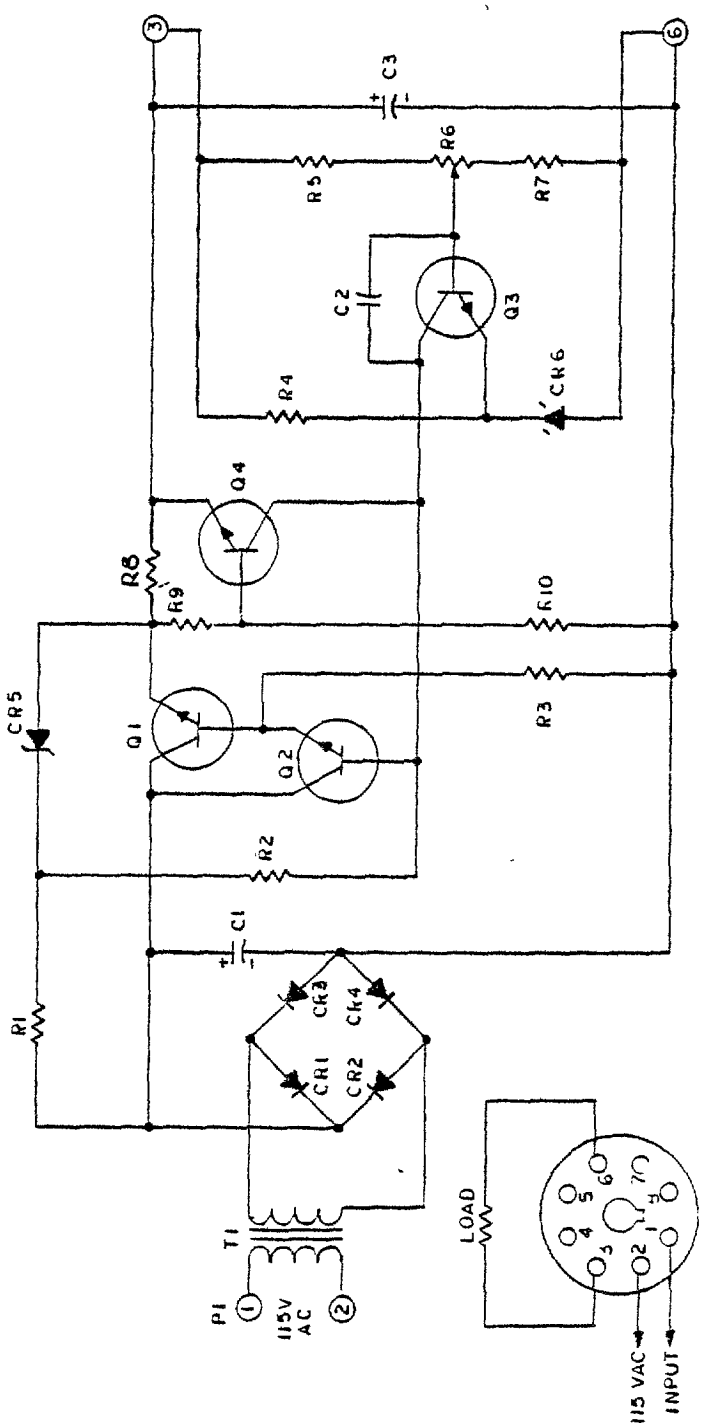

Model RC-9 - Elementary Diagram