




Print In Place Butt Hinge (Fusion 360 File Included)

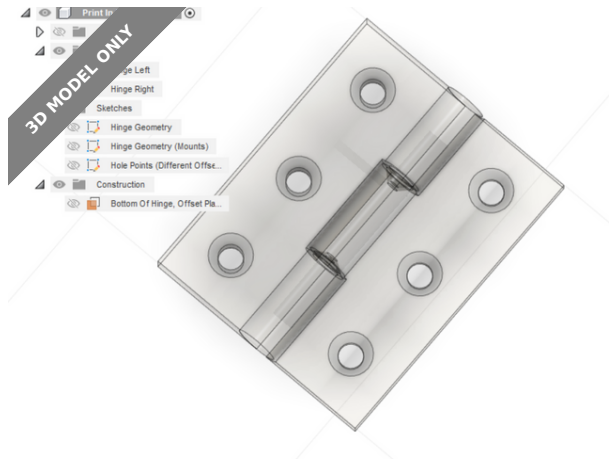

Andrew Nelson

[VIEW IN BROWSER](#)

updated 19. 5. 2023 | published 19. 5. 2023

Summary

Print in place (no support) Hinge, 40mm x 50mm

[Hobby & Makers](#) > [Mechanical Parts](#)

Tags: [hinge](#) [printinplace](#) [m4hinge](#) [butthinge](#)


General Info

- 3x M4 (countersunk) holes on each hinge side
- No supports needed
- 20.50mm on each side of the hinge

Models / Clearance


- 0.50MM_Print In Place Hinge.stl
 - Default is 0.50mm gap (should work on just about any printer).
- 0.25MM_Print In Place Hinge.stl
 - This has half the offset facing and hinge spacing as the 0.50mm model.

The slicing image below is an example comparing 0.25MM v 0.50MM gap for visualization

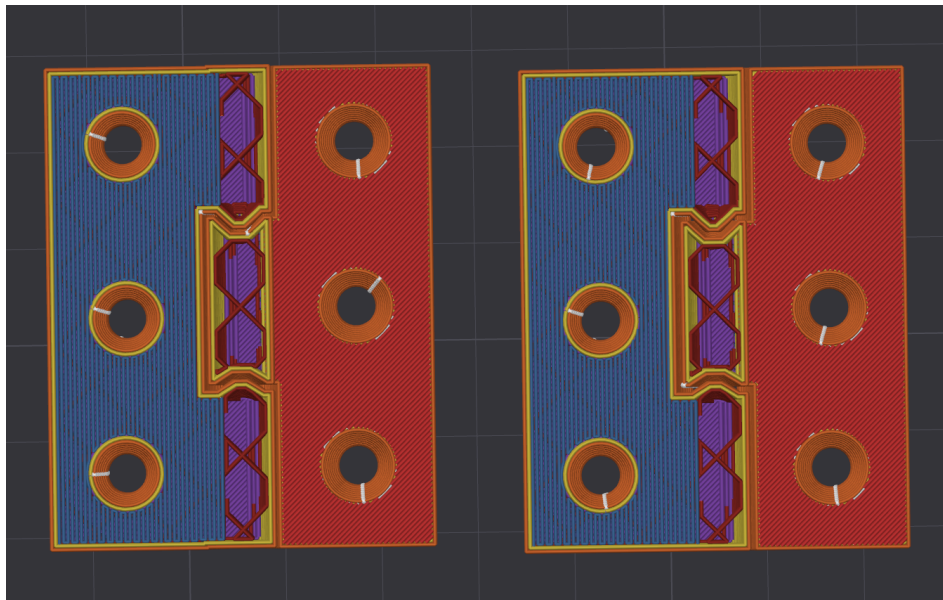

To Adjust Clearance (In Fusion 360)

- Open the .f3d file
- Open/Edit Hinge Geometry Sketch
- Edit the constraint (0.25mm in the example graphic below)
- Edit the face offsets (2) in the parametric timeline from 0.50m to 0.25mm (or other value)

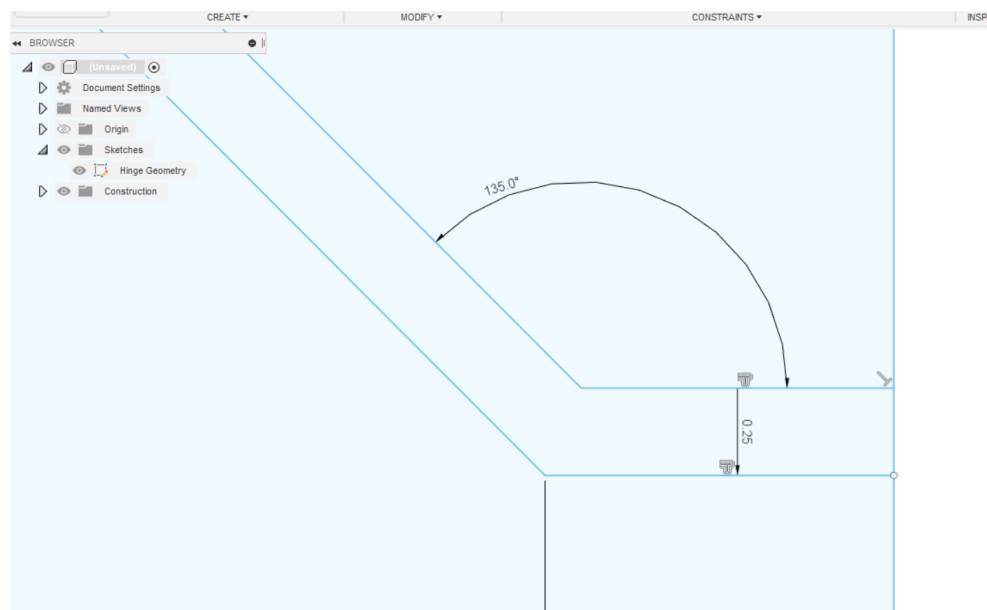


- Export everything as Mesh (stl) and print it

Model files



050mm_print-in-place-hinge.stl



print-in-place-hinge.f3d

☐ Fusion 360 File (to edit sketches, or change the hinge geometry)



025mm_print-in-place-hinge.stl

License

This work is licensed under a
[Creative Commons \(4.0 International License\)](https://creativecommons.org/licenses/by-sa/4.0/)



Attribution-ShareAlike

-
- ✗ | Sharing without ATTRIBUTION
 - ✓ | Remix Culture allowed
 - ✓ | Commercial Use
 - ✓ | Free Cultural Works
 - ✓ | Meets Open Definition