

# MIU-B30V-2

30,000 BTU AHU Indoor Unit

Job Name:

Reference:

Date:




| Item                              | Unit        | Specification         |
|-----------------------------------|-------------|-----------------------|
| Performance Data                  |             |                       |
| Cooling Capacity                  | Btu/hr      | 30000                 |
| Heating Capacity                  | Btu/hr      | 30000                 |
| Design Pressure                   | PSIG        | 550 / 340             |
| Refrigerant Type                  | -           | R454b                 |
| Liquid Side                       | inch(mm)    | 3/8" (9.52mm)         |
| Gas Side                          | inch(mm)    | 5/8" (15.9mm)         |
| Drain Pipe Size                   | inch(mm)    | 3/4" (19mm)           |
| Indoor Operation Range of Cooling | Deg.°F (°C) | 60°F~90°F (16°C~32°C) |
| Indoor Operation Range of Heating | Deg.°F (°C) | 32°F~86°F (0°C~30°C)  |

|                                   |           |                     |
|-----------------------------------|-----------|---------------------|
| Electrical                        |           |                     |
| Normal Operational Voltage        | V, Ph, Hz | 208/230V, 1Ph, 60Hz |
| Voltage Range                     | V         | 187-253             |
| Connection Wiring                 | -         | AWG 14/4            |
| MCA                               | A         | 6                   |
| Indoor Fan Motor Model            | -         | ZKFD-375-8-1-1      |
| Indoor Fan Motor Output           | W         | 375                 |
| Indoor Fan Motor RLA              | A         | 4.5                 |
| Indoor Fan Motor Speed (Hi/Mi/Lo) | r/min     | 900 / 700 / 500     |

|                                   |       |                             |
|-----------------------------------|-------|-----------------------------|
| Air Flow & Noise Level            |       |                             |
| Indoor Air Flow (H/M/L) (CFM)     | CFM   | 989 / 895 / 806 / 712 / 712 |
| Indoor Noise Flow (H/M/L) (dB(A)) | dB(A) | 44 / 44 / 41 / 26 / 26      |
| Dimension (W×D×H)                 | inch  | 21 × 17-1/2 × 45            |
|                                   | mm    | (534 × 445 × 1143)          |
| Package (W×D×H)                   | inch  | 26-1/2 × 20-7/8 × 48-5/8    |
|                                   | mm    | (675 × 530 × 1235)          |
| Net Weight / Gross Weight         | lbs   | 128 / 152                   |
|                                   | kg    | 57.8 / 68.8                 |

# Indoor Unit Dimensions

Unit: inch(mm)

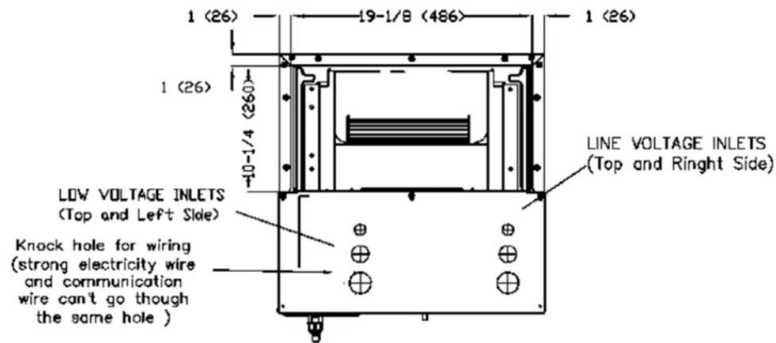

## DETAIL OF PIPING PLATE

