ROV obstacle-avoidance routes across five pool scenarios

Baseline | goal error: 0.0026 m

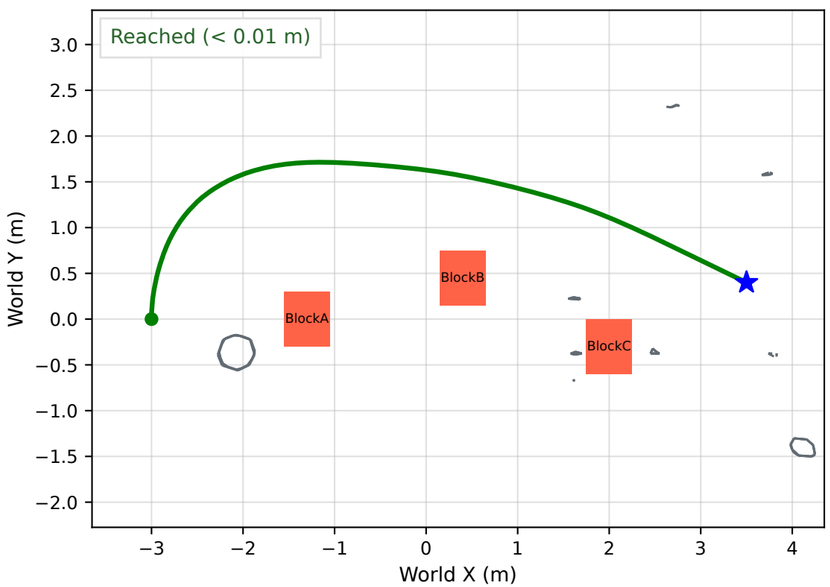

Slalom | goal error: 0.0017 m

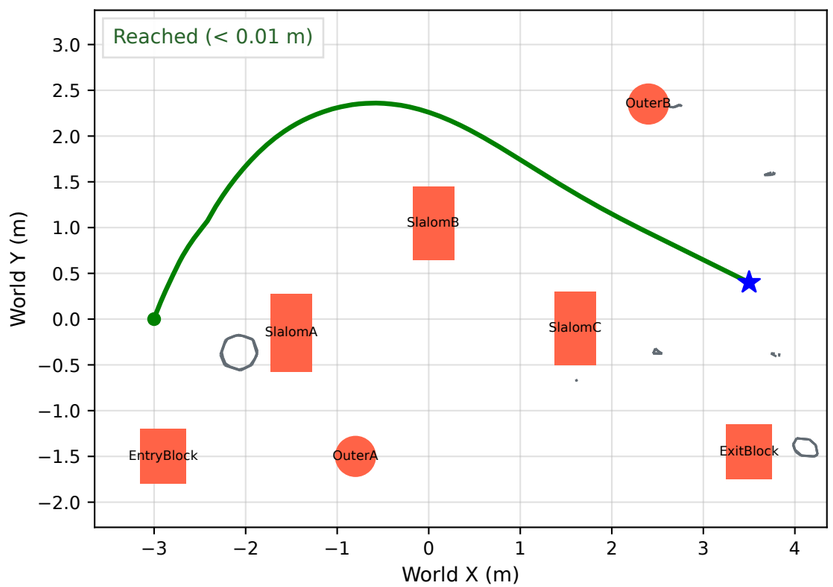

Gates (clearance corrected) | goal error: 0.0031 m

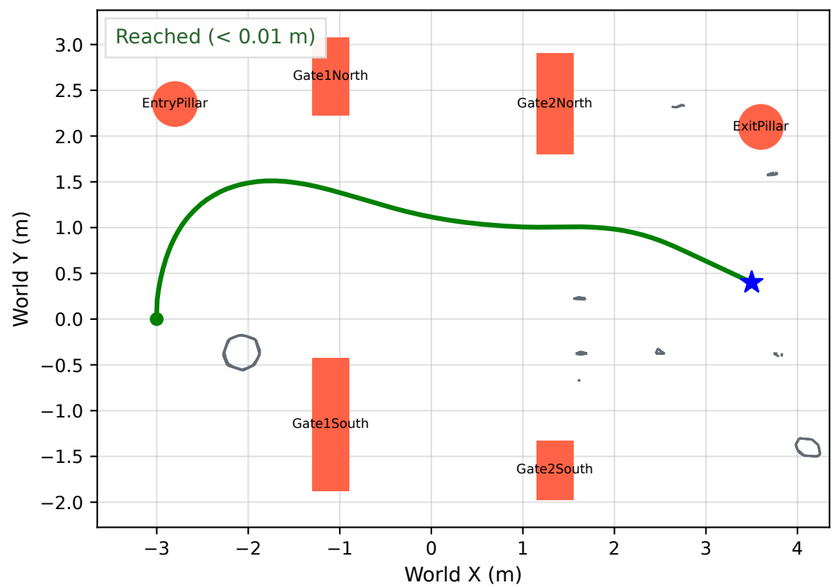

Pillar array | goal error: 0.0076 m

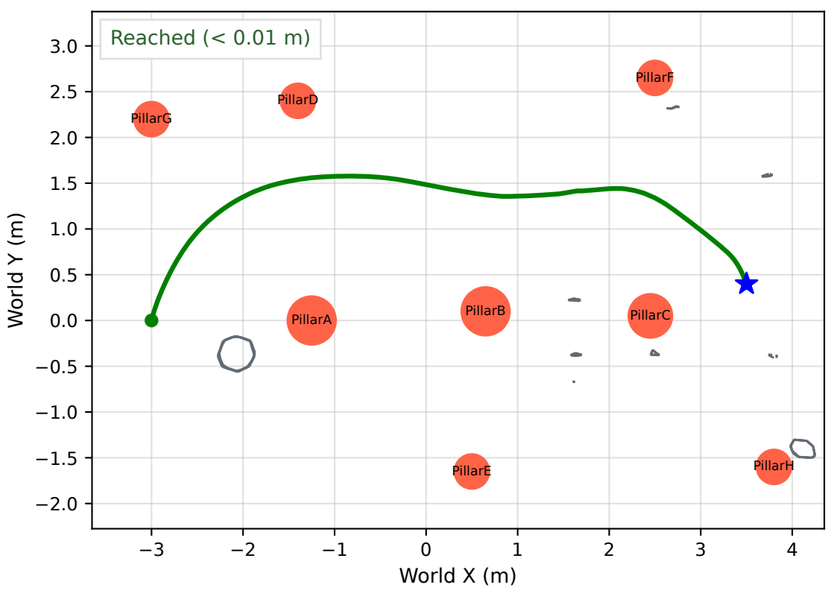

Mixed obstacles | goal error: 0.0028 m

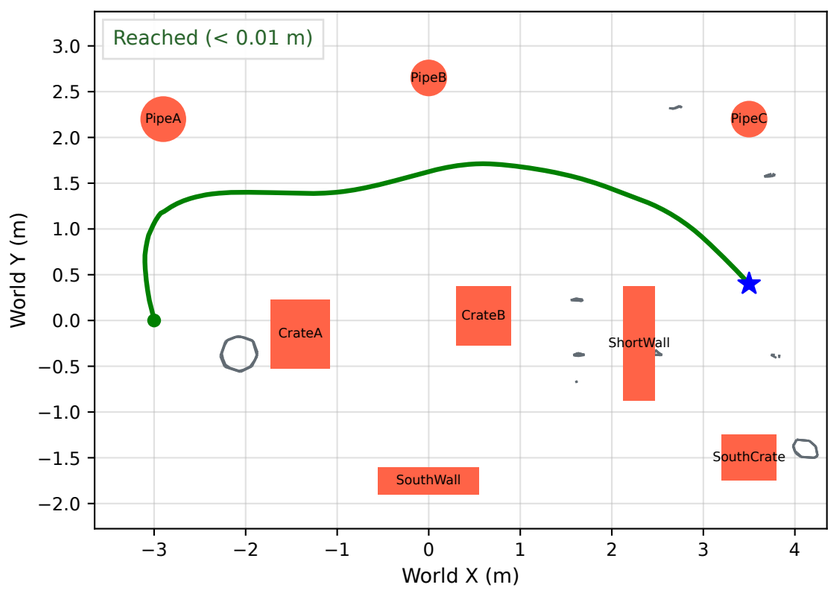

Executed ROV path
Start
Goal
Added obstacle footprint
Original pool structures
Final position: not reached

Measured trajectories from one test suite
Start: [-3.0, 0.0, 1.0] m
Goal: [3.5, 0.4, 1.0] m
Fixed reference height: z = 1.0 m
HFOV: 90 deg; depth stride: 1
Ideal depth + ground-truth odometry
Arrival tolerance: 0.01 m; dwell: 2 s
Simulation budget: 180 s per scenario
Gates: corrected opening clearance

Routes are plotted without smoothing
or extending them to the goal.