
SOORAJ RESIDENCE / CHOONDY

A warm, restrained tropical elevation

Plan-based massing study. West-facing front confirmed by the owner; roof falls toward the entrance.

FRONT COMPOSITION

Diagrammatic elevation: opening heights and roof levels are proposals, not dimensions from the plans.

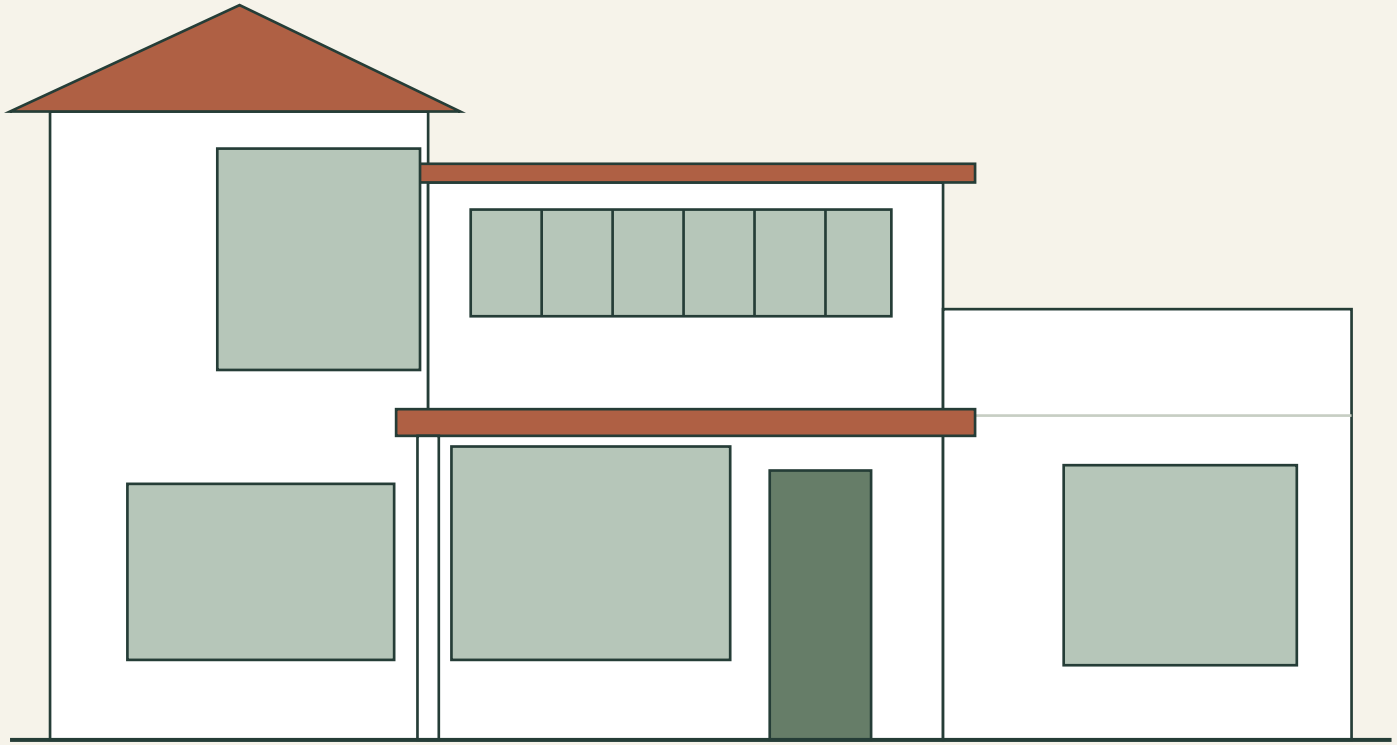

01 / Recessed bedroom wing

02 / Double-height living + verandah

03 / Master bedroom + open terrace

12.84 m overall width shown on ground-floor plan

MATERIALS

Warm off-white plaster

Natural terracotta tiles

Dark steel roof framing

Muted green or timber joinery

Limited local stone at entry


The main roof falls toward the viewer (west). Its slope is legible in the side view, not as a diagonal front eave.

Preserve the plan offsets and bay windows. No front balcony, carport, or additional upper room is assumed. Final window sizes must follow the opening schedule.

Make the roof work with the existing void

East-west concept section through the living room and first-floor gallery; all vertical levels below are proposed.

ROOF FALL: EAST (HIGH) TO WEST (LOW)

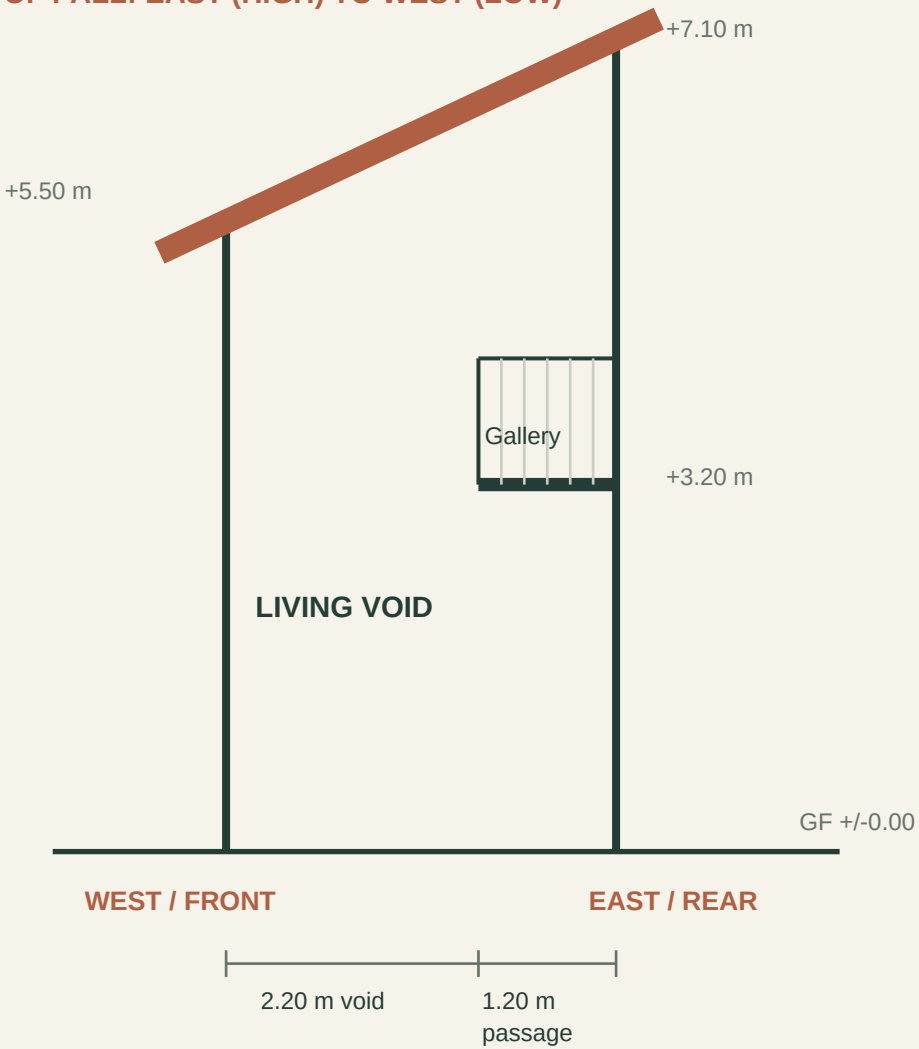

Indicative 3.40 m run / 1.60 m rise (~25 degrees). Confirm tile system minimum pitch and structural depth.

Keep the existing opening

Ground-floor living room: 4.62 x 3.50 m. The first-floor drawing shows a 2.20 m deep front opening and a 1.20 m passage behind it. The entire living footprint is not shown as a full-height void.

Use one simple roof plane

An exposed steel-and-tile assembly can form the actual roof over this zone. Avoid adding a decorative tile roof above a new concrete slab over the same void. The short roof section shown does not extend over the entire house.

Resolve the junctions

Coordinate the high roof edge with the stair enclosure and adjacent bedroom roof. Check flashing, stormwater overflows, wind uplift, corrosion protection, insulation and a ventilated, weatherproof tile build-up.

Shade the west face

Use a modest verandah roof, shaded clerestory and vertical screens where needed. A deep eave alone will not block low afternoon sun. Place the west gutter and downpipes away from the entrance.

Price before choosing

Compare installed steel + tiles + insulation + gutters against the roof/slab assembly it replaces. More height, glazing, separate roof junctions and maintenance can offset material savings.

A compact rear courtyard

Apply the reference atmosphere to the rear dining recess; keep it separate from the internal stair courtyard.

WHAT THE DRAWINGS ESTABLISH

Ground floor area	149.2 sq m / 1,606 sq ft (area drawing)
Main width	12.84 m (detailed ground-floor drawing)
Living / verandah	4.62 x 3.50 m / 3.13 x 1.50 m
Internal stair courtyard	2.43 x 1.80 m (area drawing)
Rear dining recess	3.30 m width; 2.63 m to rear building line
Upper bedroom	3.50 x 3.80 m; retain adjacent open terrace

The compound wall is drawn beyond the rear building line. The actual dining-to-boundary distance is not dimensioned. The owner confirmed use of the attached plan rather than the 2.00 m depth mentioned in the reference screenshot.

CONFIRM BEFORE FINAL ELEVATIONS

Rear courtyard clear depth and legal boundary/setbacks; floor and roof heights; opening schedule; structural spans; selected roof system; local installed rates.

REAR COURTYARD PROPOSAL

Light and privacy

A warm-white patterned screen, slim dark framing, timber-toned doors and one compact planted corner recreate the reference without overcrowding the court.

Preserve circulation

Use a compact fixed bench initially. A swing needs an independently designed support and verified travel clearance. Keep the usable route clear of doors, furniture and planting.

Make access explicit

The dining-facing opening appears drawn as a window. Direct dining-to-court doors and two side-access doors are proposed plan changes, not existing confirmed openings.

Cover only what is needed

Use a small opaque canopy over the bench and retain an open planted/daylight strip. Any glazed cover needs heat control, ventilation, cleaning access and positive drainage.

Resolve water and levels

Confirm the courtyard level; do not copy the screenshot step. Detail thresholds, drainage falls and a stormwater route without sending runoff into the dining room.

Visual concept

Material and atmosphere study. Use the diagrams and plan dimensions to coordinate the final design.



WEST-FACING FRONT



DOUBLE-HEIGHT LIVING



REAR COURTYARD

Concept visualization — refer to section for roof direction and levels