



ECE 391 Discussion

Week 3

Announcements & Reminders

- ▶ PS1 grades are up on Compass
- ▶ Due next Monday, Sep 17 at 6pm (commit on GitLab)
 - ▶ Master branch for grading
 - ▶ Don't be late and show up to your assigned demo day!
 - ▶ Rubric will be posted soon – ask if something is unclear
- ▶ Read the whole document carefully before you start – there's a lot!
 - ▶ Document suggests an order to write the functions
 - ▶ Do NOT write the whole MP at once – write each IOCTL and then test it
 - ▶ Demo questions will be based off of the documents and what you wrote for the MP

C Calling Convention

```
int binary_search(int key, int* array, int size);
```



Caller Saved	Callee Saved
EAX	EBX
ECX	ESI
EDX	EDI

Tasklet


- ▶ A computer's real-time clock (RTC) can generate interrupts at a settable frequency
- ▶ Tasklets are interrupt handlers' way of deferring work
 - ▶ Interrupt handlers need to be as short as possible – why?
- ▶ In MP1, the tasklet is scheduled by the periodic RTC interrupt
- ▶ The tasklet is the main part of the MP1 game, which aggregates information and updates the state of the game and the screen

Virtual Memory Issue

- ▶ Virtual memory allows each user-level program to have the illusion of its own memory address space – why?
- ▶ When passing memory addresses between a user-level program and the kernel, a translation is needed
- ▶ Translation is provided by `mp1_copy_to_user` and `mp1_copy_from_user`
- ▶ If you improperly use them, things may still work in user space, but will break in kernel space

Dispatcher

- ▶ Dispatcher does **NOT** modify the stack
 - ▶ No need to setup stack frame
 - ▶ Other functions don't need to return to the dispatcher
 - ▶ Use the JMP instruction instead of the CALL instruction for a function call
 - why?

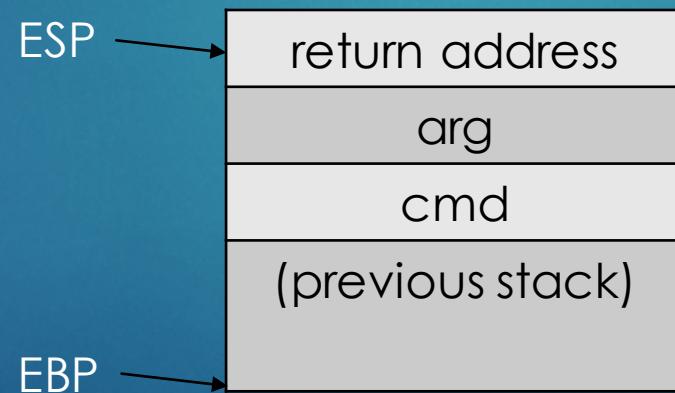

Updating a Linked List

- ▶ Wrong way

```
old_head = head
```

```
head = new_node
```

```
new_node->next = old_head
```

- ▶ Right way

```
new_node->next = head
```

```
head = new_node
```

Debugging

- ▶ Debugging will be hard, especially in kernel
- ▶ Your code may run in user-space, but it may not run in kernel space
- ▶ In kernel mode, when it fails, it crashes everything
- ▶ Suggestion: identify issues in kernel mode, debug and fix in user space; or comment out the IOCTLs and test one by one

Coding Style in x86 Assembly

- ▶ Bad

```
done1:
```

```
done2:
```

```
done3:
```

- ▶ Good

```
success:
```

```
free_mem:
```

```
bad_param:
```

Coding Style in C

- ▶ Bad
 - ▶ tmp1, tmp2, tmp3
- ▶ Good
 - ▶ velocity_x, delta_y, acceleration_z

Magic Numbers

- ▶ Any number that appears in your code without a comment or a meaningful name
 - ▶ `movl $1234, %ebx`
 - ▶ `int i = 5678;`
- ▶ If a number appears only once, you can use a comment
 - ▶ `cmpl $100, %ebx # loop for 100 times, so compare ebx with 100`
- ▶ If a number appears more than once, define a constant (or make a label if you are using x86 assembly)
 - ▶ `#define LOOP_COUNTER 100`

Other Things Related to Style

- ▶ No spaghetti code
 - ▶ Don't jump back and forth
 - ▶ Keep programs and functions short - create helper functions
- ▶ Comments
 - ▶ You have to comment your code
 - ▶ But don't comment on every line
- ▶ Function interface
 - ▶ Every function you write must have an interface