A0 version material code 201401100120

3.2 Rest

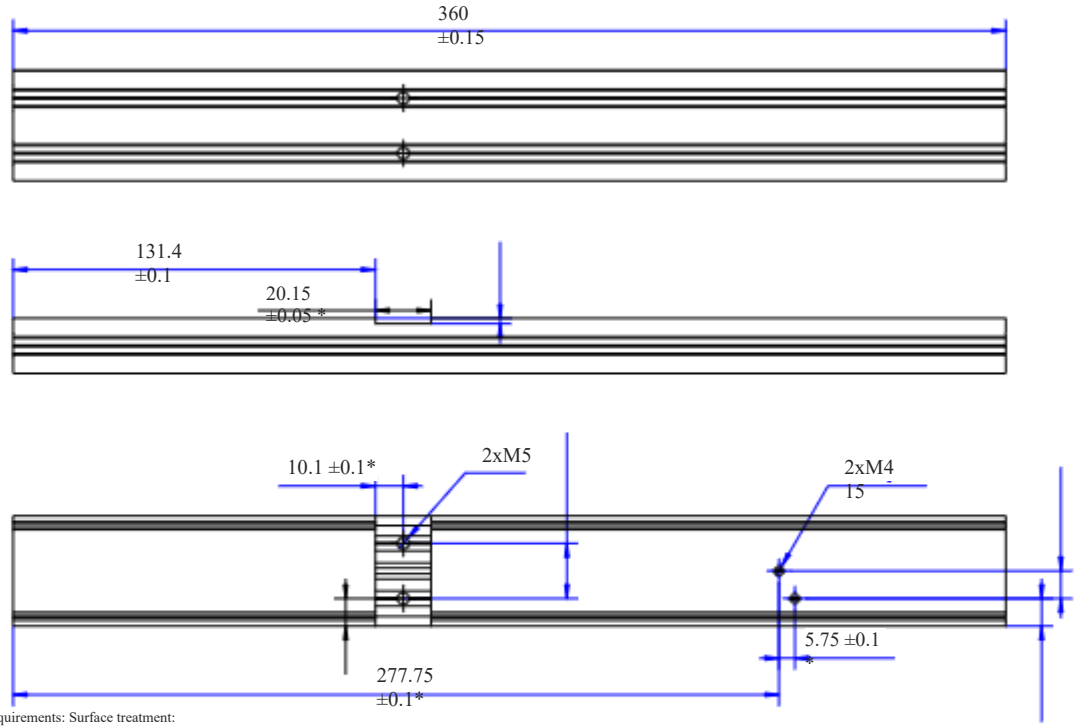



Printer standard 4020 profile, single side edge banding

Technical requirements: Surface treatment: black anodized; 1. Deburring, sharp corners blunt; 2. Chamfering C0.2 is not noted; 3. Dimensions marked with * are key dimensions; 4. For dimensions not noted, refer to the 3D drawing; 5 .The surface is protected from scratches, bumps, bruises, deformation and other defects.

A0		initial release	2024-8-21
Version	mark	Change content	date

Linear tolerances are implemented according to GB/T1804-m level; geometric tolerances are implemented according to GB/T1184-K level.

Limit deviation values for linear basic size segments	> 6 ~ 30	> 30 ~ 120 ~ 400	> 120	> 400 ~ 1000	> 1000 ~ 2000	> 2000 ~ 4000
	±0.2	±0.3	±0.5	±0.8	±1.2	±2
Unspecified tolerance values for straightness and flatness	≤10	> 10 ~ 30	> 30 ~ 100 ~ 300	> 100	> 300 ~ 1000	> 1000 ~ 3000
	0.05	0.1	0.2	0.4	0.6	0.8

design	RenSX	2024/9/6	Jie Xinhua Technology Co., Ltd.					Drawing number	6063 JXHMP3A02
Review								model material	
approve			stage mark		quantity	weight	Proportion		JXHMP3A02-01002
	1 in total	Picture 1			1	0.262	1:2	name	Bottom right profile