

### Parsing JSON Really Quickly: Lessons Learned



**Daniel Lemire** 

blog: https://lemire.me

twitter: @lemire

GitHub: https://github.com/lemire/


professor (Computer Science) at Université du Québec (TÉLUQ)

Montreal 🕶 🍸 🧰

### How fast can you read a large file?

- Are you limited by your disk or
- Are you limited by your CPU?

## An iMac disk: 2.2 GB/s, Faster SSDs (e.g., 5 GB/s) are available

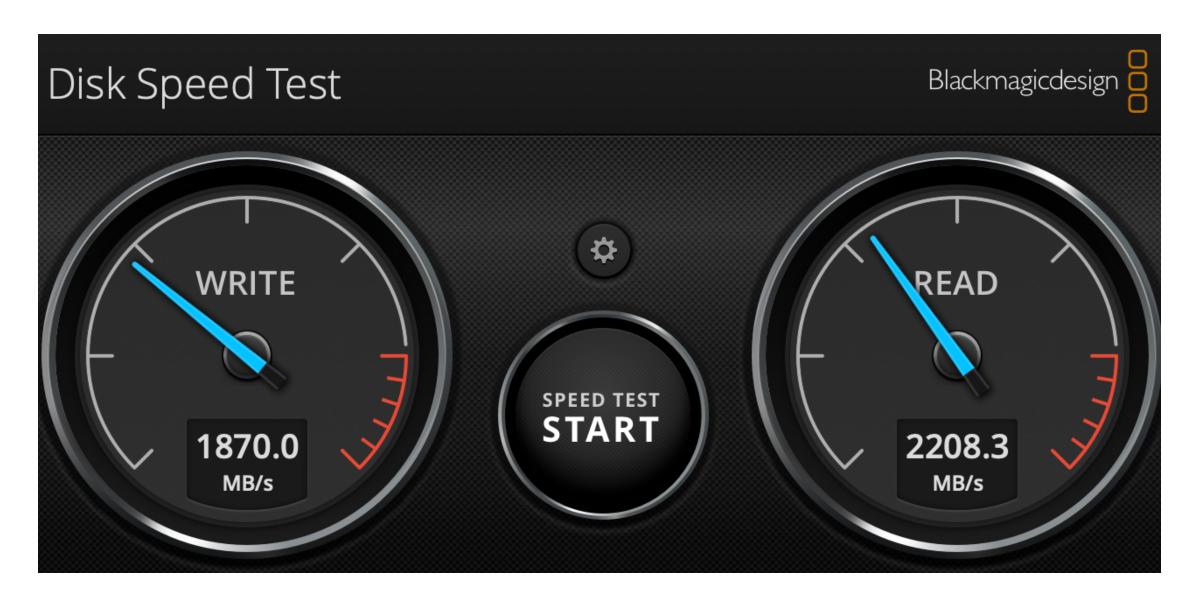

### Reading text lines (CPU only)

### ~0.6 GB/s on 3.4 GHz Skylake in Java

```
void parseLine(String s) {
  volume += s.length();
}

void readString(StringReader data) {
  BufferedReader bf = new BufferedReader(data);
  bf.lines().forEach(s -> parseLine(s));
}
```

#### Source available.

Improved by JDK-8229022


### Reading text lines (CPU only)

```
~1.5 GB/s on 3.4 GHz Skylake in C++ (GNU GCC 8.3)
```

```
size_t sum_line_lengths(char * data, size_t length) {
   std::stringstream is;
   is.rdbuf()->pubsetbuf(data, length);
   std::string line;
   size_t sumofalllinelengths{0};
  while(getline(is, line)) {
     sumofalllinelengths += line.size();
   return sumofalllinelengths;
```

Source available.

## Uniprocessor Performance (SINGLE CORE)

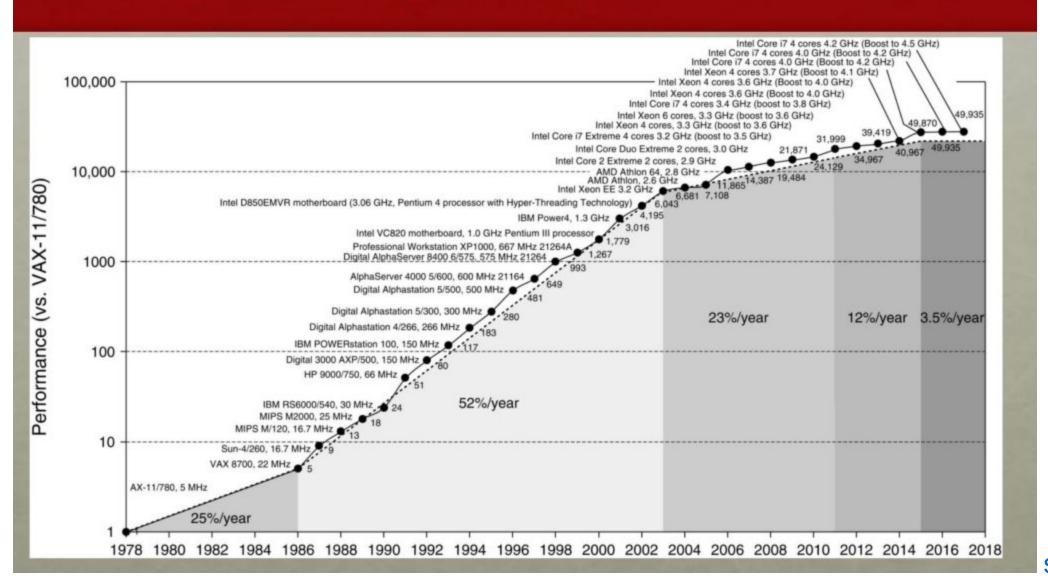

### **JSON**

- Specified by Douglas Crockford
- RFC 7159 by Tim Bray in 2013
- Ubiquitous format to exchange data

```
{"Image": {"Width": 800,"Height": 600,
"Title": "View from 15th Floor",
"Thumbnail": {
    "Url": "http://www.example.com/81989943",
    "Height": 125,"Width": 100}
}
```

### "Our backend spends half its time serializing and deserializing json"



### **JSON** parsing

- Read all of the content
- Check that it is valid JSON
- Check Unicode encoding
- Parse numbers
- Build DOM (document-object-model)

Harder than parsing lines?

### Jackson JSON speed (Java)

### twitter.json: 0.35 GB/s on 3.4 GHz Skylake

#### Source code available.

	speed
Jackson (Java)	0.35 GB/s
readLines C++	1.5 GB/s
disk	2.2 GB/s

### RapidJSON speed (C++)

### twitter.json: 0.650 GB/s on 3.4 GHz Skylake

	speed
RapidJSON (C++)	0.65 GB/s
Jackson (Java)	0.35 GB/s
readLines C++	1.5 GB/s
disk	2.2 GB/s

### simdjson speed (C++)

twitter.json: 2.4 GB/s on 3.4 GHz Skylake

	speed
simdjson (C++)	2.4 GB/s
RapidJSON (C++)	0.65 GB/s
Jackson (Java)	0.35 GB/s
readLines C++	1.5 GB/s
disk	2.2 GB/s

2.4 GB/s on a 3.4 GHz (+turbo) processor is

~1.5 cycles per input byte

### Trick #1: avoid hard-to-predict branches

Write random numbers on an array.

```
while (howmany != 0) {
   out[index] = random();
   index += 1;
   howmany--;
}
```

e.g., ~ 3 cycles per iteration

Write only odd random numbers:

```
while (howmany != 0) {
    val = random();
    if( val is odd) { // <=== new
        out[index] = val;
        index += 1;
    }
    howmany--;
}</pre>
```

### From 3 cycles to 15 cycles per value!

## Go branchless!


```
while (howmany != 0) {
   val = random();
   out[index] = val;
   index += (val bitand 1);
   howmany--;
}
```

back to under 4 cycles!

Details and code available

### What if I keep running the same benchmark?

(same pseudo-random integers from run-to-run)

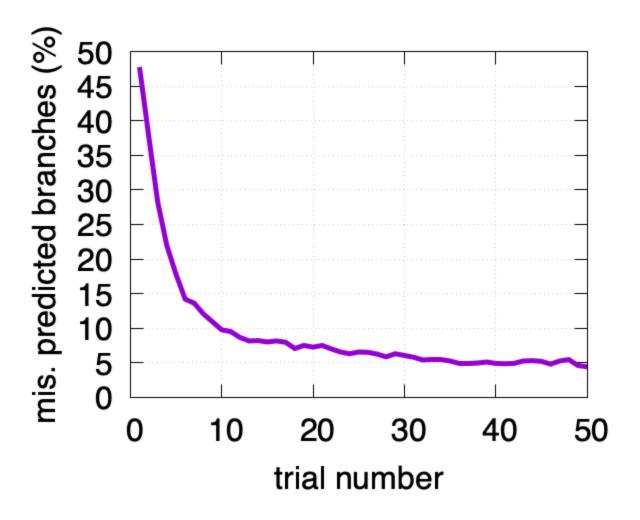

### Trick #2: Use wide "words"

Don't process byte by byte

## When possible, use SIMD

- Available on most commodity processors (ARM, x64)
- Originally added (Pentium) for multimedia (sound)
- Add wider (128-bit, 256-bit, 512-bit) registers
- Adds new fun instructions: do 32 table lookup at once.


### Trick #3: avoid memory/object allocation

In simdjson, the DOM (document-object-model) is stored into one contiguous tape.



### Trick #4: measure the performance!

benchmark-driven development

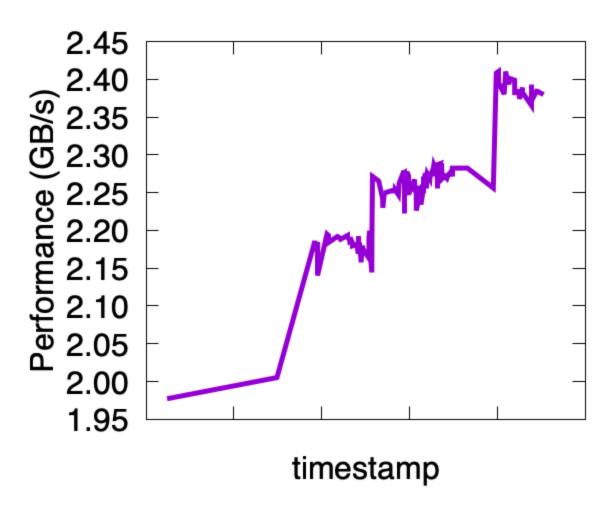

### **Continuous Integration Performance tests**

• performance regression is a bug that should be spotted early

### Processor frequencies are not constant

- Especially on laptops
- CPU cycles different from time
- Time can be noisier than CPU cycles

## Specific examples

## Example 1. UTF-8

Strings are ASCII (1 byte per code point)

Otherwise multiple bytes (2, 3 or 4)

Only 1.1 M valid UTF-8 code points

### Validating UTF-8 with if/else/while

```
if (byte1 < 0x80) {</pre>
        return true; // ASCII
if (byte1 < 0xE0) {
      if (byte1 < 0xC2 || byte2 > 0xBF) {
        return false;
} else if (byte1 < 0xF0) {
      // Three-byte form.
      if (byte2 > 0xBF
           | | (byte1 == 0xE0 \&\& byte2 < 0xA0) |
           | | (byte1 == 0xED \&\& 0xA0 <= byte2)
       blablabla
     ) blablabla
} else {
      // Four-byte form.
      .... blabla
```

### **Using SIMD**

- Load 32-byte registers
- Use ~20 instructions
- No branch, no branch misprediction

Example: Verify that all byte values are no larger than 244

Saturated subtraction: x - 244 is non-zero if an only if x > 244.

```
_mm256_subs_epu8(current_bytes, 244 );
```

One instruction, checks 32 bytes at once!

## processing random UTF-8

	cycles/char
branching	11
simdjson	0.5

### 20 x faster!

Source code available.

### Example 2. Classifying characters

- comma (0x2c) ,
- colon (0x3a) :
- brackets (0x5b,0x5d, 0x7b, 0x7d): [, ], {, }
- white-space (0x09, 0x0a, 0x0d, 0x20)
- others

Classify 16, 32 or 64 characters at once!


Divide values into two 'nibbles'

0x2c is 2 (high nibble) and c (low nibble)

There are 16 possible low nibbles.

There are 16 possible high nibbles.

# ARM NEON and x64 processors have instructions to lookup 16-byte tables in a vectorized manner (16 values at a time): pshufb, tbl

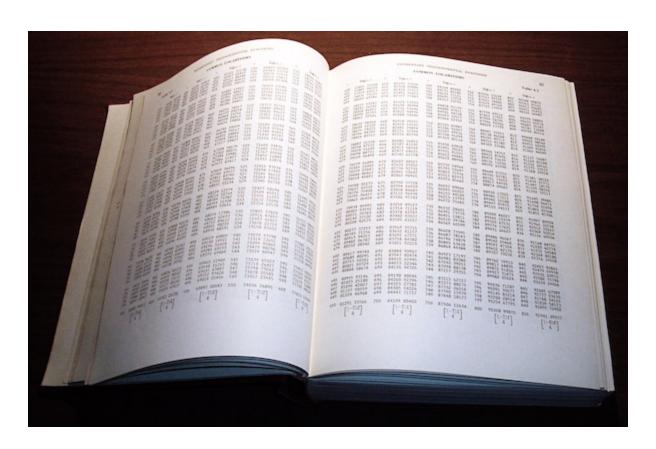

Start with an array of 4-bit values

[1, 1, 0, 2, 0, 5, 10, 15, 7, 8, 13, 9, 0, 13, 5, 1]

Create a lookup table

[200, 201, 202, 203, 204, 205, 206, 207, 208, 209, 210, 211, 212, 213, 214, 215]

0 200, 1 201, 2 202

#### Result:

[201, 201, 200, 202, 200, 205, 210, 215, 207, 208, 213, 209, 200, 213, 205, 201]

Find two tables H1 and H2 such as the bitwise AND of the look classify the characters.

```
H1(low(c)) & H2(high(c))
```

- comma (0x2c): 1
- colon (0x3a): 2
- brackets (0x5b,0x5d, 0x7b, 0x7d): 4
- most white-space (0x09, 0x0a, 0x0d): 8
- white space (0x20): 16
- others: 0

```
const uint8x16_t low_nibble_mask =
        (uint8x16_t){16, 0, 0, 0, 0, 0, 0, 0, 0, 8, 12, 1, 2, 9, 0, 0};
const uint8x16_t high_nibble_mask =
        (uint8x16_t){8, 0, 18, 4, 0, 1, 0, 1, 0, 0, 0, 3, 2, 1, 0, 0};
const uint8x16_t low_nib_and_mask = vmovq_n_u8(0xf);
```

#### Five instructions:

```
uint8x16_t nib_lo = vandq_u8(chunk, low_nib_and_mask);
uint8x16_t nib_hi = vshrq_n_u8(chunk, 4);
uint8x16_t shuf_lo = vqtbl1q_u8(low_nibble_mask, nib_lo);
uint8x16_t shuf_hi = vqtbl1q_u8(high_nibble_mask, nib_hi);
return vandq_u8(shuf_lo, shuf_hi);
```

## Example 3. Detecting escaped characters

- . " 🗗 \"
- · \ 🔁 \\
- . \" 🔁 \\\"

## Can you tell where the strings start and end?

```
{ "\\\"Nam[{": [ 116,"\\\" ...
```

Without branching?

## Escape characters follow an *odd* sequence of backslashes!

• Identify backslashes:

```
{ "\\\"Nam[{": [ 116,"\\\" ___111__: B
```

## Odd and even positions

- 1\_1\_1\_1\_1\_1\_1\_1\_1 : E (constant)
- \_1\_1\_1\_1\_1\_1\_1\_1\_1\_1 : O (constant)

Do a bunch of arithmetic and logical operations...

```
(((B + (B \& (B << 1)\& E))\& ~B)\& ~E) | (((B + ((B \& (B << 1))\& 0))\& ~B)\& E)
```

#### Result:

```
{ "\\\"Nam[{": [ 116,"\\\" ...
```

No branch!

## Remove the escaped quotes, and

the remaining quotes tell you where the strings are!

{	"\\\	\"Nam[-	{": [	116,"\\\	\"	
	_1	_1	_1	1	_1	: all quotes
		_1				: escaped quotes
	_1		_1	1	_1	: string-delimiter quotes

## Find the span of the string

Entire structure of the JSON document can be identified (as a bitset) without any branch!

## # Example 4. Number parsing is expensive

#### strtod:

- 90 MB/s
- 38 cycles per byte
- 10 branch misses per floating-point number

## Check whether we have 8 consecutive digits

## Then construct the corresponding integer

Using only three multiplications (instead of 7):

```
uint32_t parse_eight_digits_unrolled(const char *chars) {
   uint64_t val;
   memcpy(&val, chars, sizeof(uint64_t));
   val = (val & 0x0F0F0F0F0F0F0F0F) * 2561 >> 8;
   val = (val & 0x00FF00FF00FF) * 6553601 >> 16;
   return (val & 0x0000FFFF0000FFF) * 42949672960001 >> 32;
}
```

Can do even better with SIMD

# Runtime dispatch

On first call, pointer checks CPU, and reassigns itself. No language support.



```
int json_parse_dispatch(...) {
 Architecture best_implementation = find_best_supported_implementation();
  // Selecting the best implementation
  switch (best_implementation) {
  case Architecture::HASWELL:
    json_parse_ptr = &json_parse_implementation<Architecture::HASWELL>;
    break:
  case Architecture::WESTMERE:
    json_parse_ptr= &json_parse_implementation<Architecture::WESTMERE>;
    break:
  default:
    return UNEXPECTED_ERROR;
  return json_parse_ptr(....);
```

## Where to get it?

- GitHub: https://github.com/lemire/simdjson/
- Modern C++, single-header (easy integration)
- ARM (e.g., iPhone), x64 (going back 10 years)
- Apache 2.0 (no hidden patents)
- Used by Microsoft FishStore and Yandex ClickHouse
- wrappers in Python, PHP, C#, Rust, JavaScript (node), Ruby
- ports to Rust, Go and C#

## Reference

 Geoff Langdale, Daniel Lemire, Parsing Gigabytes of JSON per Second, VLDB Journal, https://arxiv.org/abs/1902.08318

### Credit

Geoff Langdale (algorithmic architect and wizard)

#### Contributors:

Thomas Navennec, Kai Wolf, Tyler Kennedy, Frank Wessels, George Fotopoulos, Heinz N. Gies, Emil Gedda, Wojciech Muła, Georgios Floros, Dong Xie, Nan Xiao, Egor Bogatov, Jinxi Wang, Luiz Fernando Peres, Wouter Bolsterlee, Anish Karandikar, Reini Urban. Tom Dyson, Ihor Dotsenko, Alexey Milovidov, Chang Liu, Sunny Gleason, John Keiser, Zach Bjornson, Vitaly Baranov, Juho Lauri, Michael Eisel, Io Daza Dillon, Paul Dreik, Jérémie Piotte and others