


Remove all punching burrs after machining or press-forming process, draft angle 2°, fillets not quoted R=2, chamfers not quoted: 0,5x45°. For other specifications please contact the Technical Department.  
*Eliminare bave e spigoli da lavorazione o stampaggio, sforni generali 2°, raggi non quotati: R=2, smussi non quotati: 0,5x45°. Per ogni ulteriore specifica, contattare l'Ufficio Tecnico*



$\sphericalangle 0,4$	$-0,2/100$
$\bigcirc 0,4$	$//0,2/100$
$\odot 0,25$	$\perp 0,2/100$

Angles  $\pm 1^\circ$   
Angoli  $\pm 1^\circ$

General tolerance - <i>Tolleranza generale</i> : UNI EN 22768/1 - M									
Length and Diam.	0,00	6,00	30,0	120	315	1000	2000	>	
<i>Lungh. e diametri</i>	6,00	30,0	120	315	1000	2000	4000	4000	
Tolerance <i>Tolleranza</i>	±0,1	±0,2	±0,3	±0,5	±0,8	±1,2	±2,0	±3,0	

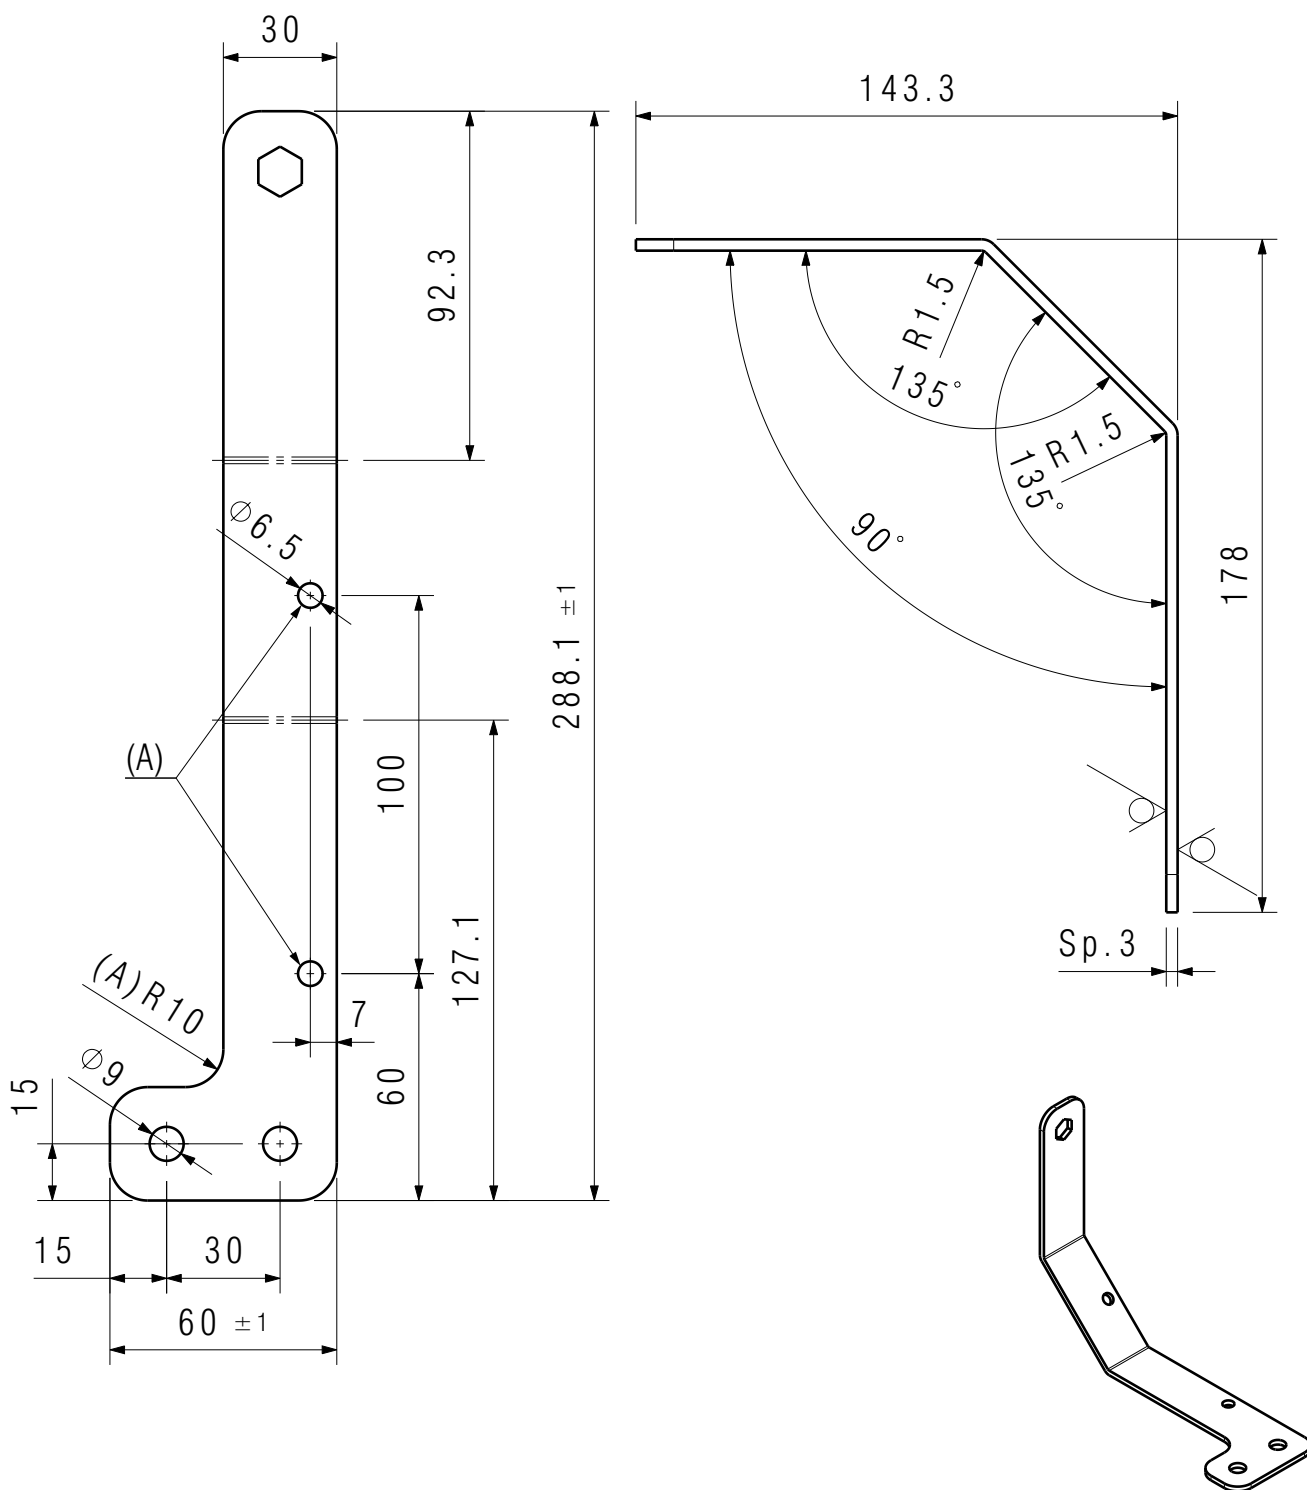

PARTE SPECCHIATA / Mirrored part B0C1P2426

01	B19-046	C-1	(A) Added holes and chamfer (A) Aggiunti fori e raccordo	gsama	sbuzzolani	19/11/2019
Rev	Mod. N°	Type	Modification object / Descrizione modifica	Drawn by	Approved by	Approv. Date
<div><p>MASCHIO FIENAGIONE Via Bredina, 6 - 26100 Cremona (CR) - Italy Email: info@maschio.com www.maschio.com</p></div> <p>THIS DRAWING IS PROPERTY OF MASCHIO GROUP AND PROTECTED IN ACCORDANCE WITH PREVALING LAW</p>				Treatment: --		Creation Date
				Trattamento: --		
				Surf.Finish: --		24/10/2018
				Finitura sup: --		
				Material: S235 EN 10025-1:2005		Weight [Kg]
Document No: FERABOLI      Class: --      Critical Lev: --		0,217				
Blank Decr: --		Perimeter [mm]				
Descr.Grezzo:--						
Part Nr: B0C1P2427      Replace: --		Blank: --      Wet Area[m2]: --	808			
Description: RIGHT LOWER ATTACK CARTER Descrizione: ATTACCO CARTER INFERIORE DX		European method  Scale: 1:2		Circumferences included		