
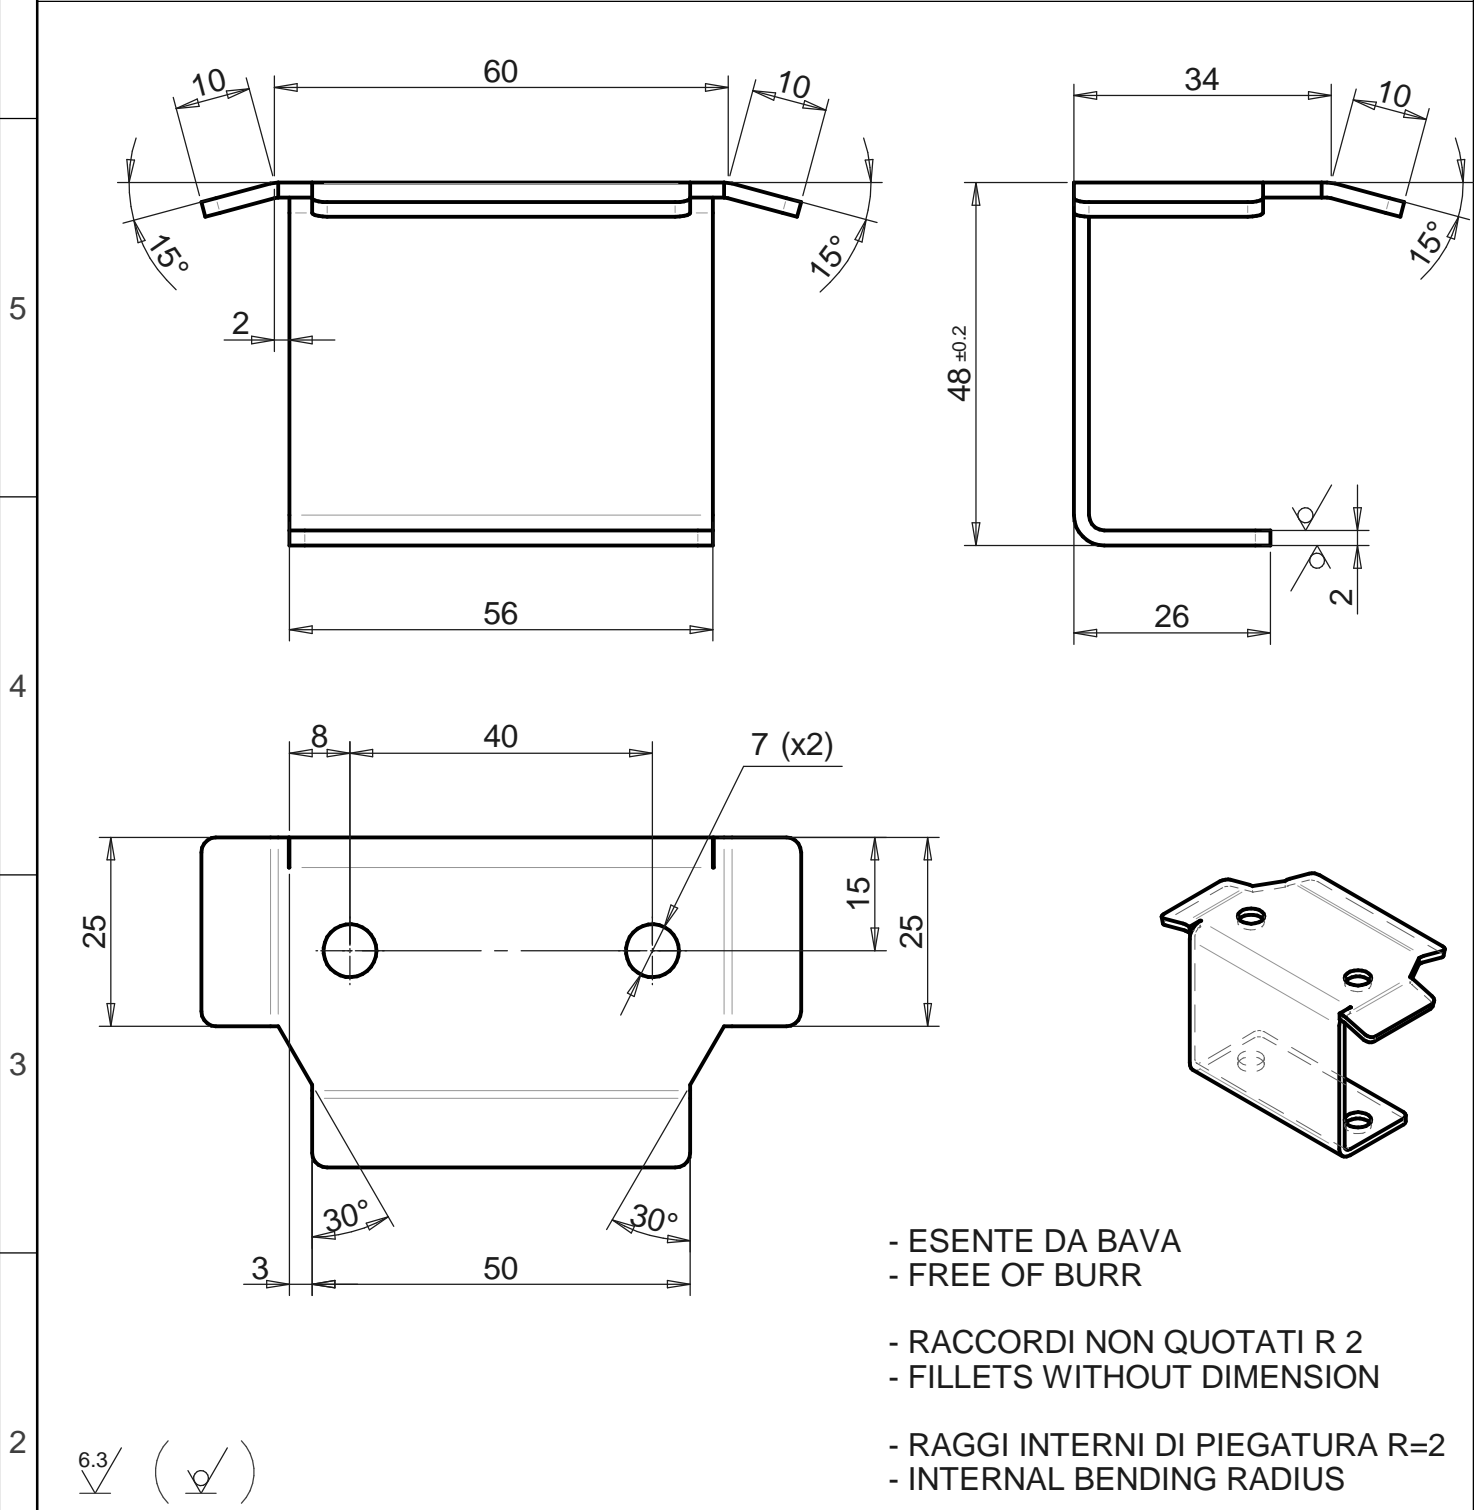


A	B	C	D
GENERAL TOLERANCES			
Angular dimension $\pm 1^\circ$ - Roundness range of tolerance from IT4 to IT11. Must be contained within half of dimensional tolerance.			
MACHINED holes H14 shafts h14 linear values Js14 -- ROUGH holes H16 shafts h16 linear values Js16			
SHEETS cutting/laser cutting/punching Js13 holes H13 bending/pressing Js14 -- ALUMINIUM DIE CASTING Savio Norm 4011_1005_00			
PLASTIC MATERIALS according to DIN 16901 -- CAST IRON Savio Norm 4011_1003_00			
The general tolerances for ROUGH of plastic (DIN 16901) of aluminium (4011_1005_00), of CAST IRON (4011_1003_00), must be intended H for holes, h for shafts, Js for all the other dimensions			



- ESENTE DA BAVA
- FREE OF BURR
- RACCORDI NON QUOTATI R 2
- FILLETS WITHOUT DIMENSION
- RAGGI INTERNI DI PIEGATURA R=2
- INTERNAL BENDING RADIUS

CN05584				10/02/2022	00	
Change	Modification details:				Date Mod:	IRP
Changes to previous release: QUOTA 48 ERA 47			Obtain from:		Substitute: 044168.0.0	
Material: DC01+A-G UNI EN 10130			Code: 4032_6152_99			
Supply state: +A-G: SURFACE A FINISHING G			Dimensions:			
Thermic treat.:			Hardness(T):			
Surface treat.: Cataphoresis epoxy graphite black RAL9011 4010-0003-00			Hardness(S):			
DENOMINATION: REGGETTA						
1 Savio		Draw.: Enrico Gaiotto	Date: 07/02/2022	044168.1.0		
		Mod.: Enrico Gaiotto	Sheet N°: 1/1			
		App.: Giuseppe Morini	Scale: 1:1	BRACKET		