
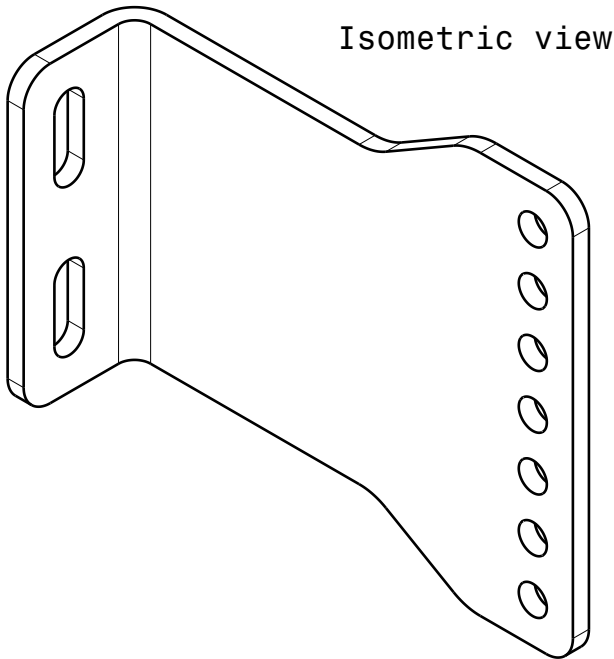
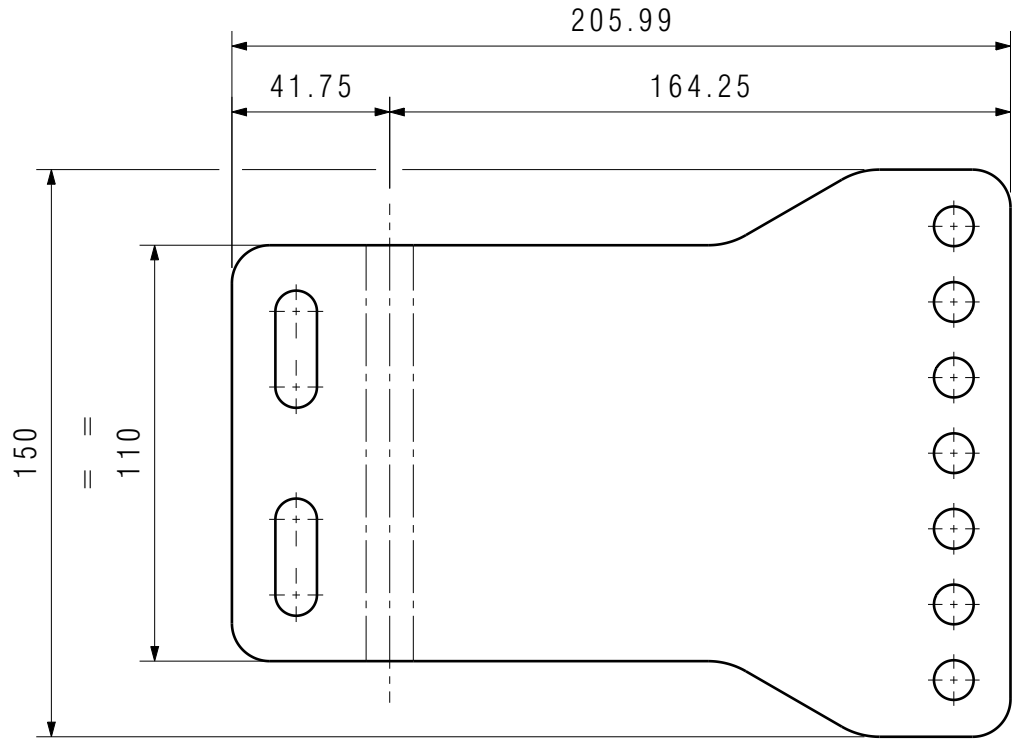
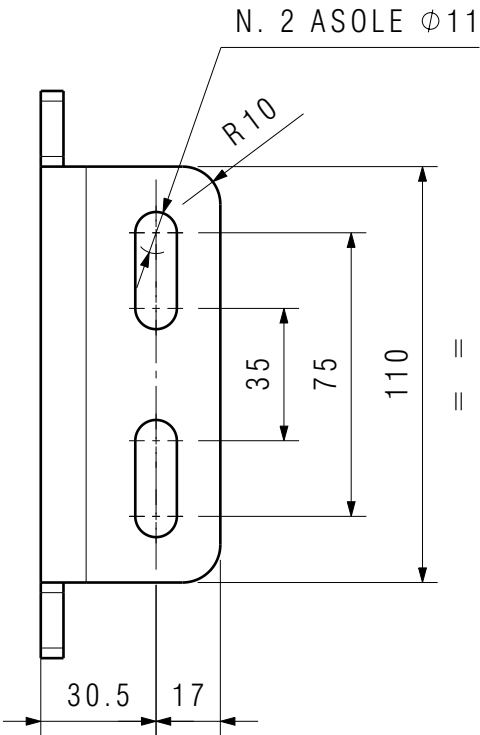
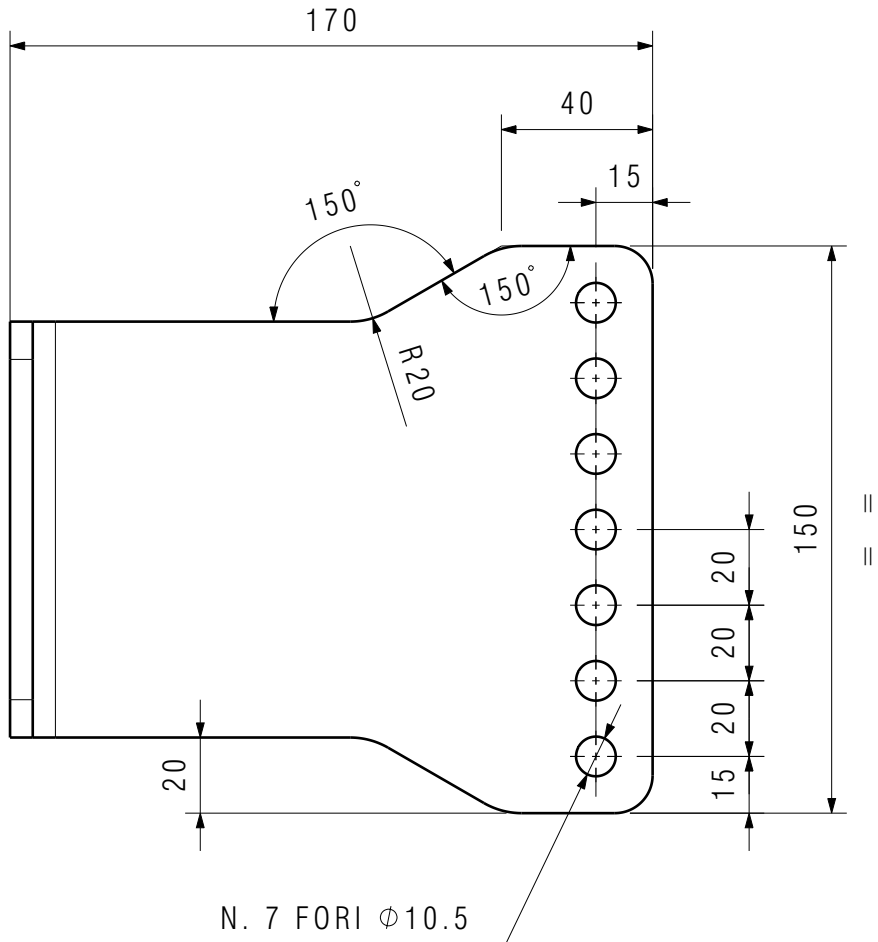


SUPPLY SPECIFICATIONS / SPECIFICHE DI FORNITURA
Remove all punching burrs after machining or press-forming process, draft angle 2°, fillets not quoted R=2, chamfers not quoted: 0,5x45°. For other specifications please contact the Technical Department.
Eliminare bave e spigoli da lavorazione o stampaggio, sforni generali 2°, raggi non quotati: R=2, smussi non quotati: 0,5x45°. Per ogni ulteriore specifica, contattare l'Ufficio Tecnico

| | | |
|--|------|-----------|
| | 0,4 | -0,2/100 |
| | 0,4 | //0,2/100 |
| | 0,25 | ⊥ 0,2/100 |

Angles $\pm 1^\circ$
Angoli $\pm 1^\circ$

| General tolerance - Tolleranza generale: UNI EN 22768/1 - M | | | | | | | | | |
|---|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Length and Diam. Lung. e Diametri | 0.00 | 6.00 | 30.0 | 120 | 315 | 1000 | 2000 | > 4000 | ± 3.0 |
| | 6.00 | 30.0 | 120 | 315 | 1000 | 2000 | 4000 | | ± 2.0 |
| Tolerance Tolleranza | ± 0.1 | ± 0.2 | ± 0.3 | ± 0.5 | ± 0.8 | ± 1.2 | ± 2.0 | ± 3.0 | |
| | | | | | | | | | |

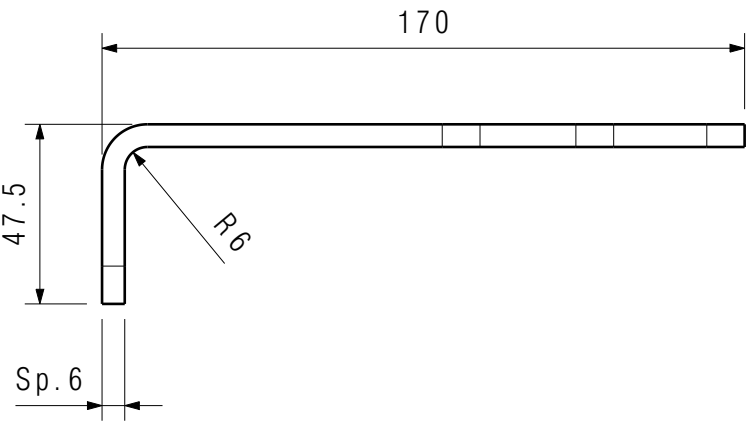

NB: PER QUOTE MANCANTI FARE RIFERIMENTO A DXF
NB: FINITURA SUP. ALTERNATIVA: Zincatura a caldo Rif. Cap TS-037

| | | | | | | |
|--|---------|-----------|--|---|-------------|-------------------------------|
| 00 | N20-004 | A-2 | Release Emissione | smorutto | ndorigutto | 20/02/2020 |
| Rev | Mod. N. | Type | Modification object / Descrizione modifica | Drawn by | Approved by | Approv. Date |
| MASCHIO GASPARDO S.p.A. Via Marcello, 73 - 35011 Campodarsego (Padova) - Italy Email: info@maschio.com www.maschionet.com THIS DRAWING IS PROPERTY OF MASCHIO GROUP AND PROTECTED IN ACCORDANCE WITH PREVAILING LAW | | | | Treatment: -- Trattamento: -- Surf.Finish: Sandbla. Cataph. Paint Ref. Cap TS-001 Finitura sup: Sabb. Cataf. Vern. Rif. Cap TS-001 Material: S235 EN 10025-1:2005 | | Creation Date 28/11/2018 |
| Model: -- | | Group: -- | | Critical Lev: -- | | Weight [kg] 1,123 |
| Part Nr: N51114850 | | | Replace: -- | | Blank: -- | Perimeter [mm] 213 |
| Description: BDL FIX SUPPORT Descrizione: SUPP. FISSO BDL | | | | Blank: -- Wet Area[m2]: 0.0540 | | Circumferences included -- |
| European method | | | | Scale: 1:2 | | |