GENERAL TOLERANCES
Angular dimension +-1° - Roundness range of tolerance from IT4 to IT11. Must be contained within half of dimensional tolerance.
MACHINED holes H14 shafts h14 linear values Js14 -- ROUGH holes H16 shafts h16 linear values Js16
SHEETS cutting/laser cutting/punching Js13 holes H13 bending/pressing Js14 -- ALUMINIUM DIE CASTING Savio Norm 4011_1005_00
PLASTIC MATERIALS according to DIN 16901 -- CAST IRON Savio Norm 4011_1003_00
The general tolerances for ROUGH of plastic (DIN 16901) of aluminium (4011_1005_00), of CAST IRON (4011_1003_00), must be intended H for holes, h for shafts, Js for all the other dimensions

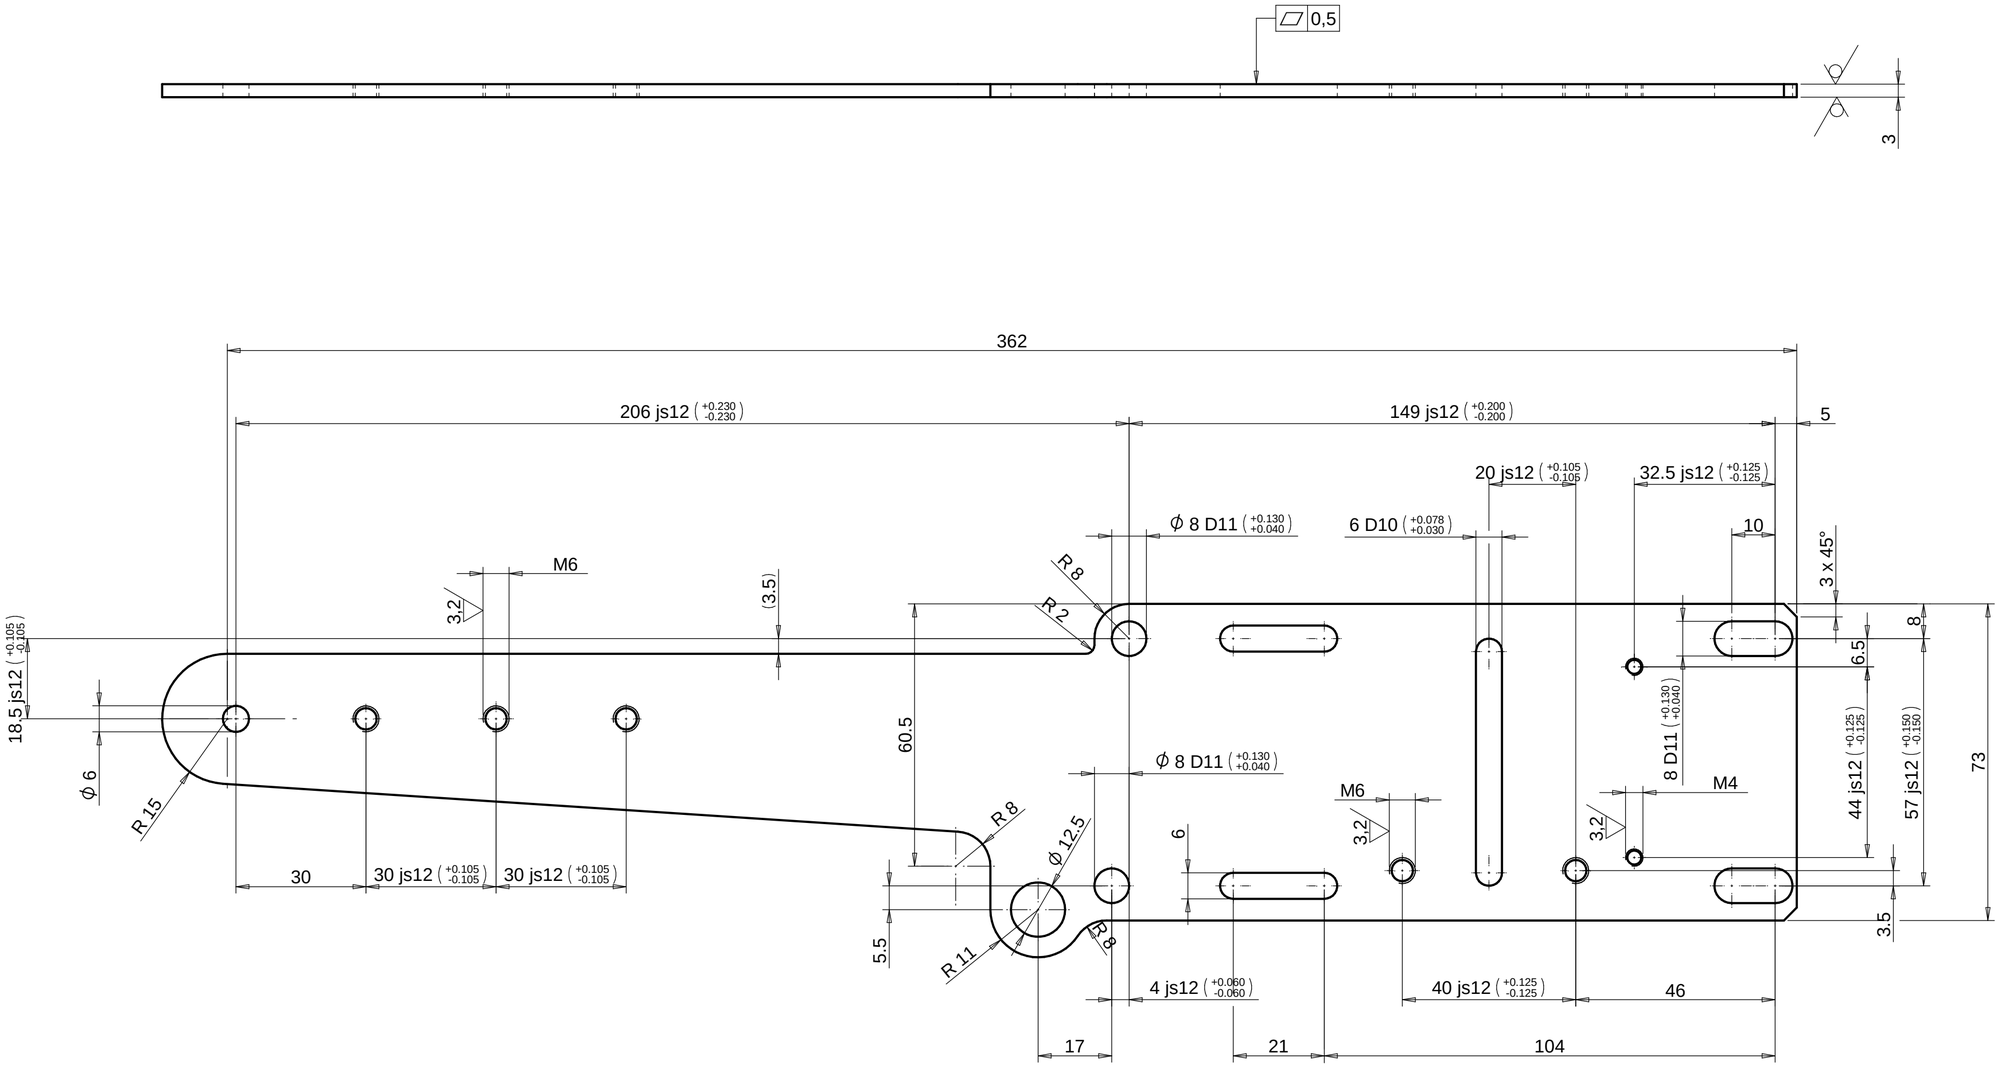


6,3 (3,2)

MAXIMUM BURR 0,15 / BAVA MAX 0,15

| | | | |
|---|---|---|---|
| CN01434 | | | 0 |
| Change | Modification details: | | IRP |
| Changes to previous release: AGGIUNTO NR.1 FILETTO M6 ZONA D4 | | Substitute: 26140_1347_0_0 | |
| Material: DC01+A-G UNI EN 10130 | | Code: 4032_6152_99 | |
| Supply state: +A-G: SURFACE A FINISHING G | | Dimensions: 3.0x1250x2500 | |
| Thermic treat.: | | Hardness(T): | |
| Surface treat.: Fe/Zn 8 C UNI ISO 2081 free Cr VI | | Hardness(S): | |

DENOMINATION: SUPPORTO

| | | | | |
|---|---|---|---|---|
| Savio | Draw.: Luca Guarda | Date: 01/03/2016 | 009751.0.0 | |
| | App. : Giuseppe Morini | Sheet N°: 1/1 | | |
| | | Scale: 1:1 | BRACKET | |

Reserved property of SAVIO MACCHINE TESSILI S.p.A. In accordance with the law, the contents of this drawing may not be re-produced or communicated to third parties.