INTERNATIONAL VALVE TECHNOLOGIES

STAINLESS STEEL

SWING CHECK VALVES

MODEL CV-1

Features & Benefits


- Investment SS Cast steel body
- Horizontal or vertical installation
- Lightweight & compact

Consult factory for Graphite gasket in applications over 500F



600 PSI

Dimensional Drawing

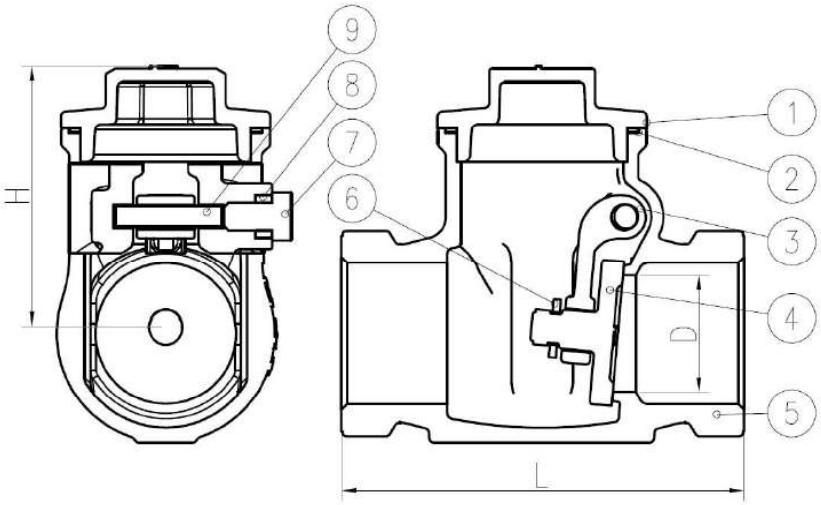

Materials

NO.	Part	Material
1	Cap	CF8M
2	Gasket	Teflon
3	Connecting Rod	CF8M
4	Disc	CF8M
5	Body	CF8M
6	Washer	316
7	Bolt	304
8	Bolt Washer	Teflon
9	Pin	316

Dimensions & Weights

SIZE	L	D	H	Wt.
1/4"	2.362	0.575	1.673	0.26
3/8"	2.362	0.575	1.673	0.26
1/2"	2.362	0.575	1.673	0.26
3/4"	3.071	0.74	1.909	0.39
1"	3.268	0.945	2.165	0.49
1-1/4"	3.72	1.189	2.323	0.78
1-1/2"	4.173	1.476	2.52	1.05
2"	4.862	1.85	2.835	1.57
2-1/2"	6.004	2.5	3.642	3.04
3"	6.87	3.051	4.134	4.89

Specifications

SIZE RANGE	1/4"-3"
WORKING TEMPERATURE	600PSI
WORKING PRESSURE	14F - 320F
END CONNECTIONS	NPT/SW