

Product Guide

CAM-420-PTZ

4K Dual-Lens AI PTZ Camera with AI Features



WyreStorm

**4K Dual-Lens PTZ Camera
with NDI & AI Features**

Contents

Product Overview & Main Features

Why Choose Us?

Interface & Specifications

Typical Connection & Applications

Competitor Analysis

Quick Installation Guide

Q & A Session

Product Overview



..... 4K dual-lens PTZ Camera with NDI & AI features

The CAM-420-PTZ is a 4K dual-lens AI tracking camera designed for medium and huddle rooms. It features a 3x optical zoom and 5x digital zoom PTZ camera with a 110° DFOV and a panoramic lens with a 120° DFOV. With four built-in microphones, it supports voice detection and audio tracking to deliver a more intelligent and engaging conferencing experience.

Powered by advanced AI technology, the camera offers Auto Framing, Speaker Tracking, Presenter Tracking, and Individuals Gallery for a more immersive meeting. NDI technology ensures seamless IP-based video distribution and flexible system integration. In addition, multiple installation options—on a conference table, on top of a TV, wall-mounted, or tripod-mounted—make it instantly ready for any meeting environment.

Why Choose Us: 1. Immersive Viewing Experience

Deliver an immersive conferencing experience with 4K high-resolution video, a dual-lens design, and built-in PIP functionality – ensuring stunning detail and captivating visuals throughout the meeting.

4K high-resolution video

Supports up to 4K@30fps video output via HDMI, USB-C, and NDI, ensuring superior image clarity for your presentations.

Dual-lens design

Features a built-in dual-lens system: a 4K PTZ camera with a 110° DFOV to capture every detail of participants in the room, and a 120° DFOV panoramic lens to capture the entire meeting space.

Built-in PIP functionality

The built-in PIP feature allows participants to view multiple perspectives simultaneously – for example, seeing both the speaker and the room view at once – creating a more dynamic conferencing experience.



Powerful · Reliable · Simple

Why Choose Us: 2. Smart AI-Powered Experience & NDI Support

Smart AI enables effortless Auto Framing, the Individuals Gallery feature, and intelligent tracking to maintain a natural meeting flow. Meanwhile, NDI technology delivers high-quality streaming for seamless integration into any professional setup.

Precise and smooth tracking experience

Supports Auto Framing, Speaker Tracking, and Presenter Tracking to enhance tracking stability and provide a smoother, more reliable experience.

Individuals Gallery merges close-ups

The Individuals Gallery feature presents dedicated close-up views of each attendee in the room. This significantly improves visibility, enhances engagement, and creates a more immersive meeting experience.

NDI | HX for flexible IP workflows

NDI technology offers greater system flexibility. All NDI-compatible devices on the same network can be accessed easily, enabling more sources to be used for hybrid teaching and meetings.



Powerful · Reliable · Simple

Why Choose Us: 3. Multiple Installation Options, Plug & Play

Multiple installation options simplify the setup process, making it easy for guests to connect and present effortlessly.

Multiple Installation Options

Flexible installation options—including placement on a conference table, on a display, on the wall, or on a tripod—make the system adaptable to any meeting environment.

Simplified Setup

Plug-and-play functionality allows guests to connect and start presenting easily, without the need for additional software or complex configuration.



Powerful · Reliable · Simple

Interface of the Product

Front Panel



Featuring:

USB-C output

Connect to a laptop or base unit (e.g., SW-640L-TX-W, MX-0403-H3-MST, MX-0402-MST, NHD-500 series, etc.) to create an immersive hybrid meeting experience.

HDMI output

Connect to a display with high-quality video up to 4K@30Hz.

Ethernet Port

Connect to a network switch for remote device management via the web interface, or for NDI transmission to deliver video over Ethernet.

Rear Panel



WyreStorm[®]

Powerful · Reliable · Simple

Specifications & Packing List

Main Specifications	
Outputs	1x USB-C output, 1x HDMI output, 1x NDI output
Video Resolution (Max)	4K@30fps
Output Video Encoding	MJPEG (default) H.265 H.264 NV12
Sensor	AI lens: 8MP 3x optical zoom; 5x digital zoom DFOV: 110° Panoramic lens: 2MP Fixed lens DFOV: 120°
Rotation	Horizontal: $\pm 75^\circ$ Vertical: $\pm 45^\circ$
Smart AI	Auto Framing (default as on), Speaker Tracking Presenter Tracking, Individuals Gallery
Microphone	4x MEMS mic array Pickup Range: 5m * Note: MIC is used for internal AI processing and does not capture audio for hybrid transmission in conferences;
USB	1x USB-C: USB 3.2 Gen 1 Max Bandwidth: 5.0 Gbps
	1x USB-A: USB 2.0 Max Bandwidth: 480Mbps
Ethernet	1x LAN port NDI output Web UI API
Control Method	Web UI RCU API
Power Supply	12V DC 3A

What's in the Box?

- 1x CAM-420-PTZ Camera
- 1x 12V/3.0A Power Supply (US, UK, EU, AU)
- 1x USB-C to USB3.0 Type-A cable (1.8m)
- 1x Mounting Kits (installation on table or wall)
- 1x Quick Start Guide
- 1x Remote Controller
- 1x Privacy Cover


Typical Connection & Applications

Application Scenario 1: Medium Conference Room

Deliver a professional hybrid meeting experience with the CAM-420-PTZ camera and HALO-80 speakerphone. Participants can easily share content, interact with remote colleagues, and enjoy a seamless and efficient meeting experience.

Key Benefits Include:

- **Multiple casting methods** : Simplifies presentations with various options.
- **Hybrid Teaching & Meeting** : Connects to the CAM-420-PTZ and HALO-80 speakerphone to provide a professional hybrid conferencing experience.
- **Flexible control methods** : Quick and smooth control by RS232, or Web-UI or working with our In-Desk Box.

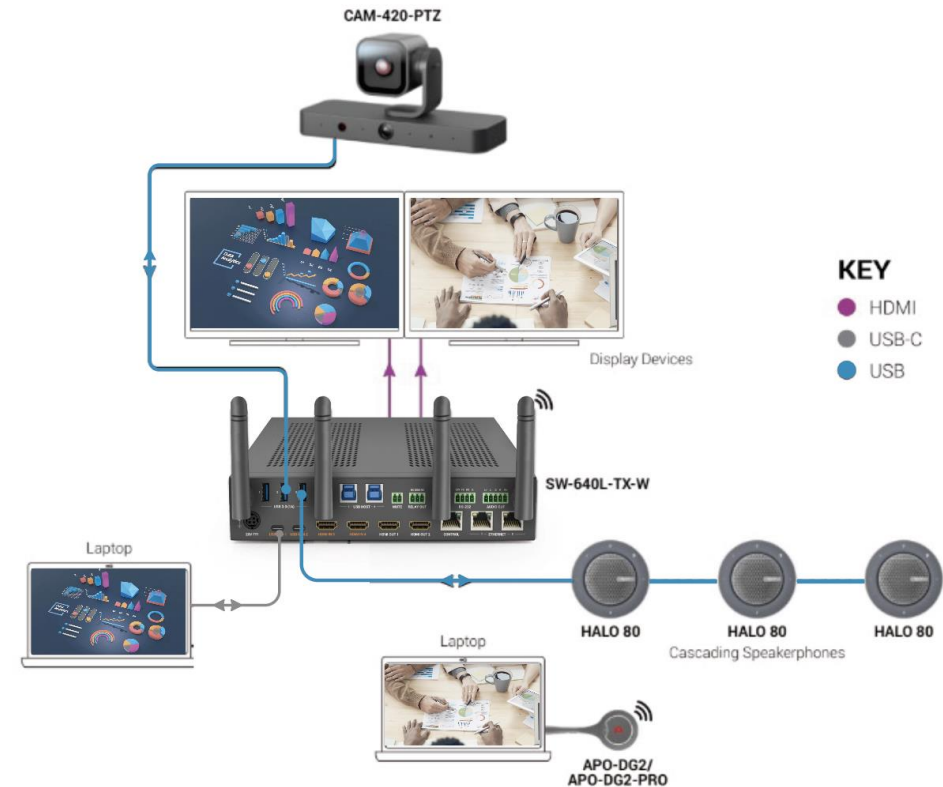


Typical Connection & Applications

Application Scenario 2: Medium Conference Room (NDI)

Designed to create a seamless, professional hybrid experience with NDI technique (CAM-420-PTZ, CAM-0402-BRG). Participants can easily share content, interact with remote colleagues, and enjoy a professional and efficient meeting experience.

Key Benefits Include:

- **Multiple casting methods** : Simplifies presentations with various options.
- **NDI® | HX2 for NDI cameras**: Enables video sources to be transmitted over Ethernet, allowing more sources to be integrated into hybrid teaching and conferencing setups.
- **Hybrid Teaching & Meeting** : Connect to CAM-420-PTZ, speakerphone, we offer professional hybrid experience.

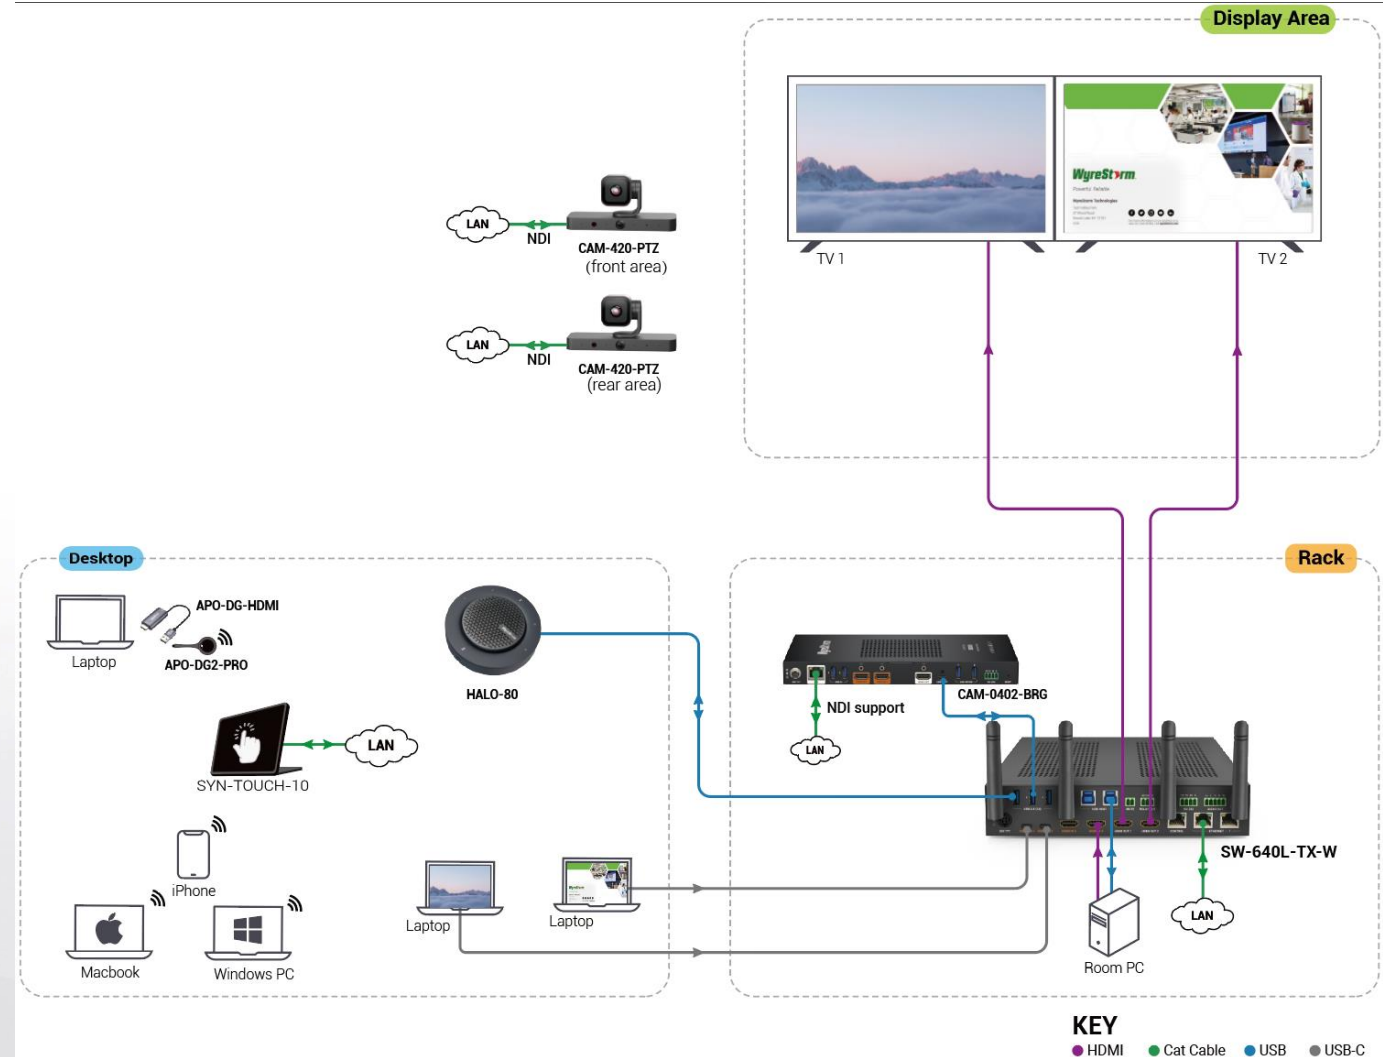

Comparison with Other Competitors

Features		CAM-420-PTZ	Logi Rally PTZ	Yealink UVC86	Aver CAM570
Main Features	Resolution	Up to 4K 30fps	Up to 4K 30fps	Up to 4K 30fps	Up to 4K 30fps
	AI tracking feature	Auto Framing Presenter Tracking Speaker Tracking Individuals Gallery	N/A	Auto Framing Presenter Tracking Speaker Tracking Smart Gallery	Auto Framing Presenter Tracking Speaker Tracking Smart Gallery
	Picture Mode	Single / PiP	Single	Single / PiP	Single / PiP
	Outputs	USB output: 4K@30fps HDMI output: 4K@30Hz NDI output: 4K@30Hz	USB output: 4K@30fps	USB output: 4K@30fps HDMI output: 4K@30Hz	USB output: 4K@30fps HDMI output: 4K@30Hz NDI output: 4K@30Hz
Lens	AI Lens	8MP, 3x optical Zoom, 5x digital Zoom DFOV 110°	8MP, 5x optical Zoom, DFOV 90°	8MP, 12x optical Zoom, DFOV 90°	8MP, 12x optical Zoom, DFOV 90°
	Panoramic Lens	2MP, fixed focus, DFOV 120°	N/A	8MP, fixed focus, DFOV 120°	8MP, fixed focus, DFOV 95°
Audio	Mic array*	4x mics	N/A	6x mics	3x mics
Control Type		Remote Control, WEB UI	Remote Control Software	Remote Control, WEB UI	Remote Control, WEB UI

*The built-in mics are for the audio-tracking function, it cannot be used as an audio source for video-conferencing software.

Quick Installation Guide

Effortlessly set up your conference camera with simple steps, ensuring hybrid configuration and an exceptional viewing and hybrid experience.

- **Connect Interfaces:** Follow the standard product connection guidelines and customize connections based on your environment's layout for optimal performance.
- **Create Your Hybrid Environment:** Create your video, audio, USB settings using the Web-UI. For detailed instructions, refer to the user manual.
- **Enjoy Superior Visuals:** Experience stunning video clarity and immersive visuals tailored to your needs.



Important Notes for Installation

- Ensure all cables are securely connected to avoid performance issues.
- Check your network settings and confirm that the device is on the correct subnet.
- Double-check configuration settings in the Web-UI to optimize display and functionality.
- For complex installations, refer to the documentation or seek professional assistance if necessary.

Final Thoughts

Q & A Session

Got questions? Don't hesitate to ask away.

