FLAT PATTERN - viewed from bend-note face (UP = toward viewer) scale 1:5

red dash-dot = BEND UP blue dash-dot = BEND DOWN green = ETCH/mark datum A = bottom-left corner of flat

BEND TABLE

No	Dir	Angle	R in	From A	BA	BD	V-die
B1	UP	90°	2	17.51 (Y)	5.31	4.69	24
B2	UP	90°	2	251.18 (Y)	5.31	4.69	24

BA = bend allowance, BD = bend deduction (mm), K = 0.46, inside radius as listed. V-die = 8T opening (mm).
"From A" = bend-line centre from datum edge. 304: ~1.5x mild-steel tonnage, 2-3 deg extra springback.
WARNING: B1, B2 inside R < 1T - cracking risk in 304; use R >= 3 tooling or prove on first-off.

FORMED SECTION (neutral axis, to scale)

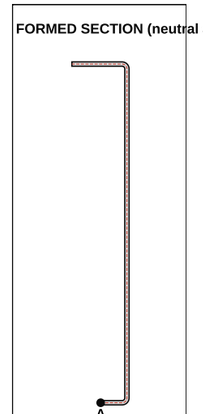

Flats from A: 17.5 / 233.7 / 37.5 mm

FORMED VIEW (reference, not to scale)

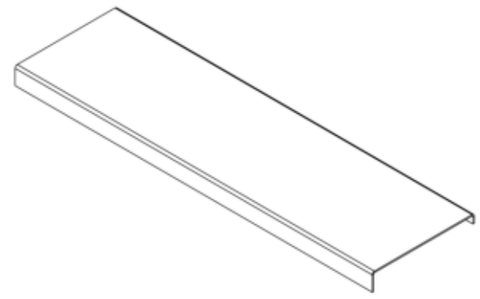

NOTES: (1) Hat/channel section with unequal legs (17.5 and 37.5 mm). Short leg first.

VELD ARMOUR

BUILT FOR THE VELD

CNC / PRESS-BRAKE DATA PACK

PART NO.
VA-BB-12

TITLE
Centre panel P2 (top plate) - FLAT PATTERN

MATERIAL **304 SS 2B**	THICKNESS **3 mm**	QTY / ASSY **1**
FLAT SIZE 835.0 x 288.7	NET MASS 5.73 kg	K-FACTOR 0.46 (air bend, 304)
BENDS 2	SOURCE ITEM #12	DXF VA-BB-12_Centre_panel_P2_3mm.dxf
TOL. LINEAR +/- 0.5 mm	TOL. ANGULAR +/- 1 deg	FINISH Deburr; brush; passivate

Veld Armour (Pty) Ltd - proprietary; not for distribution without written consent