
FLAT PATTERN - viewed from bend-note face (UP = toward viewer) scale 1:5

red dash-dot = BEND UP blue dash-dot = BEND DOWN green = ETCH/mark datum A = bottom-left corner of flat

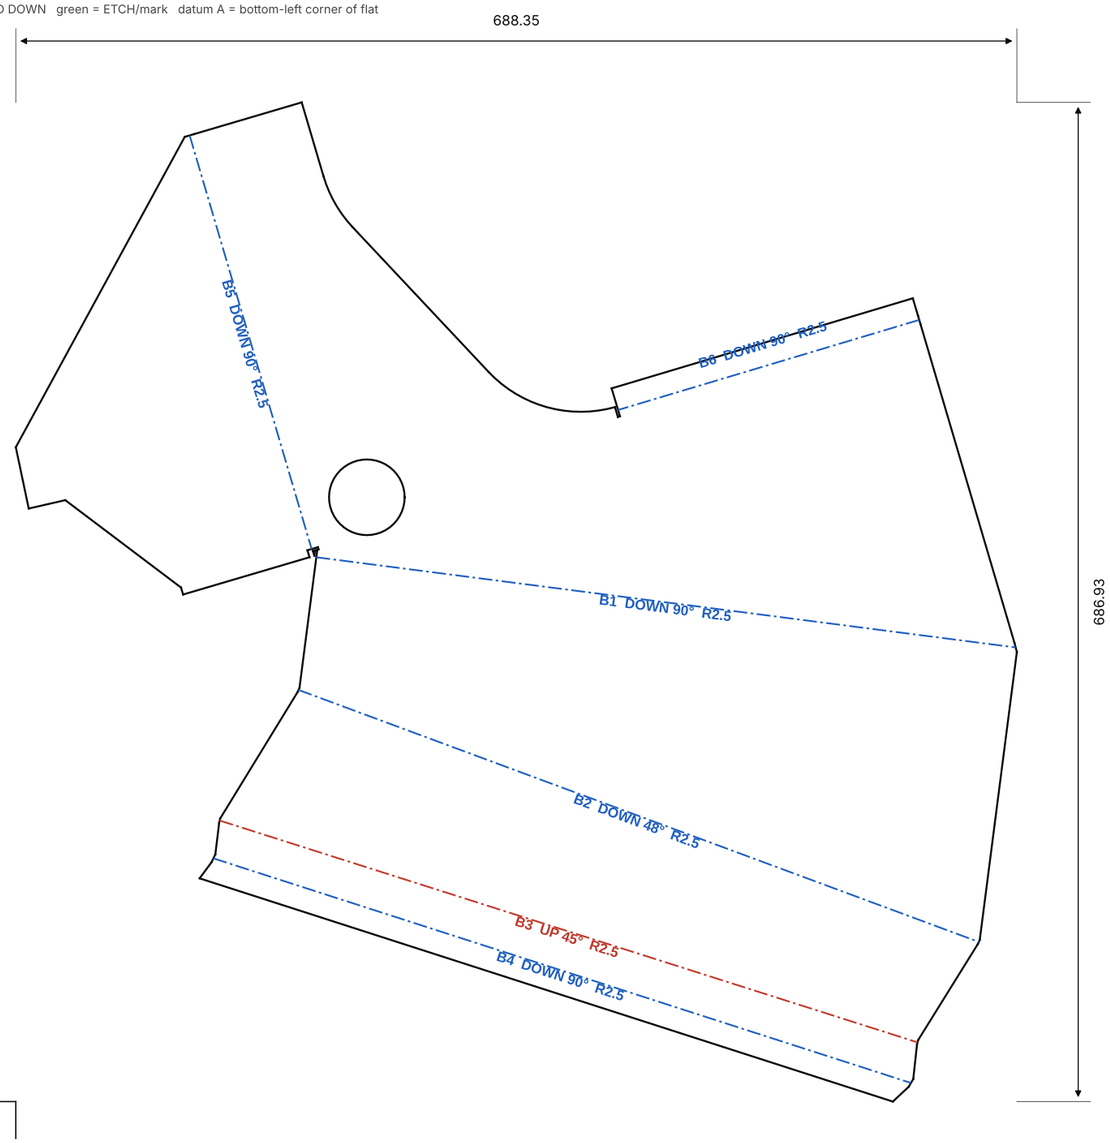

BEND TABLE


No	Dir	Angle	R in	From A	BA	BD	V-die
B1	DOWN	90°	2.5	see view	6.00	5.00	20
B2	DOWN	48°	2.5	see view	3.20	1.70	20
B3	UP	45°	2.5	see view	3.00	1.56	20
B4	DOWN	90°	2.5	see view	6.00	5.00	20
B5	DOWN	90°	2.5	see view	6.00	5.00	20
B6	DOWN	90°	2.5	see view	6.00	5.00	20

BA = bend allowance, BD = bend deduction (mm), K = 0.44, inside radius as listed.
V-die = recommended opening (mm). "From A" = bend-line centre from datum edge.

FORMED SECTION (neutral axis, to scale)

Non-parallel bends - see formed view and assembly sheet for orientation.

FORMED VIEW (reference, not to scale)

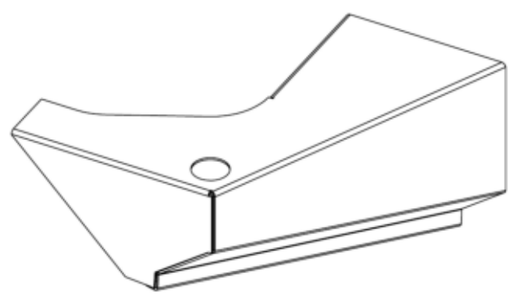

NOTES: (1) Non-parallel bends: form the short 90 deg corner flanges last, after the 48/45/90 return lip. (2) Suggested sequence: B2 (48 deg) > B3 (45 deg up) > B4 (90 deg lip) > B1 (long 90) > B5, B6 (corner flanges).

VELD ARMOUR

BUILT FOR THE VELD

CNC / PRESS-BRAKE DATA PACK

PART NO.
VA-BB-02

TITLE
End panel (item 2) - FLAT PATTERN

MATERIAL	THICKNESS	QTY / ASSY
S355JR	**3 mm**	**1**
FLAT SIZE	NET MASS	K-FACTOR
688.3 × 686.9	6.25 kg	0.44 (air bend)
BENDS	SOURCE ITEM	DXF
6	#2	VA-BB-02_End_panel_3mm.dxf
TOL. LINEAR	TOL. ANGULAR	FINISH
+/- 0.5 mm	+/- 1 deg	Deburr; powder coat

Veld Armour (Pty) Ltd - proprietary; not for distribution without written consent