FLAT PATTERN - viewed from bend-note face (UP = toward viewer) scale 1:5

red dash-dot = BEND UP blue dash-dot = BEND DOWN green = ETCH/mark datum A = bottom-left corner of flat

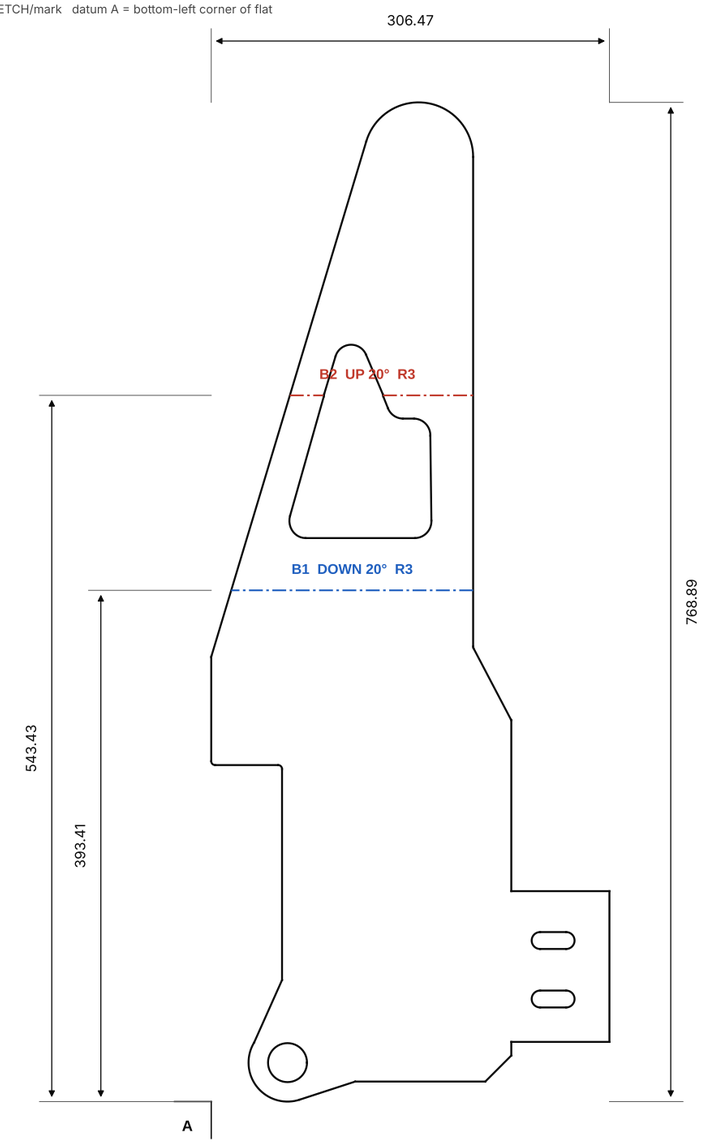

BEND TABLE

No	Dir	Angle	R in	From A	BA	BD	V-die
B1	DOWN	20°	3	393.41 (Y)	1.82	1.01	30
B2	UP	20°	3	543.43 (Y)	1.82	1.01	30

BA = bend allowance, BD = bend deduction (mm), K = 0.44, inside radius as listed.
V-die = recommended opening (mm). "From A" = bend-line centre from datum edge.

FORMED SECTION (neutral axis, to scale)

Flats from A: 393.4 / 150.0 / 225.5 mm

FORMED VIEW (reference, not to scale)

NOTES: (1) Two opposed 20 deg bends form a joggle - set back gauge from the slotted foot (datum edge A). (2) Lug (VA-BB-07) welds over the dia 30 hole; R30 boss on this part matches lug outer radius.

VELD ARMOUR

BUILT FOR THE VELD

CNC / PRESS-BRAKE DATA PACK

PART NO.
VA-BB-03

TITLE
Upright RH - FLAT PATTERN

MATERIAL **S355JR**	THICKNESS **5 mm**	QTY / ASSY **1**
FLAT SIZE 306.5 × 768.9	NET MASS 4.61 kg	K-FACTOR 0.44 (air bend)
BENDS 2	SOURCE ITEM #3	DXF VA-BB-03_Upright_RH_5mm.dxf
TOL. LINEAR +/- 0.5 mm	TOL. ANGULAR +/- 1 deg	FINISH Deburr; powder coat

Veld Armour (Pty) Ltd - proprietary; not for distribution without written consent