
FLAT PATTERN - viewed from bend-note face (UP = toward viewer) scale 1:5

red dash-dot = BEND UP blue dash-dot = BEND DOWN green = ETCH/mark datum A = bottom-left corner of flat

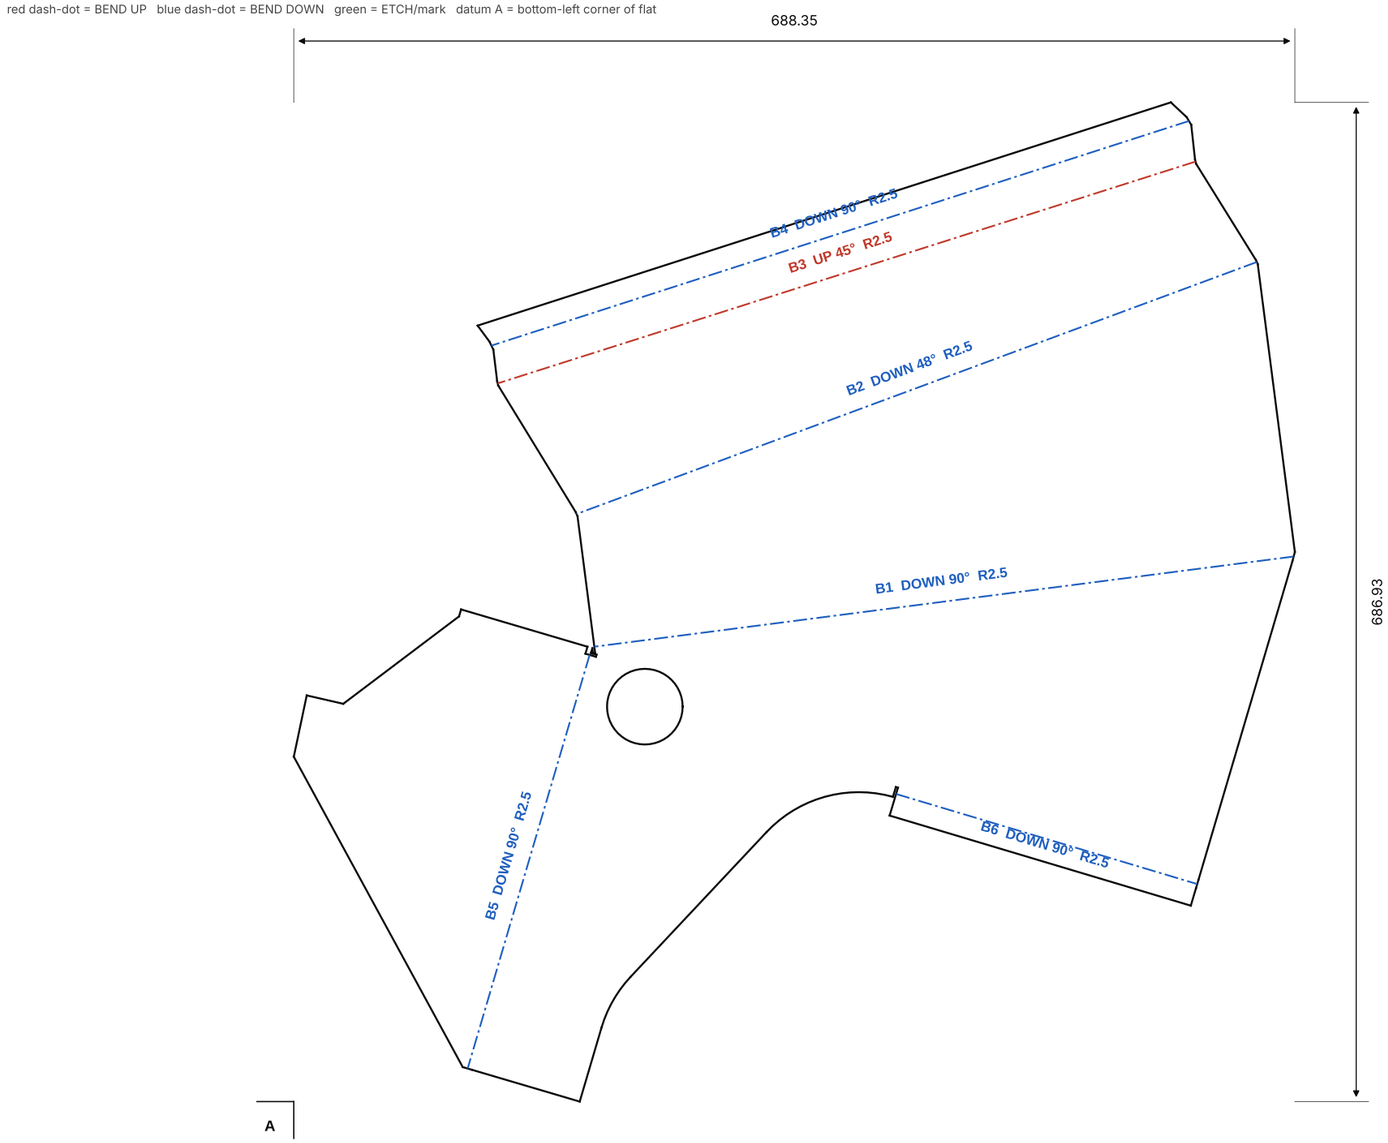

BEND TABLE


No	Dir	Angle	R in	From A	BA	BD	V-die
B1	DOWN	90°	2.5	see view	6.09	4.91	24
B2	DOWN	48°	2.5	see view	3.25	1.65	24
B3	UP	45°	2.5	see view	3.05	1.51	24
B4	DOWN	90°	2.5	see view	6.09	4.91	24
B5	DOWN	90°	2.5	see view	6.09	4.91	24
B6	DOWN	90°	2.5	see view	6.09	4.91	24

BA = bend allowance, BD = bend deduction (mm), K = 0.46, inside radius as listed. V-die = 8T opening (mm).
"From A" = bend-line centre from datum edge. 304: ~1.5x mild-steel tonnage, 2-3 deg extra springback.
WARNING: B1, B2, B3, B4, B5, B6 inside R < 1T - cracking risk in 304; use R >= 3 tooling or prove on first-off.

FORMED SECTION (neutral axis, to scale)

Non-parallel bends - see formed view and assembly sheet for orientation.

FORMED VIEW (reference, not to scale)

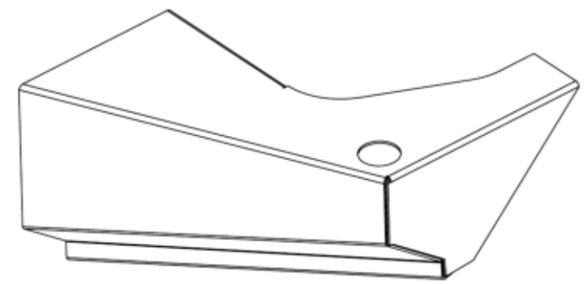

NOTES: (1) Mirror of VA-BB-02. Same bend sequence as VA-BB-02.

VELD ARMOUR

BUILT FOR THE VELD

CNC / PRESS-BRAKE DATA PACK

PART NO.
VA-BB-04

TITLE
End panel, opposite hand (item 4) - FLAT PATTERN

MATERIAL	THICKNESS	QTY / ASSY
304 SS 2B	**3 mm**	**1**
FLAT SIZE	NET MASS	K-FACTOR
688.3 × 686.9	6.32 kg	0.46 (air bend, 304)
BENDS	SOURCE ITEM	DXF
6	#4	VA-BB-04_End_panel,_opposite_hand_3mm.dxf
TOL. LINEAR	TOL. ANGULAR	FINISH
+/- 0.5 mm	+/- 1 deg	Deburr; brush; passivate

Veld Armour (Pty) Ltd - proprietary; not for distribution without written consent