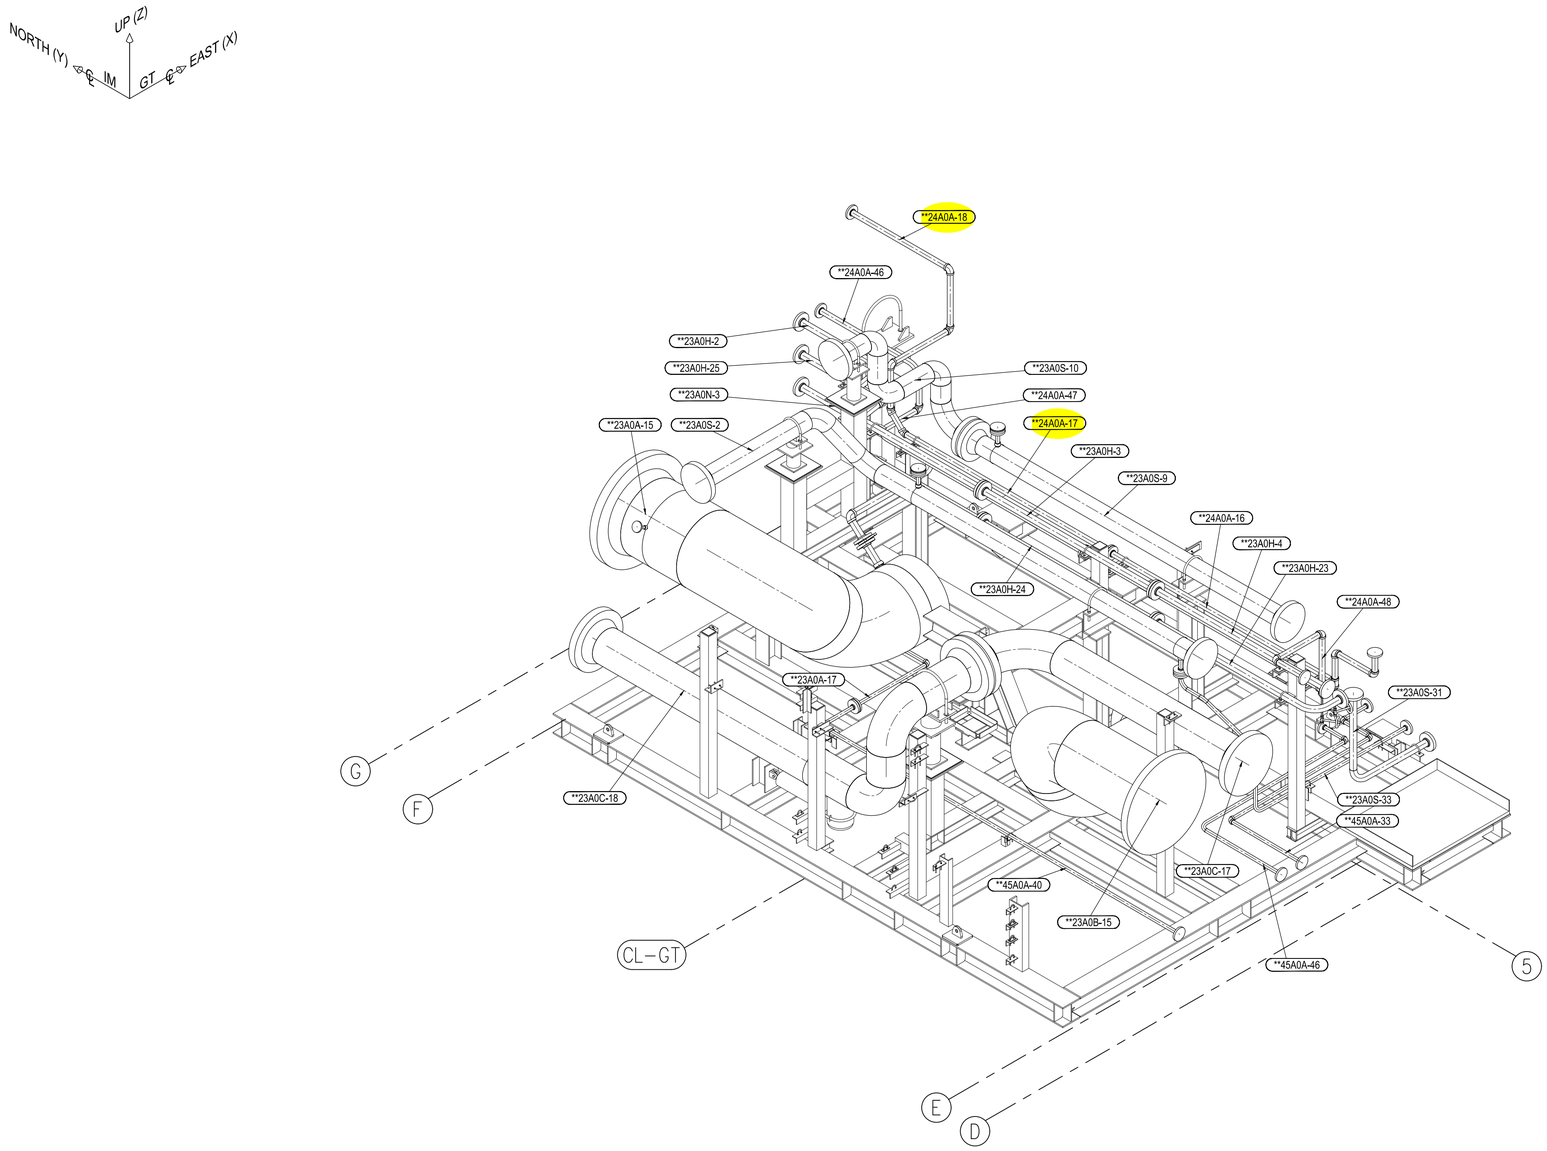


SD-2 ISOMETRIC VIEW
LOOKING NORTH EAST

REFERENCES

MDL ITEM #	MPWA MDL DESCRIPTION	DETAILS FOR
1	FOUNDATION PLAN AND SUMMARY LOADING DATA FOR MODULE GT ENCLOSURE	GENERAL LOCATION
20	GA DRAWING FOR MODULARIZED JAC GT ENCLOSURE	GENERAL LOCATION

NOTES

1. DIMENSIONS : MM [INCHES]
2. LABELING
   - **XXXXXX —— PIPE LINE
   - (**XXX-X) —— SPOOL NO
3. SOME STRUCTURAL MEMBERS AND GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. WP : WORKING POINT FOR SLOPE LINE

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	15.MAY.2024	S.H.	M.F.	N.K.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:

This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2024 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: –

ITEM NO: MDL-150

DWG NAME: SD-2 PIPING SUPPORT & SPOOLS GENERAL ARRANGEMENTS DRAWINGS (GA FOR SPOOLS)


REF.DWG.NO.: –


PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	1/1	1/25	A1

DRAWING NO: 2E00140-PI-094-001-SD-2

REV.: 0



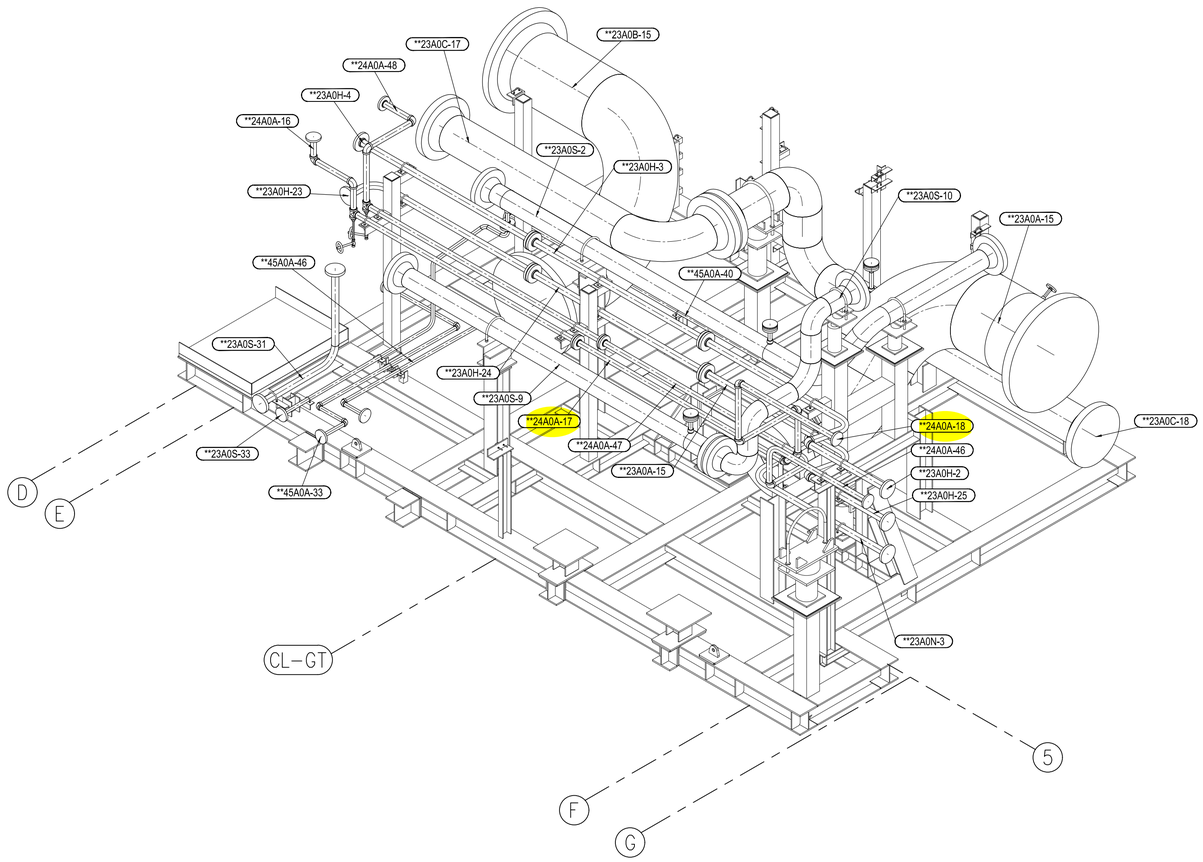

SD-2 ISOMETRIC VIEW
LOOKING SOUTH WEST

REFERENCES

MDL ITEM #	MPWA MDL DESCRIPTION	DETAILS FOR
1	FOUNDATION PLAN AND SUMMARY LOADING DATA FOR MODULE GT ENCLOSURE	GENERAL LOCATION
20	GA DRAWING FOR MODULARIZED JAC GT ENCLOSURE	GENERAL LOCATION

NOTES

1. DIMENSIONS : MM [INCHES]
2. LABELING
   - **XXXXXX —— PIPE LINE
   - (**XXX-X) —— SPOOL NO
3. SOME STRUCTURAL MEMBERS AND GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. WP : WORKING POINT FOR SLOPE LINE

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	15.MAY.2024	S.H.	M.F.	N.K.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2024 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: –

ITEM NO: MDL-150

DWG NAME: SD-2 PIPING SUPPORT & SPOOLS GENERAL ARRANGEMENTS DRAWINGS (GA FOR SPOOLS)


REF.DWG.NO.: –

PREPARED BY: cimtas


JOB NO	SHEET	SCALE	SIZE
2E00140	1/1	1/25	A1

DRAWING NO: 2E00140-PI-094-001-SD-2


REV.: 0

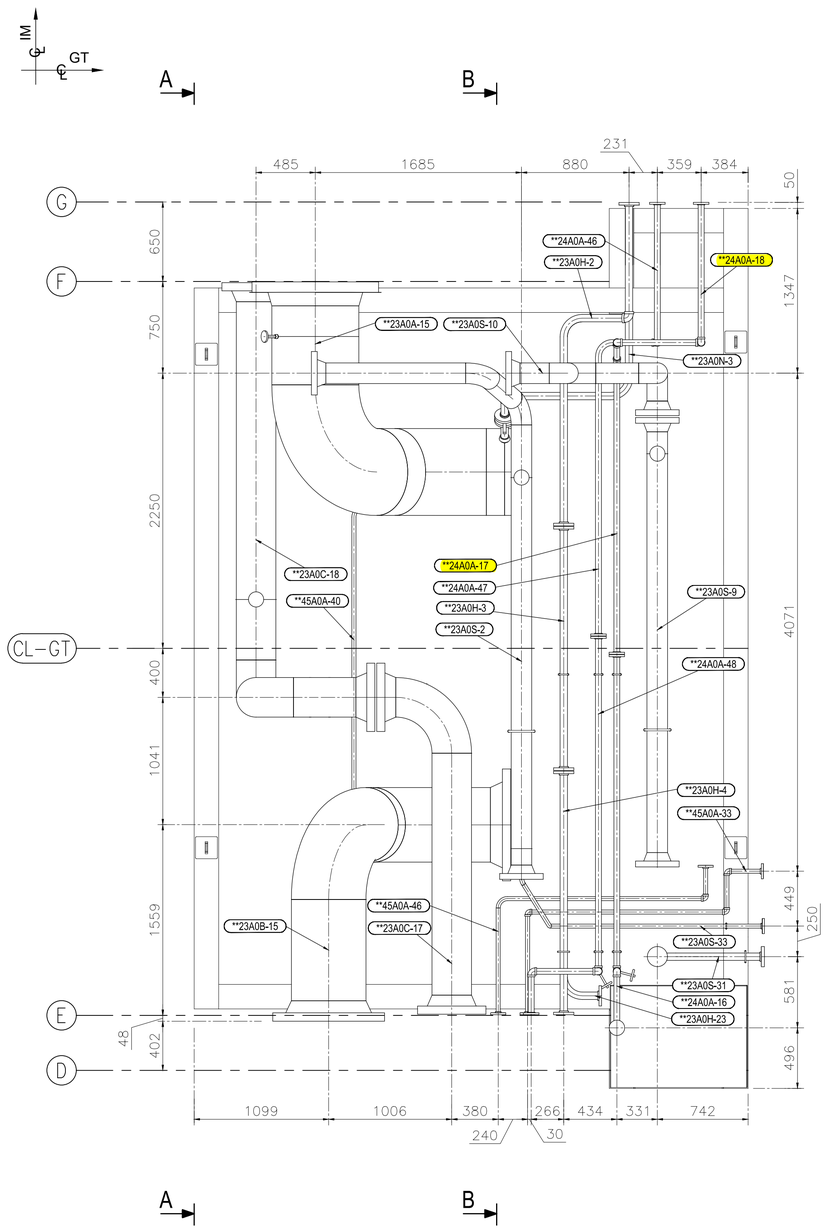

SD-2 PLAN VIEW

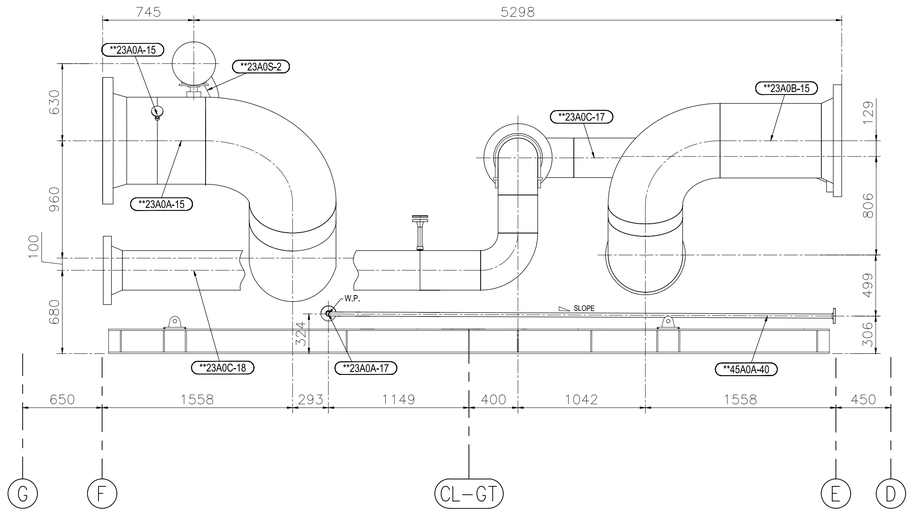

SD-2 SECTION 'A-A'
(LOOKING EAST)

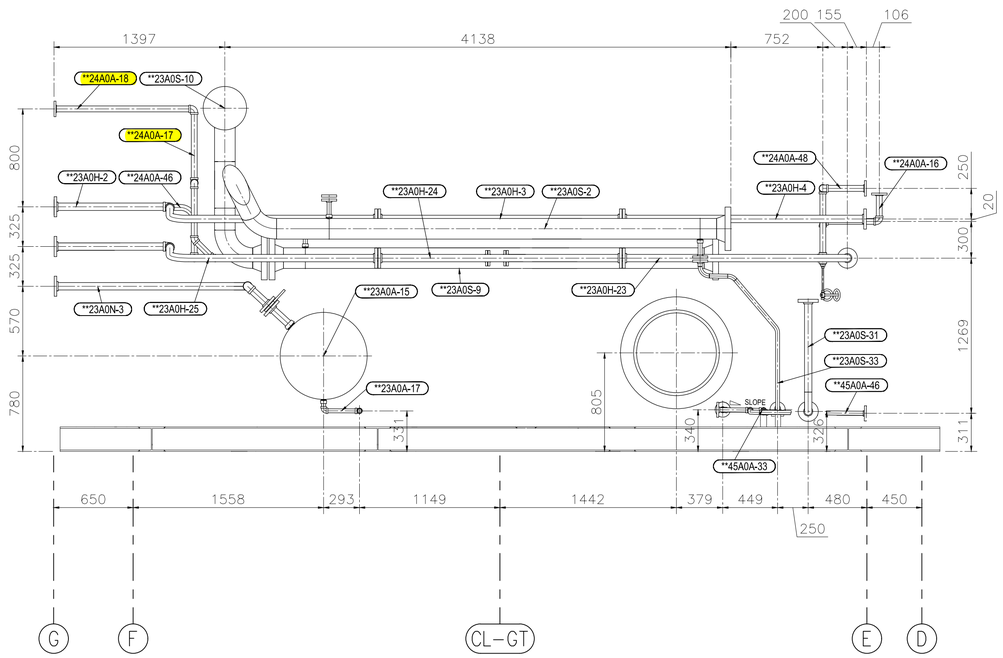

SD-2 SECTION 'B-B'
(LOOKING EAST)

REFERENCES

MDL ITEM #	MPWA MDL DESCRIPTION	DETAILS FOR
1	FOUNDATION PLAN AND SUMMARY LOADING DATA FOR MODULE GT ENCLOSURE	GENERAL LOCATION
20	GA DRAWING FOR MODULARIZED JAC GT ENCLOSURE	GENERAL LOCATION

NOTES

1. DIMENSIONS : MM [INCHES]
2. LABELING
   - **XXXXXX —— PIPE LINE
   - (**XXX-X) —— SPOOL NO
3. SOME STRUCTURAL MEMBERS AND GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. WP : WORKING POINT FOR SLOPE LINE

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	15.MAY.2024	S.H.	M.F.	N.K.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2024 Mitsubishi Power Americas, Inc.

CUSTOMER JOB NO: –

ITEM NO: MDL-150

DWG NAME: SD-2 PIPING SUPPORT & SPOOLS GENERAL ARRANGEMENTS DRAWINGS (GA FOR SPOOLS)

REF.DWG.NO.: –


PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	1/1	1/25	A1

DRAWING NO: 2E00140-PI-094-001-SD-2

REV.: 0

REVISION RECORD

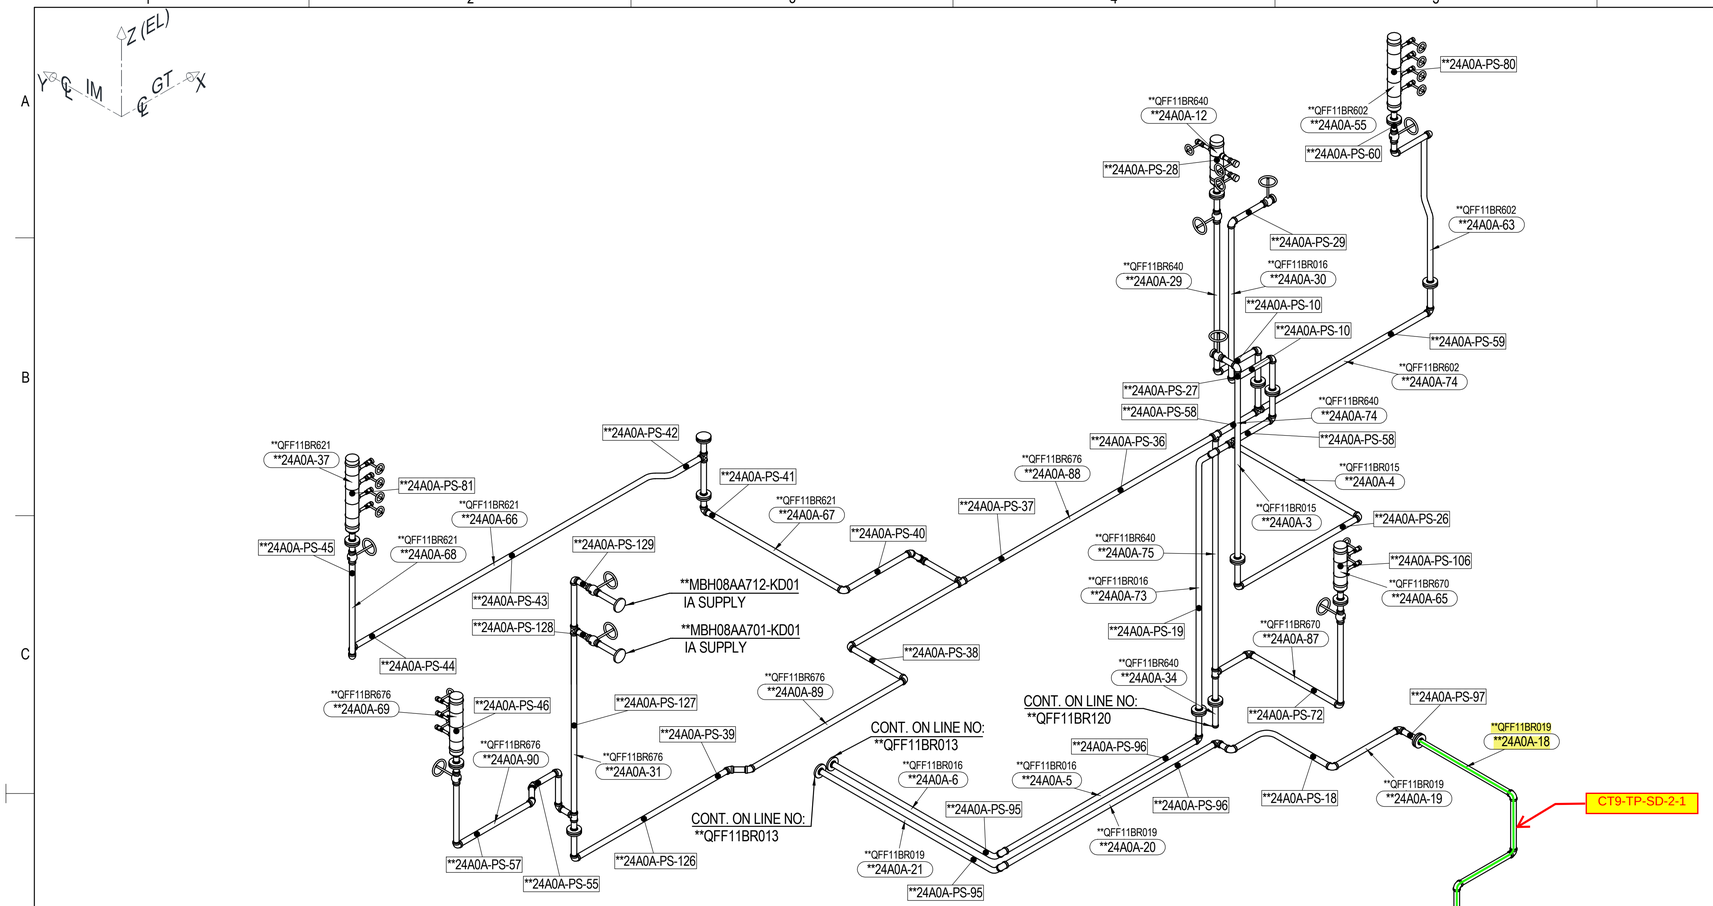

LEGEND:

PIPELINE / SPOOL	INDICATES PIPELINE ON THE TOP AND SPOOL ON THE BOTTOM.
SUPPORT	INDICATES SUPPORT.
TERMINAL POINT	INDICATES TERMINAL POINT.
– – – – – –	INDICATES TRACING.

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	**N05-003580**	**0**	**24A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**INSTRUMENT AIR PIPING**		
APPROVED BY:	U. KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-QFF-BR-AA		
			P&ID DRAWING NUMBER: N01-PID-QFF-00-02		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE: -	PAGE NUMBER: 5 OF 8	

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2


MITSUBISHI POWER ENGINEERING


PLANT ENGINEERING

DEPARTMENT:

SECTION:

DRAWING DISTRIBUTION LIST



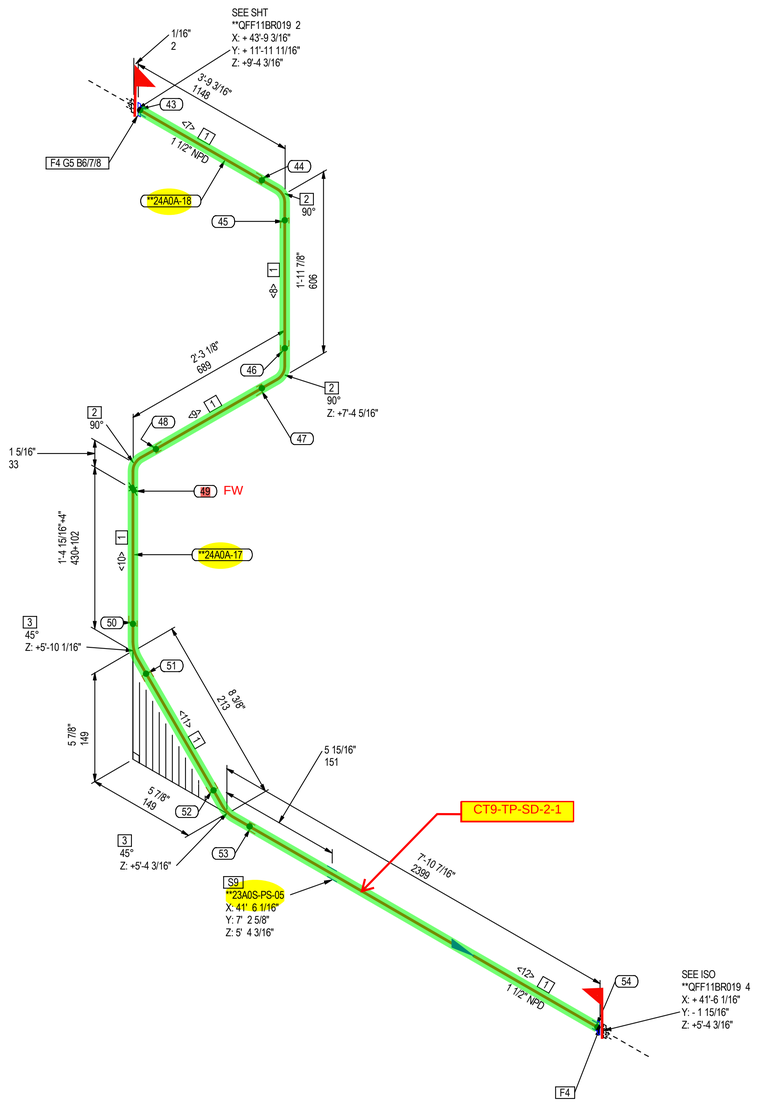

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	17.5'
2	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMCKAWBVZZAAGALO	3
3	45 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMBWAWBVZZAAGALO	2
4	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1 1/2	MFABAHABZZAADALO	2

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
5	GASKET, FLAT RING, CL150, 0.0625" THK, ASME B16.21, COMPRESSED NON ASBESTOS FIBER	1 1/2	MITAHAAAALBMNUS	1
6	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 13-UNC - 3.5 in. Length	1/2	MBAZZACZZIAGBLJZ	4
7	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 13-UNC	1/2	MNOZZACAAZPCJAFU	8
8	WASHER, SPECIAL SHAPED LOCK, 1.5in NPD, 0.8mm THK, MHPSA G1-90942, ASTM A240-304	1/2	MWQZZZZBUIBBAMDP	8
	PIPE SUPPORTS			
9	PIPE SUPPORT	1 1/2	**23A0S-PS-05	1
	SPOOLS			
	**24A0A-17, **24A0A-18			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<7>	3'7 9/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<8>	1'9 1/4"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<9>	2'0 1/2"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<10>	1'8 1/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<11>	6 5/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<12>	7'9 1/4"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX## ###⟩ INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✱ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✱ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
43	SW	S	1 1/2"	1
44	SW	S	1 1/2"	1
45	SW	S	1 1/2"	1
46	SW	S	1 1/2"	1
47	SW	S	1 1/2"	1
48	SW	S	1 1/2"	1
49	SW	S	1 1/2"	1
50	SW	S	1 1/2"	1
51	SW	S	1 1/2"	1
52	SW	S	1 1/2"	1
53	SW	S	1 1/2"	1
54	SW	S	1 1/2"	1

PIPING SPEC:	SAC	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	IA, INSTRUMENT AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	150.00 psig / 1.03 MPag							
TEST PRESS.:	225.00 psig / 1.55 MPag							
MAX. TEMP:	140 F / 60 C							
INSULATION SPEC:	NOT INSULATED							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
⊗ FW - FIELD WELD
⊗ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER: / REV. NO.: / SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	N05-003580 / 0 / 24A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	INSTRUMENT AIR PIPING
APPROVED BY:	U. KASINATHAN	10/31/2025	INTERNAL TO GT PACKAGE
			FOR FABRICATION & ERECTION
			N05-ISO-QFF-BR-AA
			P&ID DRAWING NUMBER: N01-PID-QFF-00-02
			M501JAC GAS TURBINE
			PROJECT CODE: - / P&ID: -
			PIPELINE: **QFF11BR019 / PAGE NUMBER: 3 OF 6


EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING / PLANT ENGINEERING
DEPARTMENT: / SECTION:
DRAWING DISTRIBUTION LIST

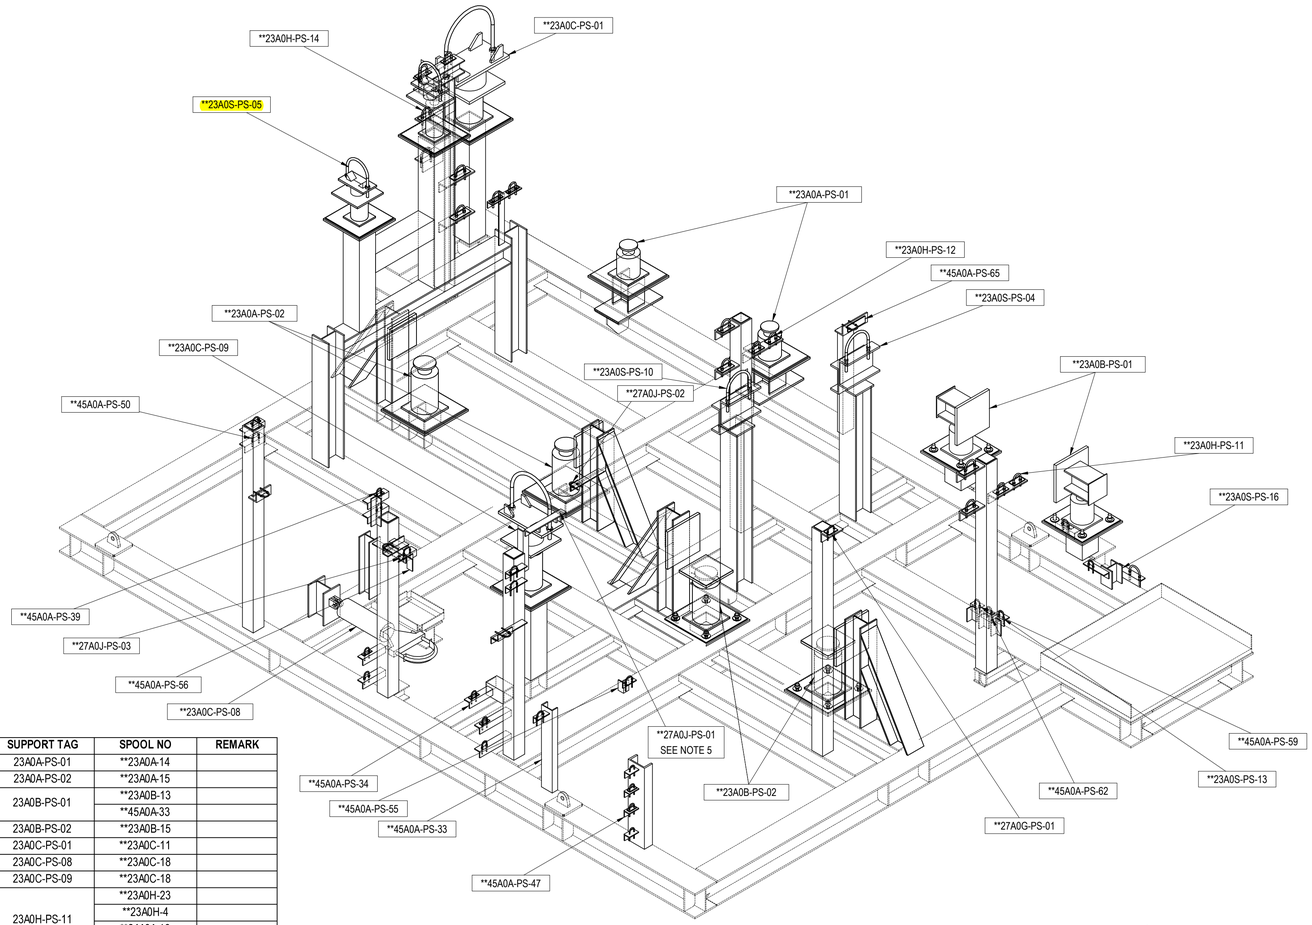

SD-2 ISOMETRIC VIEW

NO	SUPPORT TAG	SPOOL NO	REMARK
1	23A0A-PS-01	**23A0A-14	
2	23A0A-PS-02	**23A0A-15	
3	23A0B-PS-01	**23A0B-13	
4		**45A0A-33	
5	23A0B-PS-02	**23A0B-15	
6	23A0C-PS-01	**23A0C-11	
7	23A0C-PS-08	**23A0C-18	
8	23A0C-PS-09	**23A0C-18	
9	23A0H-PS-11	**23A0H-23	
		**23A0H-4	
		**24A0A-16	
		**24A0A-48	
10	23A0H-PS-12	**23A0H-24	
		**23A0H-3	
		**24A0A-16	
		**24A0A-48	
11	23A0H-PS-14	**23A0H-2	
		**23A0H-25	
		**23A0N-3	
		**24A0A-46	
12	23A0S-PS-04	**23A0S-9	
13	23A0S-PS-05	**23A0H-2	
		**23A0H-25	
		**23A0S-10	
		**23A0S-2	
		**24A0A-17	
		**24A0A-47	
14	23A0S-PS-10	**23A0S-2	
15	23A0S-PS-13	**23A0S-33	
16	23A0S-PS-16	**23A0S-31	
		**23A0S-33	
17	27A0G-PS-01	**27A0G-6	
18	27A0J-PS-01	**27A0J-1	SEE NOTE 5
19	27A0J-PS-02	**27A0J-6	
20	27A0J-PS-03	**27A0J-9	
21	45A0A-PS-33	**45A0A-19	
22	45A0A-PS-34	**27A0F-9	
		**27A0G-8	
		**45A0A-13	
		**45A0A-19	
		**45A0A-24	
		**45A0A-30	
23	45A0A-PS-39	**27A0F-9	
		**27A0G-8	
		**45A0A-13	
		**45A0A-25	
		**45A0A-30	
24	45A0A-PS-47	**45A0A-12	
		**45A0A-18	
		**45A0A-24	
		**45A0A-29	
25	45A0A-PS-50	**27A0F-9	
		**27A0G-8	
		**45A0A-13	
26	45A0A-PS-55	**45A0A-40	
27	45A0A-PS-56	**45A0A-40	
28	45A0A-PS-59	**45A0A-46	
29	45A0A-PS-62	**45A0A-33	
30	45A0A-PS-65	**45A0A-37	

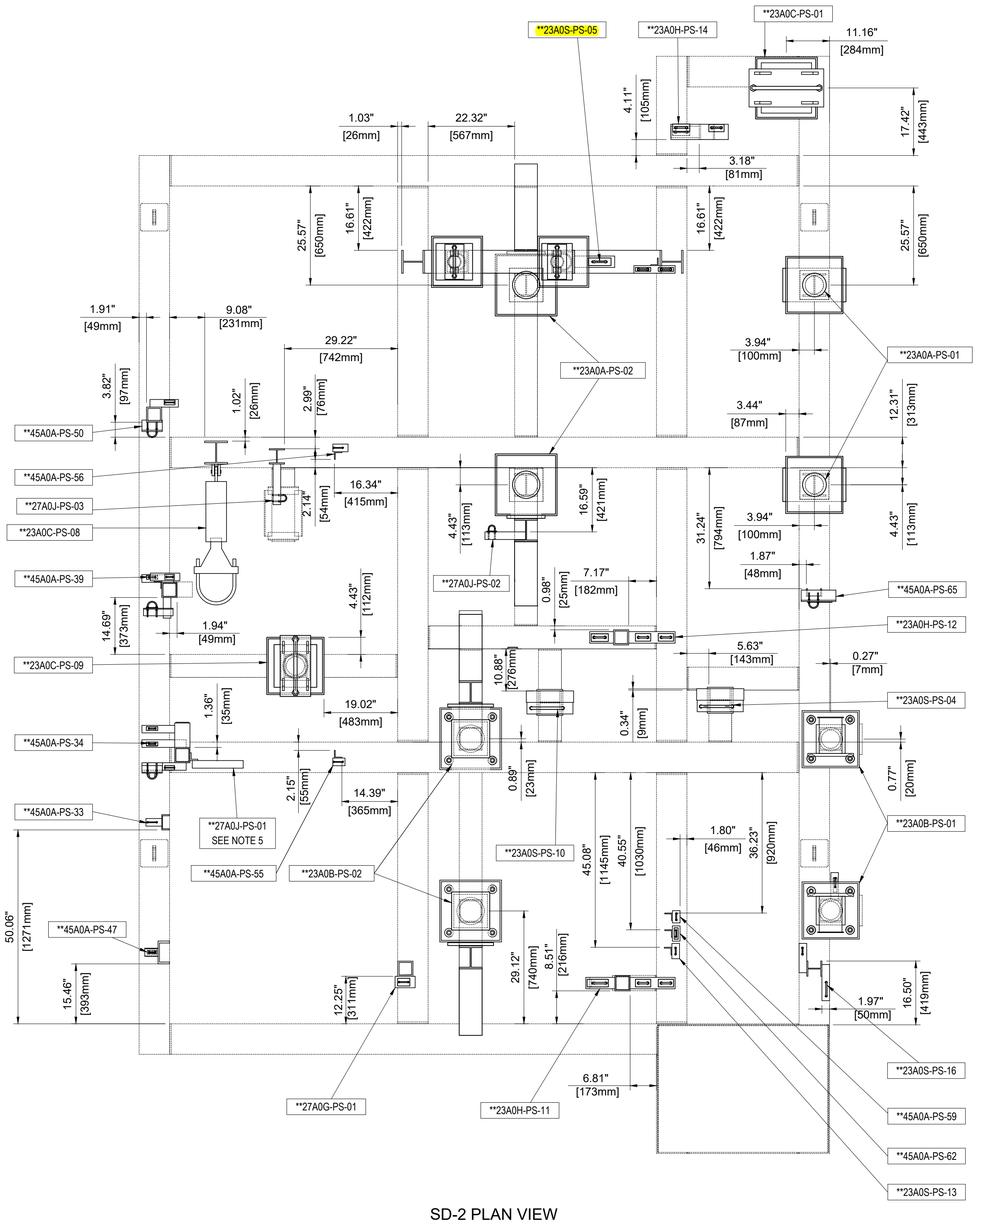

SD-2 PLAN VIEW

LOOKING FUEL GAS UNIT SIDE

REFERENCES

MDL ITEM #	MHPSA MDL DESCRIPTION	DETAILS FOR
N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	PIPE SUPPORT DRAWINGS
N/A	MIDDLE PRESSURE BLEED AIR PIPING (23A0B)	"
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	SEAL AIR PIPING (23A0H)	"
N/A	4S FILTER BLEED AIR PIPING (23A0N)	"
N/A	ENHANCED COOLING AIR SUPPLY PIPING (23A0S)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	LUBE OIL TURBINE SUPPORT COOLING SUPPLY PIPING (27A0F)	"
N/A	LUBE OIL TURBINE SUPPORT COOLING RETURN PIPING (27A0G)	"
N/A	EXHAUST CASING DRAIN PIPING (27A0J)	"
N/A	BLADE WASHING DRAIN PIPING (45A0A)	"
67	GT ENCLOSURE SD-2 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXXX-XX-XX → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	02.09.2024	N.B.	S.S.	S.O.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-161

DWG NAME: SD-2 SUPPORTS GENERAL ARRANGEMENT DRAWING

REF.DWG.NO.: -

PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	1/1	1/20	A1

DRAWING NO: 2E00140-CI-026-150

REV.: 0

SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	30650
LINE NO:	**MBH01BR128

F(X) =	-48	lbs
F(Y) =	0	lbs
F(Z) =	-37	lbs
(X)=	-0.3	inch
(Y)=	1.35	inch
(Z)=	0	inch
Ø OD =	2.38	inch
Insul=	2	inch
Temp.=	590	°F

NODE:	4945
LINE NO:	**MBH06BR016

Input F(H) =	395	lbs
F(H) =	417	lbs
F(C) =	449	lbs
F(P) =	449	lbs
later.(Y)=	0.74	inch
horiz.(X)=	1.68	inch
vert.(Z)=	0.34	inch
Ø OD =	6.63	inch
Insul=	1.5	inch
Temp.=	482	°F
ΔF =	8	%
Spring rate =	95.135	#/in
tot Tvl =	3.94	inch
Preset=	2.72	inch
tri Tvl =	0.34	inch
Tvl res dn/up=	1.22/2.40	inch

NODE:	30240
LINE NO:	**MBH01BR202

F(X) =	0	lbs
F(Y) =	-87	lbs
F(Z) =	0	lbs
(X)=	0	inch
(Y)=	0.72	inch
(Z)=	0	inch
Ø OD =	2.38	inch
Insul=	2	inch
Temp.=	590	°F

NODE:	4275
LINE NO:	**MBH06BR014

Input F(H) =	295	lbs
F(H) =	319	lbs
F(C) =	383	lbs
F(P) =	383	lbs
later.(Y)=	0.58	inch
horiz.(X)=	1.41	inch
vert.(Z)=	0.34	inch
Ø OD =	6.63	inch
Insul=	1.5	inch
Temp.=	482	°F
ΔF =	20	%
Spring rate =	190.270	#/in
tot Tvl =	1.97	inch
Preset=	1.02	inch
tri Tvl =	0.34	inch
Tvl res dn/up=	0.94/0.67	inch


NODE:	No C2
LINE NO:	**QFF11BR120

Pipe OD =	1.9	inch
Pipe DesignTemp.=	140	°F
Insul=	Not Insulated	

NODE:	No C2
LINE NO:	**QFF11BR019


Pipe OD =	1.9	inch
Pipe DesignTemp.=	140	°F
Insul=	Not Insulated	


MODULE NO:
SD-2

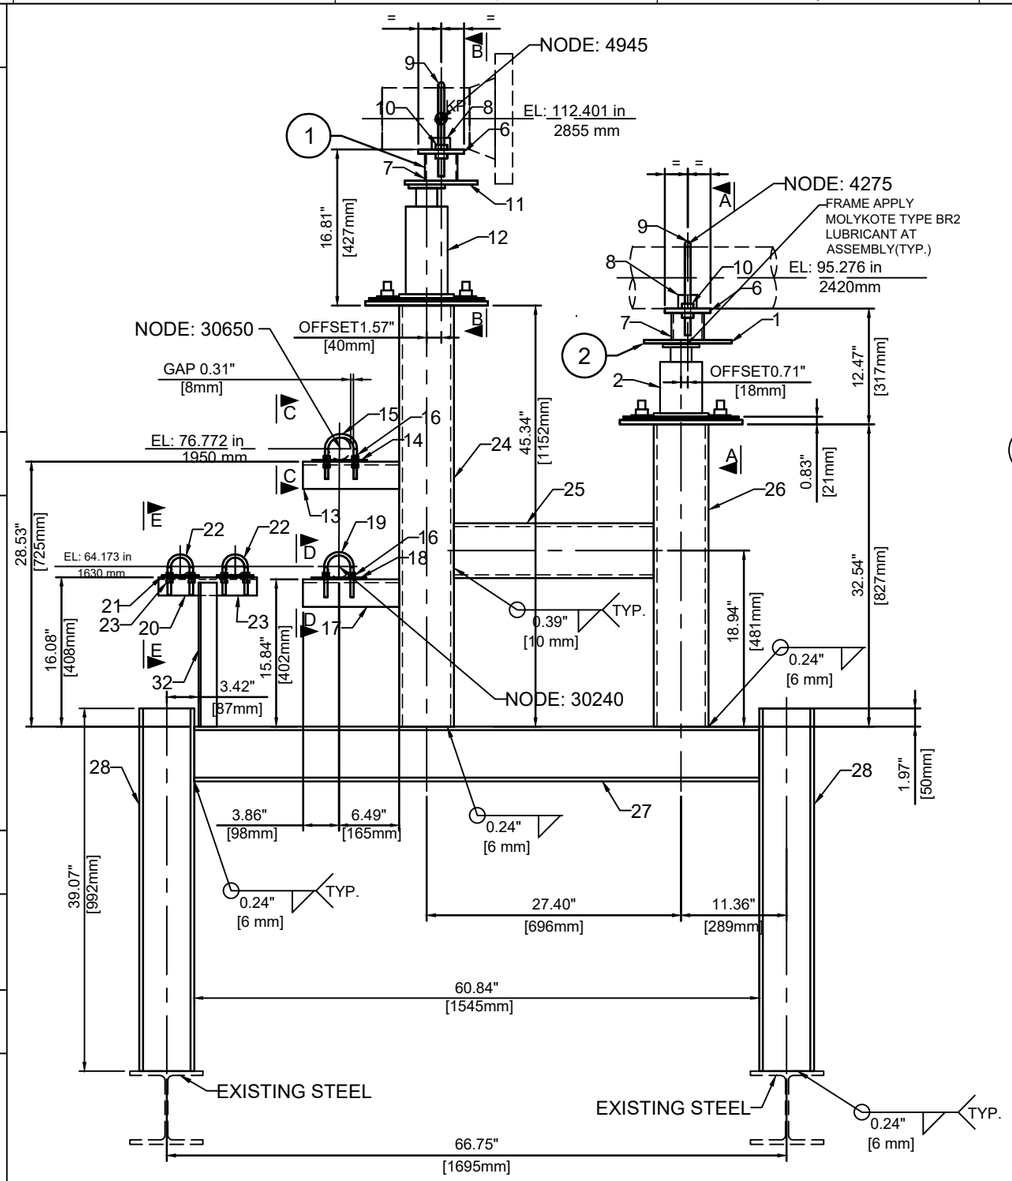


LOOKING LUBE OIL UNIT SIDE
1:15

15 U BOLT 2.37"




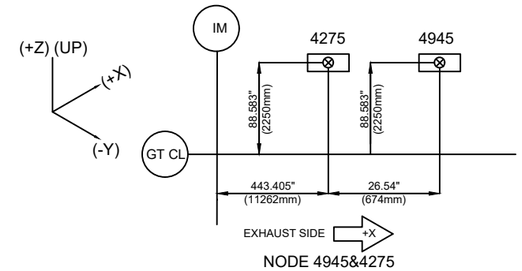


NODE 4945&4275



NODE 30650&30240

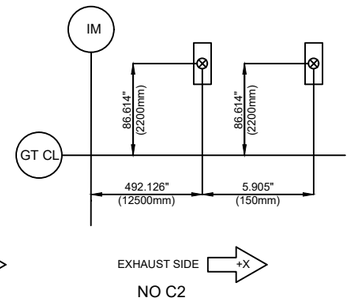

NO C2

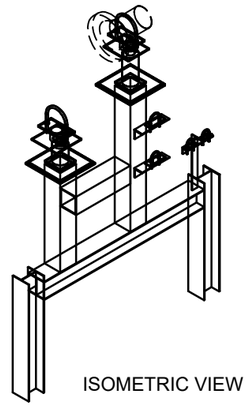

ISOMETRIC VIEW

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY	
SUPPORT NUMBER:	**23A0S-PS-05

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER