



TL3365 SERIES TACT SWITCH



APPLICATIONS / MARKETS

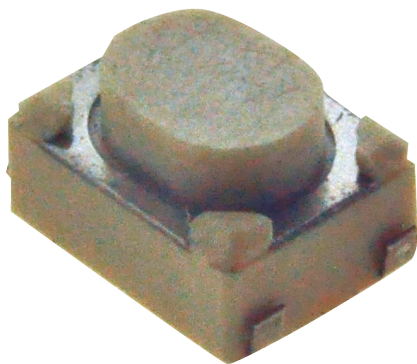


Audio / Visual



Computer Peripherals



Consumer Electronics



Instrumentation



Telecommunication



Medical Equipment

RoHS

SPECIFICATIONS

Electrical Rating: 50mA @ 12VDC
Electrical Life: 100,000 Cycles
Mechanical Life: 100,000 Cycles
Contact Resistance: 100mΩ Max. Initial
Insulation Resistance: 100M Ω at 100VDC
Dielectric Strength: 250VAC for 1 min.
Operating Temperature: -20°C to 70°C
Storage Temperature: -30°C to 80°C
Operating Force: 180 gf
Travel: 0.2mm
Contact Arrangement: SPST

FEATURES & BENEFITS

- Ultraminiature
- Surface mount

PART NUMBER CONFIGURATOR

Series



TL

Model



3365

Actuator
Option



A - 2.25mm

Actuation
Force



F180 - 180 gf

Contact
Material



Q - Silver

Termination



G - Gullwing

Specifications subject to change without notice 1.4.2019



E-SWITCH®





www.e-switch.com

800.867.2717

1

TL3365 SERIES TACT SWITCH

BODY DIMENSIONS

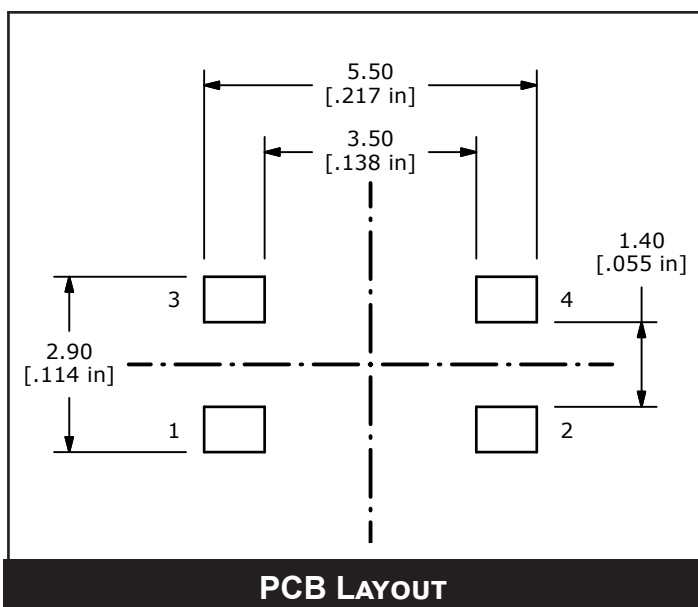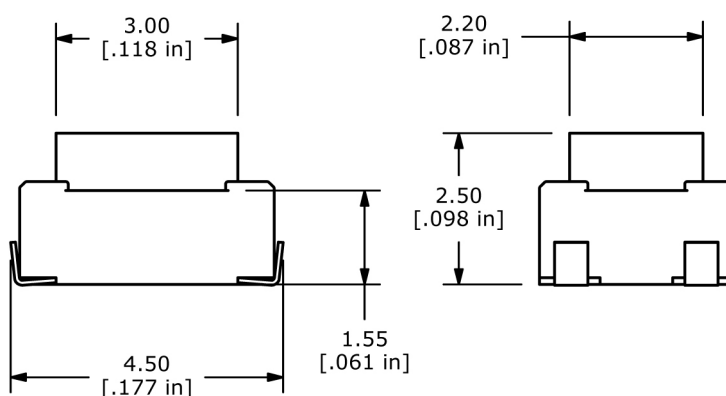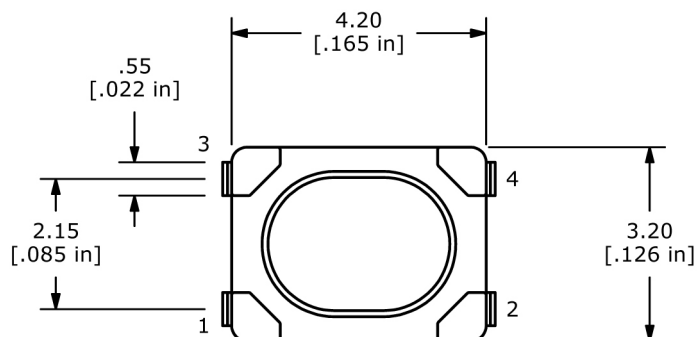

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

E-Switch:

[TL3365AF180QG](#) [TL3365AF250QG](#) [TL3365AF400QG](#)