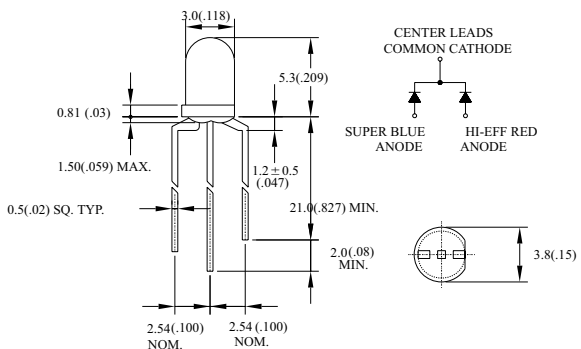
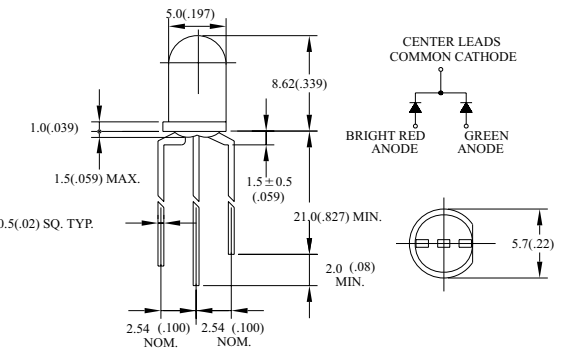
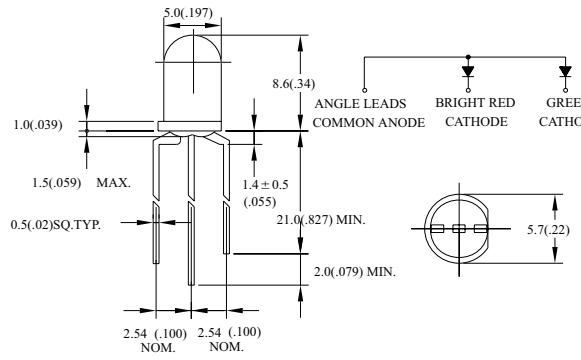
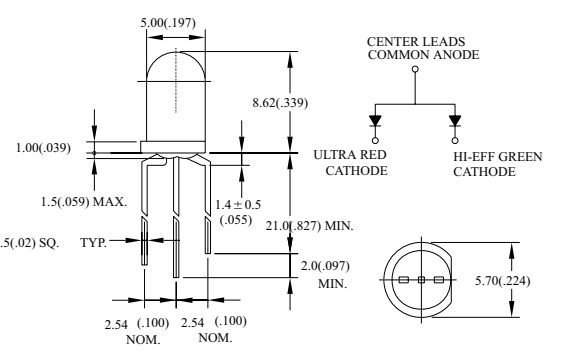


DUAL-CHIP & TRI-STATE LED LAMPS(ROUND TYPES)

Package	Part No.	Chip		Lens Appearance	Absolute Maximum Ratings				Electro-optical Data(At 20mA)			Viewing Angle 2 θ 1/2 (deg)	Drawing No.
		Material/ Emittted Color	Peak Wave Length λ p (nm)		Δ λ (nm)	Pd (mw)	If (mA)	Peak (mA)	Vf (V)		Iv (mcd)		
									Typ	Max			
T-1 Standard 1.0" Lead 3 ϕ	BL-BHG201	GaP/GaP /Bright Red	700	White Diffused	90	40	15	50	2.2	2.6	7.0	40	L-158
		GaP/GaP /Yellow Green	568		30	80	30	150	2.2	2.6	35.0		
	BL-BEG201	GaAsP/GaP/Hi-Eff Red	635	White Diffused	45	80	30	150	2.0	2.6	35.0		
		GaP/GaP /Yellow Green	568		30	80	30	150	2.2	2.6	35.0		
	BL-BYG201	GaAsP/GaP Yellow	585	White Diffused	35	80	30	150	2.1	2.6	30.0		
		GaP/GaP /Yellow Green	568		30	80	30	150	2.2	2.6	35.0		
T-13/4 Standard 1.0" Lead 5 ϕ	BL-BHG204	GaP/GaP /Bright Red	700	White Diffused	90	40	15	50	2.2	2.6	8.0	50	L-159
		GaP/GaP /Yellow Green	568		30	80	30	150	2.2	2.6	45.0		
	BL-BEG204	GaAsP/GaP/Hi-Eff Red	635	White Diffused	45	80	30	150	2.0	2.6	45.0		
		GaP/GaP /Yellow Green	568		30	80	30	150	2.2	2.6	45.0		
	BL-BYG204	GaAsP/GaP Yellow	585	White Diffused	35	80	30	150	2.1	2.6	40.0		
		GaP/GaP /Yellow Green	568		30	80	30	150	2.2	2.6	45.0		
T-13/4 Standard 1.0" Lead 5 ϕ	BL-BHG204-A	GaP/GaP /Bright Red	700	White Diffused	90	40	15	50	2.2	2.6	3.5	50	L-160
		GaP/GaP /Yellow Green	568		30	80	30	150	2.2	2.6	20.0		
	BL-BEG204-A	GaAsP/GaP/Hi-Eff Red	635	White Diffused	45	80	30	150	2.0	2.6	20.0		
		GaP/GaP /Yellow Green	568		30	80	30	150	2.2	2.6	20.0		
	BL-BYG204-A	GaAsP/GaP Yellow	585	White Diffused	35	80	30	150	2.1	2.6	18.0		
		GaP/GaP /Yellow Green	568		30	80	30	150	2.2	2.6	20.0		
T-1 3/4- Standard 1.0" Lead 5 ϕ	BL-BHG204-B	GaP/GaP /Bright Red	700	White Diffused	90	40	15	50	2.2	2.6	3.5	50	L-161
		GaP/GaP /Yellow Green	568		30	80	30	150	2.2	2.6	20.0		
	BL-BEG204-B	GaAsP/GaP/Hi-Eff Red	635	White Diffused	45	80	30	150	2.0	2.6	20.0		
		GaP/GaP /Yellow Green	568		30	80	30	150	2.2	2.6	20.0		
	BL-BYG204-B	GaAsP/GaP/ Yellow	585	White Diffused	35	80	30	150	2.1	2.6	18.0		
		GaP/GaP /Yellow Green	568		30	80	30	150	2.2	2.6	20.0		

Remark : 1.Hi-Eff Red / High-Efficiency Red .
2. Trans / Transparent .
3. 2 θ 1/2 The off-axis angle at which the luminous intensity is half the axial luminous intensity .

<p>L-158 BL-Bxx201 Series</p> 	<p>L-159 BL-Bxx204 Series</p> 
<p>L-160 BL-Bxx204-A Series</p> 	<p>L-161 BL-Bxx204-B Series</p> 

Notes: 1.All Dimensions are millimeters (inches).
2.Tolerance is ± 0.25mm (.010").

BRIGHT LED ELECTRONICS CORP.

www.brightled.com.tw

886-2-29591090 FAX:886-2-29547006 • ©2000 BRIGHT LED ELECTRONICS CORP. Specifications subject to change without notice.